

2012 USA PRODUCT CATALOGUE

BRC FuelMaker
via Industria 6, 12062 Cherasco (CN) - Italy
Telephone: +39.0172.48681 Fax: +39.0172.488237
www.brcfuelmaker.it





TABLE OF CONTENTS

	Page
HOME REFUELLING APPLIANCES (HRA)	4
PHILL-P30	5
PHILL-P36	6
PHILL - ACCESSORIES	7
PHILL SPARE PARTS	8-9-10-11
VEHICLE REFUELLING APPLIANCES (VRA) - SMALL Q	12
FMQ-2.0.....	13
FMQ-2-36.....	14
FMQ-2.5.....	15
SMALL Q - SPARE PARTS	16-17-18-19
VEHICLE REFUELLING APPLIANCES (VRA) - BIG Q	20
FMQ-8-36.....	21
FMQ-10.....	22
BIG Q - SPARE PARTS	23-24

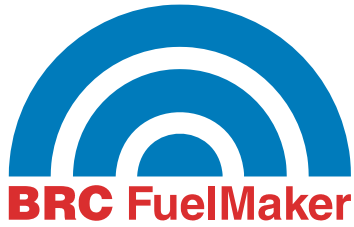


TABLE OF CONTENTS

	Page
FUELLING PANELS	25
AUXILIARY FUELLING PANEL (AFP).....	26
REMOTE FUELLING PANEL (RFP).....	27
FUELLING PANELS - ACCESSORIES	28
VRA - FILL HOSES AND NOZZLES	29
VRA - ACCESSORIES	29-30
DIAGNOSIS TOOLS	31
DISPLAY UNITS	31

HOME REFUELLING APPLIANCES (HRA)

PHILL



PHILL-P30



Specifications

Gas

Flow Rate: 1.5 m³/hr @ 21° C
 Maximum Discharge Pressure:.. 207 bar @ 21° C
 Minimum Inlet Pressure: 17 millibar
 Maximum Inlet Pressure: 35 millibar

Electrical

Electrical Supply:230 Volt AC, Single Phase, 50 Hz
 Circuit Ampacity:15 Amps
 Full Load Amperage:4 Amps
 Average Power Consumption Over Typical Fill Cycle:
 0.8 KWh
 Classification:General Purpose

Mechanical

Dimensions HxWxD:.. 762mmx356mmx330mm
 Unit Weight: 43.2 Kg
 Shipping Weight:..... 50 Kg
 Ambient Temperature Rating:.....-40° C to +46° C
 Noise Level: 40 dBA @ 5 m

Model Number	Description
E77HRAG15P3000	<p>PHILL-P30 (1.5 m³/h - 207 bar) Complete with mounting brackets and power cord. Includes hose, straight nozzle and cooling air inlet/outlet assemblies.</p>
E77HRAG15P3001	<p>PHILL-P30 (1.5 m³/h - 207 bar) Complete with mounting brackets and power cord. Includes hose, 90° elbow nozzle and cooling air inlet/outlet assemblies.</p>

PHILL-P36

Specifications



Gas

Flow Rate:0.8 SCFM @ 70° F
 Maximum Discharge Pressure:3,600 psig @ 70° F
 Minimum Inlet Pressure: 7" w.c (0.25 psig)
 Maximum Inlet Pressure: 14" w.c. (0.5 psig)

Electrical



Electrical Supply:240 Volt AC, Single Phase, 60 Hz
 Circuit Ampacity:15 Amps
 Full Load Amperage:5.0 Amps
 Average Power Consumption Over Typical Fill Cycle:
 0.83 KWh
 Classification:General Purpose

Mechanical







Dimensions HxWxD: 30"x14"x13"
 Unit Weight: 100 lbs
 Shipping Weight:..... 100 lbs
 Ambient Temperature Rating:-40° F to +115° F
 Noise Level: 40 dBA @ 16.5 ft

Model Number	Description
E77HRAG15P3600	PHILL-P36 (0.8 SCFM - 3,600 psig) Complete with mounting brackets and power cord. Includes Hose, Straight Nozzle and Cooling Air Inlet/Outlet Assemblies.
E77HRAG15P3601	PHILL-P36 (0.8 SCFM - 3,600 psig) Complete with mounting brackets and power cord. Includes Hose, 90° Elbow Nozzle and Cooling Air Inlet/Outlet Assemblies.






PHILL - ACCESSORIES

Model Number	Description
PR770347	Remote Gas Sensor HRA Gen 1.5
	Complete with sensor, housing and 30 ft interconnection cable. For use in indoor applications where the local jurisdiction requires a remote gas sensor.
PR770240	Depressurizing Tool
	Used to depressurize the hose assembly in the event of a drive away.







PHILL - SPARE PARTS

Model Number	Description
CD770375	P30 Compressor Side Fill Hose
	
CD770374	P36 Compressor Side Fill Hose
	
CD770373	P30 Car Side Straight Fill Hose
	
CD770372	P36 Car Side Straight Fill Hose
	
CD770393	P30 Car Side 90° Elbow Fill Hose
	
CD770392	P36 Car Side 90° Elbow Fill Hose
	








PHILL - SPARE PARTS


Model Number	Description
PR770048-1	Insulated Outdoor/Indoor Cooling Air Inlet/Outlet Assembly
	
PR770381	Internal Gas Sensor and Air Flow Switch Kit
	
PR770379S	Control Board Kit
	
DE536106	Power Supply Cable
	
PR770010S	Cooling Fan Kit
	
PR770011S	Internal Dryer
	

PHILL - SPARE PARTS

Model Number	Description
PR770426S	Mounting Brackets (rigid Brackets)
	
PR770003	Mounting Brackets (anti vibration Brackets)
	
PR770350	Mounting Brackets (Holding Brackets Kit)
	
PL77F0410	Straight Nozzle Holder
	
PR770298	90° Elbow Nozzle Holder
	
PR770397S	Low Pressure Sensor Kit
	

PHILL - SPARE PARTS


Model Number	Description
PR770413S	Brand New Electronic Module of Phill P30/P36
	
PR770005S	Brand New Control Module of Phill P30/P36
	
PR770006S	Brand New Motor Module of Phill P30/P36
	
PR770321S	Brand New Compression Module of Phill-P30
	
PR770007S	Brand New Compression Module of Phill-P36
	
PR770434S	Complete Module HRA P30 (Dryer not included)
	
PR770435S	Complete Module HRA P36 (Dryer not included)
	

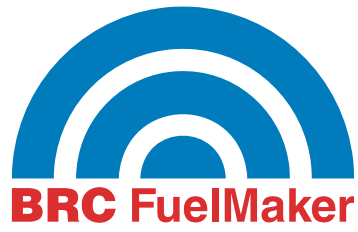

VEHICLE REFUELLING APPLIANCES (VRA)

SMALL Q



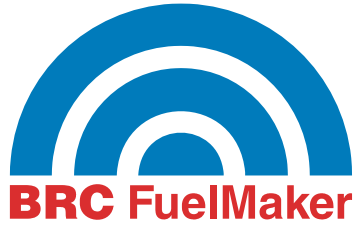

FMQ-2.0

Specifications



Gas

Flow Rate: 3.4 m³/hr @ 20°C @ 1.7 kPa (60 Hz)
 3.0 m³/hr @ 20°C @ 1.7 kPa (50 Hz)

Maximum Discharge Pressure: 20.7 MPa @ 20° C
 Minimum Inlet Pressure: 1.7 kPa
 Maximum Inlet Pressure: 14 kPa


Electrical

Electrical Supply: 240 Volts AC, Single Phase, 60 Hz
 or 220 Volts AC, Single Phase, 50 Hz
 Circuit Ampacity: 15 Amps
 Full Load Amperage: 7.0 / 6.5 Amps (60 / 50 Hz)
 Avg. Power Consumption Over Typical Fill Cycle: 0.9 to 1.2 kWh
 Classification: General Purpose






Mechanical

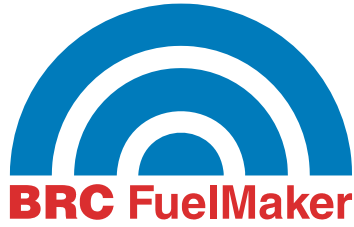
Dimensions L x W x H: 540 x 500 x 990 mm
 Unit Weight: 66 kg
 Shipping Weight: 68 kg
 Ambient Temperature Rating: -40° C to +45° C
 Noise Level: 49 dBA @ 5 m
 Service Interval: 4,000 Hours

Model Number	Description
E77Q02030001	FMQ-2.0 (4.25 m ³ /hr – 20.7 MPa @ 60 Hz) (3.4 m ³ /hr – 20.7 MPa @ 50 Hz) Complete with housing, junction box, fan assembly, electronics module, compression module, dual breakaway and lock assy. NO FILL HOSES INCLUDED
E77Q02030002	FMQ-2.0 (4.25 m ³ /hr – 20.7 MPa @ 60 Hz) (3.4 m ³ /hr – 20.7 MPa @ 50 Hz) Complete with housing, junction box, fan assembly, electronic module, compression module, 1/8" remote fill adapter outlet assy and lock assy.
E77Q02030003	FMQ-2.0 (4.25 m ³ /hr – 20.7 MPa @ 60 Hz) (3.4 m ³ /hr – 20.7 MPa @ 50 Hz) Complete with housing, junction box, fan assembly, electronics module, compression module, 1/4" remote fill adapter outlet assy, pressure start and lock assy.







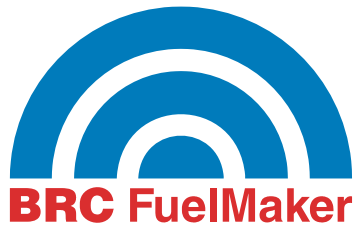


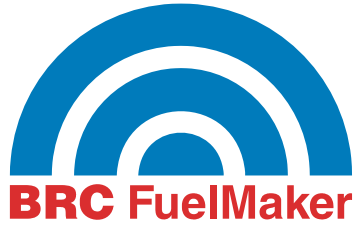
SMALL Q - SPARE PARTS

Model Number	Description
PR770402S	Electronic Module FMQ-2.0/2.5
	
PR770403S	Electronic Module FMQ-2-36
	
PR770313S	Compression Module FMQ-2.0
	
PR770304S	Compression Module FMQ-2.5
	
PR770067S	Compression Module FMQ-2-36
	
PR770113S	Control Module FMQ-2.0/2.5
	
PR770123S	Control Module FMQ-2-36
	










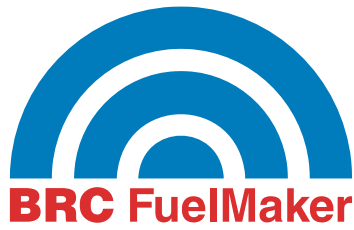
SMALL Q - SPARE PARTS

Model Number	Description
PR770110 	Double Breakaway Kit P30
PR770133 	Double Breakaway Kit P36
PR770151 	1/4" Remote Fill Adapter Outlet Assy Kit
PR770150 	1/8" Remote Fill Adapter Outlet Assy Kit
PR770161 	Lock Assy
PR770428S 	Cooling Fan Kit FMQ-2.0/2.5
TA77F0128 	Control Board Kit






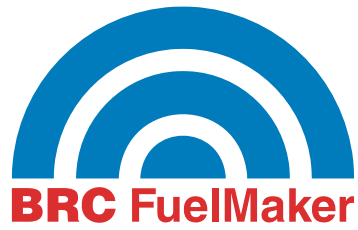
SMALL Q - SPARE PARTS

Model Number	Description
PR770225	Pressure Start FMQ-2.0/2-36/2.5
	
PR770432S	High Pressure Connector
	
PR770433S	Housing Kit FMQ-2.0/2.5
	
PL77F0105	Upper Cover Bar
	
PL77F0094V	Upper Cover
	
PL77F0102	Upper Cover Pin
	
PL77F0101	Upper Case Pivot Pin
	



SMALL Q - SPARE PARTS

Model Number	Description
PL77F0103	Compressor Foot
	
PL77F0097V	Back Grill
	
PL77F0095V	Front Grill
	



VEHICLE REFUELLING APPLIANCES (VRA)


BIG Q






BIG-Q - SPARE PARTS

Model Number	Description
PR770429S	Electronic Module FMQ-7-42
	
PR770400S	Electronic Module FMQ-8-36
	
PR770399S	Electronic Module FMQ-10
	
PR770423S	Compression Module FMQ-7-42
	
PR770067S	Compresion Module FMQ-8-36
	
PR770304S	Compression Module FMQ-10
	
PR770420S	Control Module FMQ-7-42
	

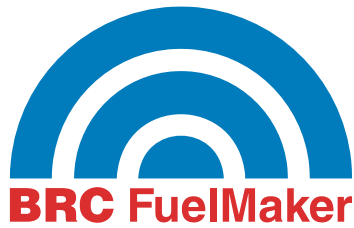


BIG-Q - SPARE PARTS

Model Number	Description
PR770065S	Control Module FMQ-8-36
	
PR770339S	Control Module FMQ-10
	
PR770061S	Motor Module FMQ-7-42/8-36/10
	
PR770062-1	Cooling Fan Kit FMQ-8-36/10
	
PR770226	Pressure Start FMQ-8-36/10
	
DE536020	High Pressure Sensor Cable for FMQ-7-42
	
PR770100	1/8" Remote Fill Adapter Outlet Assy Kit
	

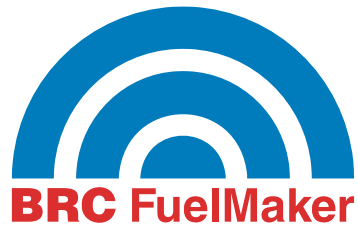

FUELLING PANELS



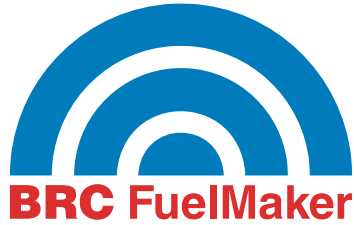

AUXILIARY FUELLING PANEL (AFP)



Specifications


Gas

Maximum Flow Rate: 85 m³ / hr
 Maximum Discharge Pressure: 24.8 MPa
 Maximum Inlet Pressure: 24.8 MPa

Mechanical

Dimensions L x W x H: 279 x 203 x 311 mm
 Unit Weight: 8 kg
 Shipping Weight: 9 kg
 Ambient Temperature Rating: -40° C to +45° C

Model Number	Description
E77AFPP30000	<p>Auxiliary Fuelling Panel (P30)</p> <p>Complete with weatherproof housing and door latch assembly.</p> <p>Note: Includes 1/4" inlet fitting, dual breakaway, vent valve assembly and lock assy. Does not include hoses, nozzle and nozzle vent valve.</p>
E77AFPP30001	<p>Auxiliary Fuelling Panel (P30)</p> <p>Complete with weatherproof housing and door latch assembly.</p> <p>Note: Includes 1/4" inlet fitting, dual breakaway, vent valve assembly, storage valve and lock assy. Does not include hoses, nozzle and nozzle vent valve. SUITABLE FOR INSTALLATIONS WITH STORAGE</p>
E77AFPP36000	<p>Auxiliary Fuelling Panel (P36)</p> <p>Complete with weatherproof housing and door latch assembly.</p> <p>Note: Includes 1/4" inlet fitting, dual breakaway, vent valve assembly and lock assy. Does not include hoses, nozzle and nozzle vent valve.</p>

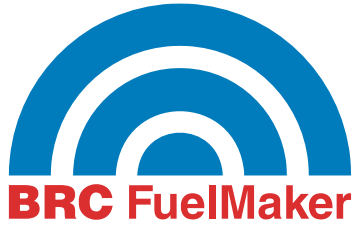

REMOTE FUELLING PANEL (RFP)



Specifications

Gas

Maximum Flow Rate: 85 m³ / hr
 Maximum Discharge Pressure: 24.38 MPa
 Maximum Inlet Pressure: 24.8 MPa


Electrical

Classification: General Purpose





Mechanical

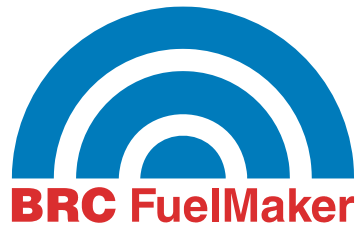Dimensions L x W x H: 279 x 203 x 311 mm
 Unit Weight: 10 kg
 Shipping Weight: 11 kg
 Ambient Temperature Rating: -40° C to +45° C

Model Number	Description
E77REMP30000	<p>Remote Fuelling Panel (P30) Complete with weatherproof housing, lock assembly and user panel.</p> <p>Note: Includes 1/8" inlet fitting, double breakaway and remote fuelling panel interface cable (30 m/100 ft). Does not include hoses and nozzle.</p>
E77REMP30001	<p>Remote Fuelling Panel (P30) Complete with weatherproof housing, lock assembly and user panel.</p> <p>Note: Includes 1/4" inlet fitting, double breakaway and remote fuelling panel interface cable (30 m/100 ft). Does not include hoses and nozzle.</p>
E77REMP36000	<p>Remote Fuelling Panel (P36) Complete with weatherproof housing, lock assembly and user panel.</p> <p>Note: Includes 1/8" inlet fitting, double breakaway and remote fuelling panel interface cable (30 m/100 ft). Does not include hoses and nozzle.</p>




FUELLING PANELS ACCESSORIES

Model Number	Description
PR770177	Post Mounting Kit for Fuelling Panels
	
DE536001	Remote Panel Cable 10m / 30 ft
	
DE536005	Remote Panel Cable 15m / 50 ft
	
DE536002	Remote Panel Cable 30m / 100ft
	







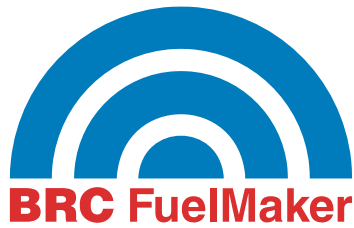

VRA - FILL HOSES AND NOZZLES

Model Number	Description
CD770384M	Fill Hose - Straight (F) fitting - length 10 ft (3 m) + Nozzle P30
CD770388M	Fill Hose - Straight (F) fitting - length 20 ft (6 m) + Nozzle P30
CD770394M	Fill Hose - Straight (F) fitting - length 25 ft (7.5 m) + Nozzle P30
CD770386M	Fill Hose - 90° Elbow (G) fitting - length 10 ft (3 m) + Nozzle P30
CD770390M	Fill Hose - 90° Elbow (G) fitting - length 20 ft (6 m) + Nozzle P30
CD770396M	Fill Hose - 90° Elbow (G) fitting - length 25 ft (7.5 m) + Nozzle P30
CD770384	Fill Hose - Straight (F) fitting - length 10 ft (3 m)
CD770388	Fill Hose - Straight (F) fitting - length 20 ft (6 m)
CD770394	Fill Hose - Straight (F) fitting - length 25 ft (7.5 m)
CD770386	Fill Hose - 90° Elbow (G) fitting - length 10 ft (3 m)
CD770390	Fill Hose - 90° Elbow (G) fitting - length 20 ft (6 m)
CD770396	Fill Hose - 90° Elbow (G) fitting - length 25 ft (7.5 m)
IX770042	Nozzle P30 (NGV 1 Approved)
CD770385M	Fill Hose (P36) - Straight (F) fitting - length 10 ft (3 m) + Nozzle P36
CD770389M	Fill Hose (P36) - Straight (F) fitting - length 20 ft (6 m) + Nozzle P36
CD770395M	Fill Hose (P36) - Straight (F) fitting - length 25 ft (7.5 m) + Nozzle P36
CD770387M	Fill Hose (P36) - 90° Elbow (G) fitting - length 10 ft (3 m) + Nozzle P36
CD770391M	Fill Hose (P36) - 90° Elbow (G) fitting - length 20 ft (6 m) + Nozzle P36
CD770397M	Fill Hose (P36) - 90° Elbow (G) fitting - length 25 ft (7.5 m) + Nozzle P36
CD770385	Fill Hose (P36) - Straight (F) fitting - length 10 ft (3 m)
CD770389	Fill Hose (P36) - Straight (F) fitting - length 20 ft (6 m)
CD770395	Fill Hose (P36) - Straight (F) fitting - length 25 ft (7.5 m)
CD770387	Fill Hose (P36) - 90° Elbow (G) fitting - length 10 ft (3 m)
CD770391	Fill Hose (P36) - 90° Elbow (G) fitting - length 20 ft (6 m)
CD770397	Fill Hose (P36) - 90° Elbow (G) fitting - length 25 ft (7.5 m)
OT770014	Nozzle P36 (NGV 1 Approved)



VRA - ACCESSORIES

Model Number	Description
PR770130	3-way Nozzle Vent Valve P30
	
PR770131	3-way Nozzle Vent Valve P36
	
CD770365	Dryer - High Capacity
	
CD770353	Dryer - Low Capacity
	
CD770383	Low Capacity Dryer Cartridge
	
PR770396	Protection Pole with Nozzle Holder
	





VRA - ACCESSORIES

Model Number	Description
PR770050-1	Handle Kit - Straight
PR770051-1	Handle Kit - 90° Elbow
CD770273	1/4" "T" Fitting
IX770095	1/4 Cap Fitting
IX770088	1/4" Shut Off Valve
CD770264	1/4" Union Coupling Fitting
CD770220	1/8" Union Coupling Fitting
PR770369	1/8" Tubing Assembly 1.5m (5ft)
PR770079-1	1/8" Tubing Assembly 3m (10ft)
PR770370	1/8" Tubing Assembly 4.5m (15ft)
PR770080-1	1/8" Tubing Assembly 6m (20ft)
MC770029	Lubricant Syntheso 270
PR770214	Fuse Kit

DIAGNOSIS TOOLS

Model	Description
TA770093	CD Software + Interface Cable The CD includes diagnosis software for HRA and VRA

DISPLAY UNITS

Model Number	Description
E77HRAG15DSPE 	Phill Display Unit with English Labels and Hose (functional nozzle)
E77SQDSPE 	Small Q Display Unit with English Labels and Hose (functional nozzle)