

MicroSmart FC6A PLC

Analog I/O Module Specifications



KEY FEATURES

- 8 modules to choose from
- Up to 16-bit resolution
- Fast sampling rate
- Wide range of signals:
 - 0/4-20mA, 0-10V DC, -10 to 10V DC, Type K, J, R, S, B, E, T, N, C thermocouple and RTD

SPECIFICATIONS

Analog I/O Module Specifications

Part Number	FC6A-J2C1	FC6A-J4A1	FC6A-J8A1	FC6A-L06A1	FC6A-L03CN1	FC6A-J4CN1	FC6A-J8CU1	FC6A-K4A1
Input Points	2	4	8	4	2	4	8	-
Input Signal Type	Voltage (0 to 10V) Current (0 to 20mA)	Voltage (-10 to +10V) Current (4 to 20mA)			Voltage (0 to 10V) Current (0 to 20mA) Thermocouple Resistance Thermometer	Voltage (-10 to +10V) Current (4 to 20mA)	Thermocouple Thermistor (NTC, PTC)	-
Output Points	-	-	-	2	1	-	-	4
Output Signal Style	-	-	-	Voltage (0 to 10V) Current (0 to 20mA)	Voltage (-10 to +10V) Current (4 to 20mA)	-	-	Voltage (0 to 10V) Voltage (-10 to +10V) Current (0 to 20mA) Current (4 to 20mA)
External Power Supply	Rated Power Voltage 24V DC, Allowable Voltage Range 20.4 to 28.8V DC							
External Current Draw (24V DC) ¹	25mA	30mA	40mA	100mA	80mA	40mA	30mA	125mA
Connector Insertion/ Removal Durability	100 times minimum							
Applicable Ferrule	1-wire: AI 0.5-10 (Phoenix Contact), 2-wire: AI-TWIN 2x0.5-10 (Phoenix Contact)							
Internal Power Consumption (5V DC)	40mA max.	45mA max.	40mA max.	55mA max.	55mA max.	50mA max.	45mA max.	50mA max.
Internal Power Consumption (at 24V DC while all I/Os are ON)	0.27W	0.30W	0.27W	0.37W	0.37W	0.34W	0.30W	0.34W
Weight (approx.)	115g	110g	110g	110g	115g	110g	110g	115g

Note 1: The external current draw is the value when all the analog inputs are used and the analog output value is at 100%.

Analog Input Specifications (1)

Part Number	FC6A-J2C1	FC6A-J4A1/FC6A-J8A1/FC6A-L06A1	
Input Signal Type	Voltage Input	Current Input	Voltage Input
Input Range	0 to 10V -10 to +10V	0 to 20mA 4 to 20mA	0 to 10V -10 to +10V
Input Impedance	1MΩ maximum	50Ω maximum	1MΩ maximum
Input Detection Current	-	-	-
	Sampling Duration Time	1ms	1ms or 10ms (selectable with application software)
	Sampling Repetition Time		Sampling time × valid input channels
AD Conversion	Total Input System Transfer Time		Sampling time + sampling interval + 1 scan time
	Type of Input		Single-ended input
	Operating Mode		Self-scan
	Conversion Method		ΣΔ type ADC
	Maximum Error at 25°C	±0.1% of full scale	±0.2% of full scale
Input Error	Cold Junction Compensation Error	-	-
	Temperature Coefficient	±0.006% of full scale/°C	±0.01% of full scale/°C
	Digital Resolution	65,536 increments (16 bits)	4,096 increments (12 bits)
Data	Input per Resolution	0 to 10V: 0.15mV -10 to +10V: 0.30mV	0 to 20mA: 0.30μA 4 to 20mA: 0.244μA
	Data Type in Application Program		Optional: -32,768 to 32,767 (selectable for each channel) ¹
	Monotonicity		Yes
	Input Data Out of Range		Detectable ²
	Input Filter		Soft filter (0 to 10 s, selectable in increments of 0.1 s)
Noise Resistance	Recommended Cable for Noise Immunity		Twisted pair shielded cable
	Crosstalk		1LSB maximum
Isolation			Between input and power circuit: Transformer-isolated Between input and internal circuit: Photocoupler-isolated
Effect of Improper Input Connection			No damage
Maximum Permanent Allowed Overload (No Damage)	13V DC	40mA	13V DC 40mA
Selection of Analog Input Signal Type			Using programming software
Calibration or Verification to Maintain Rated Accuracy			Not possible

Note 1: The data processed in the analog I/O module can be linear-converted to a value between -32,768 and 32,767. The optional range designation, and analog I/O data minimum and maximum values can be selected using data registers allocated to analog I/O modules.

Note 2: When an error is detected, a corresponding error code is stored to a data register allocated to analog I/O operating status.

Analog Input Specifications (2)

Part Number		FC6A-L03CN1/FC6A-J4CN1				FC6A-J8CU1		
Input Signal Type	Voltage Input	Current Input	Resistance Thermometer	Thermocouple	Thermocouple	NTC Thermistor	PTC Thermistor	
Input Range	0 to 10V DC -10 to +10V	0 to 20mA 4 to 20mA	Pt100, Pt1000 3-wire type (-200 to 850°C) Ni100, Ni1000 3-wire type (-60 to 180°C)	Type K (-200 to +1,300°C) Type J (-200 to +1,000°C) Type R (0 to 1,760°C) Type S (0 to 1,760°C) Type B (0 to 1,820°C) Type E (-200 to +800°C) Type T (-200 to +400°C) Type N (-200 to +1,300°C) Type C (0 to 2,315°C)	Type K (-200 to +1,300°C) Type J (-200 to +1,000°C) Type R (0 to 1,760°C) Type S (0 to 1,760°C) Type B (0 to 1,820°C) Type E (-200 to +800°C) Type T (-200 to +400°C) Type N (-200 to +1,300°C) Type C (0 to 2,315°C)	-90 to +150°C	100 to 10,000Ω	
Input Impedance	1 MΩ minimum	50Ω maximum	1 MΩ minimum	1 MΩ minimum	1 MΩ minimum	1 MΩ minimum	1 MΩ minimum	
Input Detection Current	—	—	0.1mA maximum	0.1mA maximum	0.1mA maximum	0.1mA maximum	0.1mA maximum	
Sampling Duration Time	10ms, 100ms or 104ms (selectable using application software)						104ms	
Sampling Repetition Time				Sampling time × valid input channels				
AD Conversion	Total Input System Transfer Time				Sampling time + sampling interval + 1 scan time			
Type of Input					Single-ended input			
Operating Mode					Self-scan			
Conversion Method					ΣΔ type ADC			
Input Error	Maximum Error at 25°C	±0.2% of full scale		FC6A-L03CN1: ±0.1% of full scale + cold junction compensation error FC6A-J4CN1: ±0.2% of full scale + cold junction compensation error ³		±0.2% of full scale + cold junction compensation error ³		
Cold Junction Compensation Error	—	—		±4°C maximum		±4°C maximum		
Temperature Coefficient			FC6A-L03CN1: 0.006%/°C of full scale FC6A-J4CN1: 0.01%/°C of full scale			0.01%/°C of full scale		
Digital Resolution	65,536 increments (16 bits)		Pt100: approx. 10,500 increments (14 bits) Pt1,000: approx. 8,000 increments (13 bits) Ni100: approx. 2,400 increments (12 bits) Ni1,000: approx. 2,400 increments (12 bits)	Type K: approx. 15,000 increments (14 bits) Type J: approx. 12,000 increments (14 bits) Type R: approx. 17,600 increments (15 bits) Type S: approx. 17,600 increments (15 bits) Type B: approx. 18,200 increments (15 bits) Type E: approx. 10,000 increments (14 bits) Type T: approx. 6,000 increments (13 bits) Type N: approx. 15,000 increments (14 bits) Type C: approx. 23,150 increments (15 bits)	Type K: approx. 15,000 increments (14 bits) Type J: approx. 12,000 increments (14 bits) Type R: approx. 17,600 increments (15 bits) Type S: approx. 17,600 increments (15 bits) Type B: approx. 18,200 increments (15 bits) Type E: approx. 10,000 increments (14 bits) Type T: approx. 6,000 increments (13 bits) Type N: approx. 15,000 increments (14 bits) Type C: approx. 23,150 increments (15 bits)		NTC: approx. 2,400 increments (12 bits) PTC: approx. 9,900 increments (14 bits)	
Data								
Input Value of LSB	0 to 10V: 0.15mV -10 to +10V: 0.30mV	0 to 20mA: 4 to 20mA: 0.244µA	0.1°C	0.1°C	0.1°C	0.1°C	1Ω	
Data Type in Application Program				Optional: selectable for each channel from -32,768 to 32,767 ¹				
Monotonicity				Yes				
Input Data Out of Range				Detectable ²				
Input Filter				Software				
Noise Resistance	Recommended Cable for Noise Immunity	Twisted pair shielded cable			Twisted pair cable			
Crosstalk					1 LSB maximum			
Isolation					Between input and power circuit: Transformer-isolated Between input and internal circuit: Photocoupler-isolated			
Effect of Improper Input Connection					No damage			
Maximum Permanent Allowed Overload (No Damage)					13V DC			
Selection of Input Signal Type and Input Range					40mA			
Calibration or Verification to Maintain Rated Accuracy				Using programming software				
					Not possible			

Note 1: The data processed in the analog I/O module can be linear-converted to a value between -32,768 and 32,767. The optional range designation, and analog I/O data minimum and maximum values can be selected using data registers allocated to analog I/O modules.

Note 2: When an error is detected, a corresponding error code is stored to a data register allocated to analog I/O operating status.


Note 3: R, S: ±8 (0 to 200°C) B: no compensation K, J, E, T, N: ±0.4% of full scale (0°C maximum)

Analog Output Specifications


Part Number	FC6A-K4A1	FC6A-L06A1	FC6A-L03CN1
Output Signal Style/Output Range	Voltage Current	0 to 10V DC -10 to +10V DC 0 to 20mA 4 to 20mA	0 to 10V DC -10 to +10V DC 0 to 20mA 4 to 20mA
Load	Impedance	Voltage output: 1 kΩ minimum Current output: 300Ω maximum	Voltage output: 1 kΩ minimum Current output: 300Ω maximum
DA Conversion	Load Type	Resistive load	Resistive load
	DA Conversion Time	1ms	1ms
	Output Update Interval	DA Conversion Time + Output Update Interval + 1 scan time	DA Conversion Time + Output Update Interval + 1 scan time
	Total Output System Transfer Time		
	Maximum Error at 25°C	±0.2% of full scale	±0.2% of full scale
	Temperature Coefficient	±0.01%/°C of full scale	±0.01%/°C of full scale
	Repeatability after Stabilization Time	±0.4% of full scale	±0.4% of full scale
Output Error	Output Voltage Drop	No damage	No damage
	Non-linearity	±0.2% of full scale	±0.2% of full scale
	Output Ripple	20mV maximum	20mV maximum
	Overshoot	0%	0%
	Total Error	±1% of full scale	±1% of full scale
	Digital Resolution	4,096 increments (12 bits)	4,096 increments (12 bits)
Data	Voltage	0 to 10V DC; 2.44mV -10 to +10V DC; 4.88mV	0 to 10V DC; 2.44mV -10 to +10V DC; 4.88mV
	Output Value of LSB	0 to 20mA; 4.88μA 4 to 20mA; 3.91μA	0 to 20mA; 4.88μA 4 to 20mA; 3.91μA
	Current		
	Data Type in Application Program	Optional -32,768 to 32,767 (selected for each channel)	
	Monotonicity	Yes	
	Current Loop Open	Undetectable	
Noise Resistance	Recommended Cable for Noise Immunity	Twisted pair shielded cable	
	Crosstalk	1LSB	
Isolation	Between output and power circuit	Transformer-isolated	
	Between output and internal circuit	Photocoupler-isolated	
	Effect of Improper Output Connection	No damage	
	Selection of Analog Output Signal Type	Using software programming	
	Calibration or Verification to Maintain Rated Accuracy	Impossible	

DIMENSIONS (all dimensions are in mm)


FC6A-N08B1/FC6A-N08A11/FC6A-R081
FC6A-T08K1/FC6A-T08P1/FC6A-M08BR1
FC6A-J2C1/FC6A-K4A1/FC6A-L03CN1

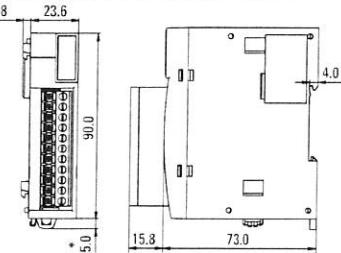


FC6A-N16B1/FC6A-R161
FC6A-T16K1/FC6A-T16P1
FC6A-J4A1/FC6A-J8A1
FC6A-J4CN1/FC6A-J8CU1
FC6A-L06A1

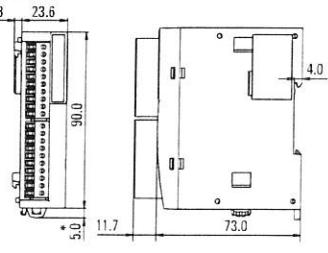

FC6A-N16B3/FC6A-T16K3
FC6A-T16P3

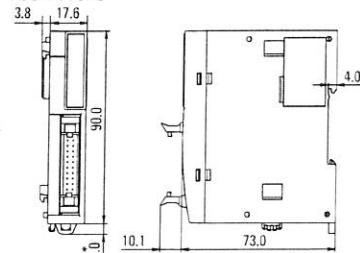

FC6A-N32B3/FC6A-T32K3
FC6A-T32P3

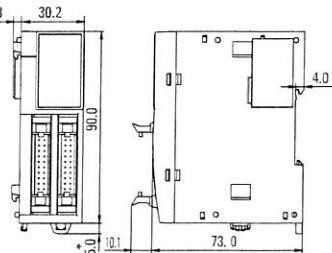



ONLINE CERTIFICATIONS DIRECTORY

NRAG7.E211795

Programmable Controllers for Use in Hazardous Locations Certified for Canada

[Page Bottom](#)**Programmable Controllers for Use in Hazardous Locations Certified for Canada**[See General Information for Programmable Controllers for Use in Hazardous Locations Certified for Canada](#)

IDEC CORP

E211795

6-64 NISHIMIYAHARA 2-CHOME
YODOGAWA-KU, OSAKA 532-0004 JAPAN

Class I, Division 2, Groups A, B, C and D.

Programmable controllers, CPU modules, "FT1A Series" Models FT1A-B12RA, -B12RC, -H12RA, -H12RC, -B24RA, -B24RC, -H24RA, -H24RC, -B40RKA, -B40RSA, -B40RC, -H40RKA, -H40RSA, -H40RC, -B48KA, -B48SA, -B48KC, -B48SC, -H48KA, -H48SA, -H48KC, -H48SC.**Open-type programmable controllers, LOGO**, Cat. Nos. FL1D-K2B2, FL1E-H12RCE, FL1E-H12SND, FL1B-M008B1S2, FL18-J2B2, FL1D-K2BM2, FL1E-RD1, FL1E-PM4, FL1E-PB1, FL1E-PG1.

Cat. Nos. FL1F-H12SCD, FL1F-H12RCE, FL1F-H12RCA, FL1F-H12RCC, FL1F-B12RCE, FL1F-B12RCA, FL1F-B12RCC, FL1F-M08B1S2, FL1F-M08B2R2, FL1F-M08D2R2, FL1F-M08C2R2, FL1F-J2B2, FL1F-K2BM2, FL1F-J2BR2, FL1F-RD1.

Programmable controllers, FC4A and FC5A Series, Base Modules: FC4A-C10R2, -C10R2C, -C16R2, -C24R2, -C24R2C, -D20K3, -D20S3; Base Modules: FC4A-D20RK1, -D20RS1, -D40K3, -D40S3, may be followed by -DS628; Base Modules: FC5A-C10R2, -C10R2C, -C10R2D, -C16R2, -C16R2C, -C16R2D, -C24R2, -C24R2C, -C24R2D, -D16RK1, -D16RS1, -D32K3, -D32S3, -D12K1E, -D12S1E; Expansion Modules: FC4A-R081, -R161, -T08K1, -T08S1, -T08SP1, -T16K3, -T16S3, -T16SP3, -T32K3, -T32S3, -T32SP3, -K4A1, -N08B1, -N16B1, -N16B3, -N32B3, -M08BR1, -M24BR2, -L03AP1, -L03A1, -J2A1, -K1A1, -N08A11, -J4CN1, -J8AT1, -K2C1; Expansion Interface Modules: FC5A-EXM1M, -EXM1S, -EXM2; Communication Modules: FC4A-HPC1, -HPC2, -HPC3, AS-I, FC5A-SIF2, FC5A-SIF4; Master Module: FC4A-AS62M; Web server units: FC4A-SX5ES1J, -SX5ES1E.**Programmable display operator Interface HG1F Series**, Base Modules: HG1F-SB22BF-B, -SB22BF-W, -SB22YF-B, -SB22YF-W.**Programmable display operator Interface HG2G Series**, Base Modules: HG2G-SS22VF-B, -SS22VF-W, -SS22VF-S, HG2G-SS22TF-B, -SS22TF-W, -SS22TF-S, HG2G-SB22VF-B, -SB22VF-W, -SB22VF-S, HG2G-SB22TF-B, -SB22TF-W, -SB22TF-S.**Programmable Display Operator Interfaces, HG3G Series**, Modules HG3G-8JT22TF-W, -8JT22TF-B, -8JT22MF-W, -8JT22MF-B, HG3G-AJT22TF-W, -AJT22TF-B, -AJT22MF-W, -AJT22MF-B.**Programmable display operator Interface modules**, Modules: HG2G-SS21VF-B, -SS21VF-W, -SS21VF-S, HG2G-SS21TF-B, -SS21TF-W, -SS21TF-S, HG2G-SB21VF-B, -SB21VF-W, -SB21VF-S, HG2G-SB21TF-B, -SB21TF-W, -SB21TF-S; HG4G Series modules HG4G-CJT22TF-B, and HG4G-CJT22MF-B, HG4G-CJT22TF-W, HG4G-CJT22MF-W, may be followed by -MK1495.**Programmable display operator Interface, HG2G Series**, Modules: HG2G-5ST22VF-W, -5ST22VF-B, -5ST22VF-S, HG2G-5ST22TF-W, -5ST22TF-B, -5ST22TF-S, HG2G-5FT22TF-W, -5FT22TF-B, -5FT22TF-S.**Programmable controllers, FT1A Series**, Models FT1A-C12RA-B, FT1A-C12RA-S, FT1A-C12RA-W, FT1A-M12RA-B, FT1A-M12RA-S and FT1A-M12RA-W, FT1A-M14SA-W, FT1A-M14SA-B, FT1A-M14SA-S, FT1A-M14KA-W, FT1A-M14KA-B, FT1A-M14KA-S, FT1A-C14SA-W, FT1A-C14SA-B, FT1A-C14SA-S, FT1A-C14KA-W, FT1A-C14KA-B, FT1A-C14KA-S.**Optional modules for programmable controller**, Models FT1A-M14SA-X, FT1A-M14KA-X, FT1A-C14SA-X and FT1AC14KA-X; FC6A-PJ2A: 2-Analog Input, FC6A-PJ2CP: 2-Analog Input, FC6A-PK2AV: 2-Analog Output, FC6A-PK2AW: 2-Analog Output.**Programmable controllers, FC6A Series - CPU Modules** : FC6A-M16R1, -M16R4, -M16R1E, -M16R4E, -M16P1, -M16P4, -M16P1E, -M16P4E, -M32P3, -M32P3E.**Programmable controllers, FC6A Series CPU Modules Brick Types** : FC6A-C16R1A, -C16R1AE, -C24R1A, -C24R1AE, -C40R1A, -C40R1AE, -C16P1C, -C16P1CE, -C24P1C, -C24P1CE, -C40P1C, -C40P1CE, -C16K1C, -C16K1CE, -C24K1C, -C24K1CE, -C40K1C, -C40K1CE.**Programmable controllers, FC6A Series - Input Modules** : FC6A-N08B1, -N08B4, -N16B1, -N16B4, -N16B3, -N32B3, -N08A11 -N08A14.**Programmable controllers, FC6A Series - Output Modules** : FC6A-R081, -R084, -R161, -R164, -T08P1, -T08P4, -T16P1, -T16P4, -T16P3, -T32P3, -T08K1, -T08K4, -T16K1, -T16K4, -T16K3, -T32K3.**Programmable controllers, FC6A Series - I/O Mixture Modules** : FC6A-M08BR1, -M08BR4, -M24BR1, -M24BR4, -TYS4.**Programmable controllers, FC6A Series - Analog Modules** : FC6A-J2C1, -J2C4, -J4A1, -J4A4, -J8A1, -J8A4, -K2A1, -K2A4, -K4A1, -K4A4, -L06A1, -L06A4, -L03CN1, -L03CN4, -J4CN1, -J4CN4, -JBCU1, -J8CU4, -F2MR1, -F2MR4, -F2M1, -F2M4.**Programmable controllers, FC6A Series - Option Modules** : FC6A-PJ2A, -PJ2CP, -PK2AV, -PK2AW, -PC1, -PC2.

Programmable display operator Interface, HG2G Series, Models HG2G-5Txx2Tx-W, HG2G-5Txx2Tx-B, HG2G-5Txx2Tx-S, where xx equals N22, T22 or U72.



Last Updated on 2015-12-01

[Questions?](#)

[Print this page](#)

[Terms of Use](#)

[Page Top](#)

© 2016 UL LLC

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2016 UL LLC".