


# Introducing Our Newest Generation Of Dispensers, The TGT Series T7000

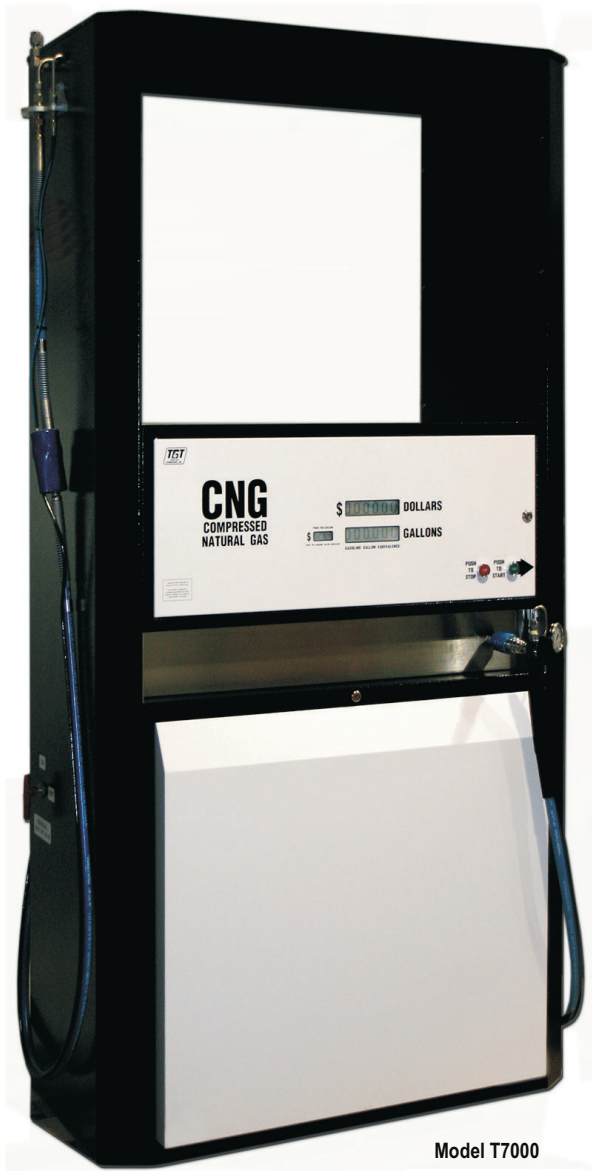

Model T7000

TGT's New Model T7000 Features:

- ★ Compatibility with World Wide Voltages
- ★ Intrinsically Safe Design
- ★ Class 1 Div. 1
- ★ In Dispenser Sequencing
- ★ Temperature Compensation of Gas Pressure
- ★ Light Duty Design 1500 cfm Flow Rate
- ★ Transit Bus Design 3500 cfm Flow Rate
- ★ Dual Hose and Single Hose Designs
- ★ Local Access Key Pad for Control of Dispenser
- ★ RS 232 Laptop Interface
- ★ On Board Card Reader
- ★ Micro Motion® Mass Flow Meters

PRESSURE	FLOWRATE	QUANTITY	AMB TEMP
+3258	0648	009.381	+076
DELIVERY	BANK-2	BANK-3	END CODE
ON	ON	OFF	STOP SWITCH

Easy-to-Read Full Control Alphanumeric Display

Choose Tulsa Gas Technologies to supply your NGV Dispenser needs.



**TULSA GAS TECHNOLOGIES**

4809 South 101 East Avenue • Tulsa, Oklahoma 74146

(918) 665-2641 • FAX: (918) 665-2657 • [www.tulsagastech.com](http://www.tulsagastech.com)

**MADE IN  
THE U.S.A.**

## FEATURES:

- *In-dispenser Card Reader available*
- *Quick order turnaround*
- *Easy-to-read "back-lit" liquid crystal displays*
- *Battery backup display, with all totals in non-volatile memory*
- *Volume displays in gallon or liter equivalents, cubic feet, cubic meters, or mass pounds*
- *Powder-coated steel body (stainless steel optional)*
- *Display of total sale, unit price and totalizers*
- *Hose retractor*
- *Easy-to-read full control alphanumeric display*
- *Single or twin hose and dual pressure models*
- *Micro Motion® Mass Flow Meter\*, CNG50, DH100*
- *Fill and vent hoses with safety breakaway couplings*
- *Interfaces with all common card readers*
- *"At pump" price setting and totalizer displays*
- *Automatic shut-down on pulser fault*
- *Custom paint on cabinets available*
- *Output pulses 10, 100 or 1000 ppu*
- *In-Line hose breakaway*
- *ANSI/IAS NGV 4.2 - 1999 listed hoses*

**MADE IN  
THE U.S.A.**

\* Micro Motion® is a trademark of Micro Motion Corporation, Boulder, Colorado

## SPECIFICATIONS:

- *Sales display to 6 digits on a .75" back-lit LCD*
- *Prices display to 4 digits on a .5" back-lit LCD*
- *Non-resettable volume totalizer*
- *Battery powers displays for 15 minutes and backs up total to memory*
- *3000/3600 psi operating pressure*
- *5000 psVAC/50Hz*
- *Class 1, Div 1, Group D, Zone 1, MAWP*
- *Fail-safe valve design*
- *Operating temperature range -40° to +60° C*
- *Electrical requirement: 120VAC/60Hz or 250*

