

CERTIFICATE OF CONFORMANCE
FOR
MATERIALS SHIPPED

Tulsa Gas Technologies, Inc. (TGT) hereby certifies that all materials in the manufacture of hoses for W/O # TRIL092524 conform to the manufacturing specifications indicated in drawings, bulletins or specifications as called for on the said purchase order. Test reports are on file with us or with our suppliers for examination and indicate conformance with applicable specification requirements. In production items listed, no direct contact was made with mercury, any of its compounds or with any mercury containing devices employing a single boundary for containment. Tulsa Gas Technologies, Inc. also certifies that the parts listed and shipped on the date indicated are manufactured in accordance with Parker specifications and quality standards, if applicable, as stated on the drawings or specifications called for on said purchase order. All parts and test conform to AGA I-93.

SIGNED BY: Patrick McElheney
TITLE: Hose Builder
DATE: 6-3-25

Tulsa Gas Technologies, Inc.
4309 S. 101st. E. Ave.
Tulsa, OK 74146
918-665-2641

Work Order #
Customer Name
Customer PO
Date Required

TRJL092524
Trillium Transportation Fuels
4500151594
9-25-24

ASSEMBLY/CERTIFICATION SHEET

		SIGN	DATE						
1	☒ Review shop work order versus customer print and history	PM	6-3-25						
2	☒ Component part numbers: <u>106CG-12-12, 106CG-12-12</u> Pack dates and/or QC codes	PM	6-3-25						
3	☒ ID band number	PM	6-3-25						
4	☒ Hose Out Length <u>144"</u>	PM	6-3-25						
5	Pre-expansion of hose (if required) Size Remarks:	PM	6-3-25						
6	☒ Audit and mark appropriate insertion depth	PM	6-3-25						
7	Add special accessories Remarks:	PM	6-3-25						
8	☒ Apply danger tag and ID band	PM	6-3-25						
9	☒ Install bend restrictors Remarks:	PM	6-3-25						
10	☒ Assemble fittings; check insertion depth Remarks:	PM	6-3-25						
11	Set offset angle and/or orientation Remarks:	PM	6-3-25						
12	☒ Perform crimp or swage on product crimp set die using Parker Catalog 4660, page K58 <table border="0"><tr><td><u>1/2</u>) 80C-PO8H</td><td><u>3/8</u>) 80C-PO6H</td></tr><tr><td><u>1/4</u>) 80C-PO4H</td><td><u>1/8</u>) 80C-PO2</td></tr><tr><td><u>3/8</u>) 80C-PO6</td><td><u>3/4</u>) 80C-P12H</td></tr></table>	<u>1/2</u>) 80C-PO8H	<u>3/8</u>) 80C-PO6H	<u>1/4</u>) 80C-PO4H	<u>1/8</u>) 80C-PO2	<u>3/8</u>) 80C-PO6	<u>3/4</u>) 80C-P12H	PM	6-3-25
<u>1/2</u>) 80C-PO8H	<u>3/8</u>) 80C-PO6H								
<u>1/4</u>) 80C-PO4H	<u>1/8</u>) 80C-PO2								
<u>3/8</u>) 80C-PO6	<u>3/4</u>) 80C-P12H								
13	Add special accessories after crimping/swaging								
14	Perform and record burst test results if applicable Remarks:								
15	Air test, if applicable Test pressure Psi _____ Seconds _____ : Pass/Fail (Circle One) Remarks:								
16	☒ Hydrostatic proof test Test pressure Psi <u>10,000</u> Seconds <u>30</u> (Pass/Fail (Circle One)) Remarks:	PM	6-3-25						
17	☒ Flush method water, and then air	PM	6-3-25						
18	☒ Perform and record conductivity test; Meter <u>Megger MIT200</u> Hose resistance <u>0.02</u> (-) Electrode resistance <u>0.03</u> (=) Final hose resistance <u>0.03</u>	PM	6-3-25						
19	☒ Final audit: Check boxes for items inspected, as applicable: ☒ Correct hose; ☒ Correct fittings; ☒ Correct customer PN	PM	6-3-25						
20	☒ Check swage or crimp diameters: <table border="0"><tr><td><u>5CNG-4-58 .668/.688</u></td><td><u>5CNG-8-58 .900/.920</u></td></tr><tr><td><u>5CNG-6-58 .785/.805</u></td><td><u>5CNG-12-58 1.20/1.22</u></td></tr><tr><td><u>5CNG-6-55 .675/.695</u></td><td></td></tr></table>	<u>5CNG-4-58 .668/.688</u>	<u>5CNG-8-58 .900/.920</u>	<u>5CNG-6-58 .785/.805</u>	<u>5CNG-12-58 1.20/1.22</u>	<u>5CNG-6-55 .675/.695</u>		PM	6-3-25
<u>5CNG-4-58 .668/.688</u>	<u>5CNG-8-58 .900/.920</u>								
<u>5CNG-6-58 .785/.805</u>	<u>5CNG-12-58 1.20/1.22</u>								
<u>5CNG-6-55 .675/.695</u>									
21	☒ Hose fittings crimped; ☒ Air passes through assembly: ☒ Presence of threads	PM	6-3-25						
20	☒ Cap and package hose	PM	6-3-25						
21	☒ Certificate of Conformance for Materials Shipped (on back)	PM	6-3-25						

3

FITTING TYPE

01 NPT MALE

02 NPT FEMALE

03 JIC MALE

04 SAE 45 MALE

05 SAE O-RING STRAIGHT THREAD

06 JIC FEMALE SWIVEL

07 FEMALE PIPE SWIVEL

7

FITTING SIZE

4 1/4"

6 3/8"

8 1/2"

10 5/8"

12 3/4"

1

CG SERIES

HOSE SIZE

4 1/4"

6 3/8"

8 1/2"

12 3/4"

4

FITTING TYPE

01 NPT MALE

02 NPT FEMALE

03 JIC MALE

04 SAE 45 MALE

05 SAE O-RING STRAIGHT THREAD

06 JIC FEMALE SWIVEL

07 FEMALE PIPE SWIVEL

8

FITTING SIZE

4 1/4"

6 3/8"

8 1/2"


10 5/8"

12 3/4"

BREAK-AWAY OR
DISPENSER END

11 FILL HOSE LENGTH

FILL END

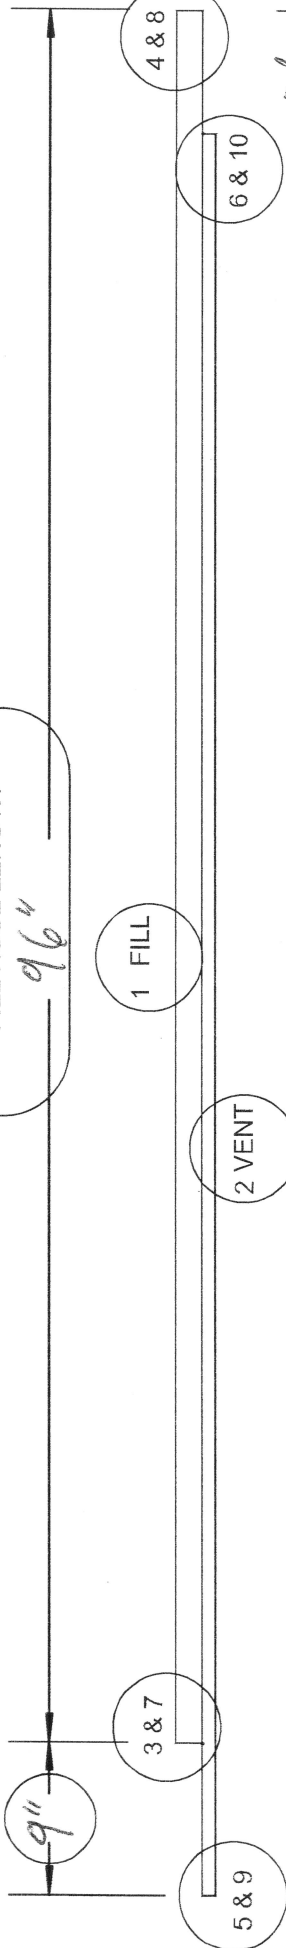

SHEREX CT1000 use 1/4" VENT ONLY 5/8"
SHEREX CT5000 use 3/8" VENT ONLY

5

FITTING TYPE

01 NPT MALE

02 NPT FEMALE

03 JIC MALE

04 SAE 45 MALE

05 SAE O-RING STRAIGHT THREAD

06 JIC FEMALE SWIVEL

07 FEMALE PIPE SWIVEL

9

FITTING SIZE

2 1/8"

4 1/4"

6 3/8"

2

CG SERIES

HOSE SIZE

4 1/4"

6 3/8"

6

FITTING TYPE

01 NPT MALE

02 NPT FEMALE

03 JIC MALE

04 SAE 45 MALE

05 SAE O-RING STRAIGHT THREAD

06 JIC FEMALE SWIVEL

07 FEMALE PIPE SWIVEL

10

FITTING SIZE

2 1/8"

4 1/4"

6 3/8"

WORK ORDER #TRIL092524

5CNG12/5CNG12-0606/0506-1212/66-96"

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

Tulsa Gas Technologies, Inc.
4309 S. 101st. E. Ave.
Tulsa, OK 74146
918-665-2641

Work Order #
Customer Name
Customer PO
Date Required

TRIL092524
Trillium Transportation Fuels
4500151594
9-25-24

ASSEMBLY/CERTIFICATION SHEET

		SIGN	DATE						
1	☒ Review shop work order versus customer print and history	PM	6-3-25						
2	☒ Component part numbers: <u>106CG-12-12, 106CG-12-12</u> Pack dates and/or QC codes	PM	6-3-25						
3	☒ ID band number	PM	6-3-25						
4	☒ Hose Out Length <u>36"</u>	PM	6-3-25						
5	☐ Pre-expansion of hose (if required) Size Remarks:	PM	6-3-25						
6	☒ Audit and mark appropriate insertion depth	PM	6-3-25						
7	☐ Add special accessories Remarks:	PM	6-3-25						
8	☒ Apply danger tag and ID band	PM	6-3-25						
9	☒ Install bend restrictors Remarks:	PM	6-3-25						
10	☒ Assemble fittings; check insertion depth Remarks:	PM	6-3-25						
11	☐ Set offset angle and/or orientation Remarks:	PM	6-3-25						
12	☒ Perform crimp or swage on product crimp set die-using Parker Catalog 4860, page K58 <table border="0"><tr><td>☐ 1/2) 80C-PO6H</td><td>☐ 3/8) 80C-PO6H</td></tr><tr><td>☐ 1/4) 80C-PO4H</td><td>☐ 1/8) 80C-PO2</td></tr><tr><td>☐ 3/8) 80C-PO6</td><td>☒ 3/4) 80C-P12H</td></tr></table>	☐ 1/2) 80C-PO6H	☐ 3/8) 80C-PO6H	☐ 1/4) 80C-PO4H	☐ 1/8) 80C-PO2	☐ 3/8) 80C-PO6	☒ 3/4) 80C-P12H	PM	6-3-25
☐ 1/2) 80C-PO6H	☐ 3/8) 80C-PO6H								
☐ 1/4) 80C-PO4H	☐ 1/8) 80C-PO2								
☐ 3/8) 80C-PO6	☒ 3/4) 80C-P12H								
13	☐ Add special accessories after crimping/swaging								
14	☐ Perform and record burst test results, if applicable Remarks:								
15	☐ Air test, if applicable Test pressure Psi _____ Seconds _____ : Pass/Fail (Circle One) Remarks:								
16	☒ Hydrostatic proof test Test pressure Psi <u>10,000</u> Seconds <u>30</u> (Pass/Fail (Circle One)) Remarks:	PM	6-3-25						
17	☒ Flush method water, and then air	PM	6-3-25						
18	☒ Perform and record conductivity test: Meter <u>Megger MIT200</u> Hose resistance <u>0.00</u> (-) Electrode resistance <u>0.03</u> (=) Final hose resistance <u>0.03</u>	PM	6-3-25						
19	☒ Final audit: Check boxes for items inspected, as applicable: ☒ Correct hose; ☒ Correct fittings; ☒ Correct customer P/N	PM	6-3-25						
20	☒ Check swage or crimp diameters: <table border="0"><tr><td>☐ 5CNG-4-58 .668/.688</td><td>☐ 5CNG-8-58 .900/.920</td></tr><tr><td>☐ 5CNG-6-58 .785/.805</td><td>☒ 5CNG-12-58 1.20/1.22</td></tr><tr><td>☐ 5CNG-6-53 .675/.695</td><td></td></tr></table>	☐ 5CNG-4-58 .668/.688	☐ 5CNG-8-58 .900/.920	☐ 5CNG-6-58 .785/.805	☒ 5CNG-12-58 1.20/1.22	☐ 5CNG-6-53 .675/.695		PM	6-3-25
☐ 5CNG-4-58 .668/.688	☐ 5CNG-8-58 .900/.920								
☐ 5CNG-6-58 .785/.805	☒ 5CNG-12-58 1.20/1.22								
☐ 5CNG-6-53 .675/.695									
***** 100% VISUAL INSPECT FOR THE FOLLOWING *****									
21	☒ Hose fittings crimped; ☒ Air passes through assembly: ☒ Presence of threads	PM	6-3-25						
20	☒ Cap and package nose	PM	6-3-25						
21	☒ Certificate of Conformance for Materials Shipped (on back)	PM	6-3-25						

3

FITTING TYPE

01 NPT MALE

02 NPT FEMALE

03 JIC MALE

04 SAE 45 MALE

05 SAE O-RING STRAIGHT THREAD

06 JIC FEMALE SWIVEL

07 FEMALE PIPE SWIVEL

7

FITTING SIZE

4 1/4"

6 3/8"

8 1/2"

10 5/8"

12 3/4"

1

CG SERIES

HOSE SIZE

4 1/4"

6 3/8"

8 1/2"

12 3/4"

4

FITTING TYPE

01 NPT MALE

02 NPT FEMALE

03 JIC MALE

04 SAE 45 MALE

05 SAE O-RING STRAIGHT THREAD

06 JIC FEMALE SWIVEL

07 FEMALE PIPE SWIVEL

8

FITTING SIZE

4 1/4"

6 3/8"

8 1/2"


10 5/8"

12 3/4"

BREAK-AWAY OR
DISPENSER END

11 FILL HOSE LENGTH
36"

FILL END

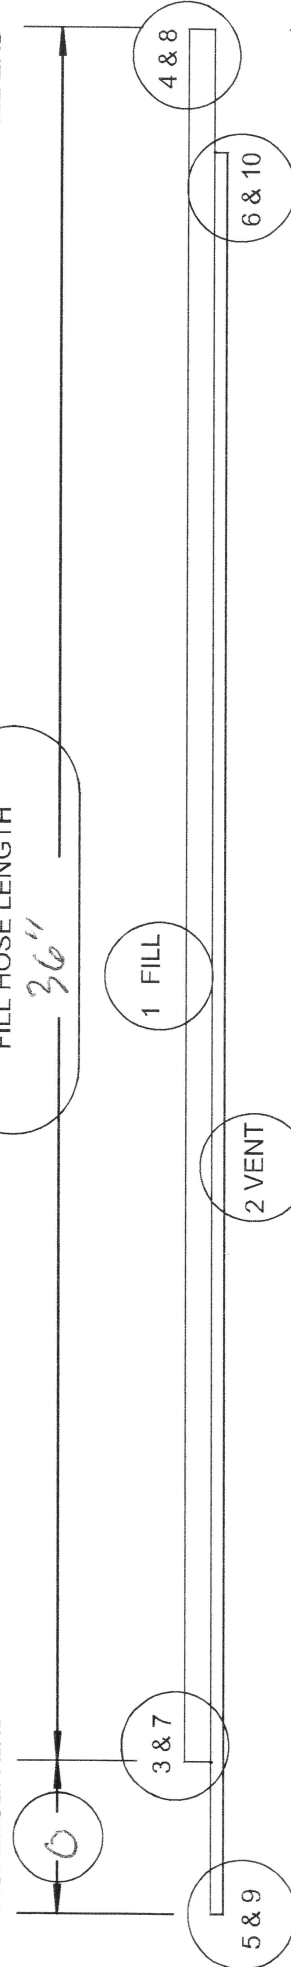

5

FITTING TYPE

01 NPT MALE

02 NPT FEMALE

03 JIC MALE

04 SAE 45 MALE

05 SAE O-RING STRAIGHT THREAD

06 JIC FEMALE SWIVEL

07 FEMALE PIPE SWIVEL

9

FITTING SIZE

2 1/8"

4 1/4"

6 3/8"

2

CG SERIES

HOSE SIZE

4 1/4"

6 3/8"

6

FITTING TYPE

01 NPT MALE

02 NPT FEMALE

03 JIC MALE

04 SAE 45 MALE

05 SAE O-RING STRAIGHT THREAD

06 JIC FEMALE SWIVEL

07 FEMALE PIPE SWIVEL

10

FITTING SIZE

2 1/8"

4 1/4"

6 3/8"

WORK ORDER #TRIL092524

5CNG 1 2 3 4 5 6 7 8 9 10 11
12/5CNG 12/06 06/05 06/12 06/36

FILL HOSE

DATE: 03/27/97

DESIGNED BY: C. SEWELL

DRAWN BY: G.R.S.

SCALE: NONE

TUE SA GAS TECHNOLOGIES, INC.
1017 EAST 40TH STREET
TULSA, OK 74106

918-465-2041 FAX: 918-465-2057

CHECKED BY:

SCALE: NONE