

CERTIFICATE OF CONFORMANCE
FOR
MATERIALS SHIPPED

Tulsa Gas Technologies, Inc. (TGT) hereby certifies that all materials in the manufacture of hoses for W/O # DWPC021425A conform to the manufacturing specifications indicated in drawings, bulletins or specifications as called for on the said purchase order. Test reports are on file with us or with our suppliers for examination and indicate conformance with applicable specification requirements. In production items listed, no direct contact was made with mercury, any of its compounds or with any mercury containing devices employing a single boundary for containment. Tulsa Gas Technologies, Inc. also certifies that the parts listed and shipped on the date indicated are manufactured in accordance with Parker specifications and quality standards, if applicable, as stated on the drawings or specifications called for on said purchase order. All parts and test conform to AGA I-93.

SIGNED BY: Patrick McElhenny
TITLE: Hose Builder
DATE: 7-30-25

Tulsa Gas Technologies, Inc.
4309 S. 101st. E. Ave.
Tulsa, OK 74146
918-665-2641

Work Order #
Customer Name
Customer PO
Date Required

JWPC021425A
JW Power CO.
P1361289
2-14-25

ASSEMBLY/CERTIFICATION SHEET

		SIGN	DATE		
1	☒ Review shop work order versus customer print and history	PM	7-30-25		
2	☒ Component part numbers: <u>106CG-8-8, 106CG-8-8</u> Pack dates and/or QC codes	PM	7-30-25		
3	☒ ID band number <u>5220508623</u>	PM	7-30-25		
4	☒ Hose Cut Length <u>96"</u>	PM	7-30-25		
5	☐ Pre-expansion of hose (if required) Size _____ Remarks: _____	PM	7-30-25		
6	☒ Audit and mark appropriate insertion depth	PM	7-30-25		
7	☐ Add special accessories _____ Remarks: _____				
8	☒ Apply danger tag and ID band	PM	7-30-25		
9	☒ Install bend restrictors _____ Remarks: _____	PM	7-30-25		
10	☒ Assemble fittings; check insertion depth _____ Remarks: _____	PM	7-30-25		
11	☐ Set offset angle and/or orientation _____ Remarks: _____				
12	☒ Perform crimp or swage on product crimp set die using Parker Catalog 4660, page K58 ☒ 1/2) 80C-PO8H 3/8) 80C-PO6H ☐ 1/4) 80C-PO4H 1/8) 80C-PO2 ☐ 3/8) 80C-PO6 3/4) 80C-P12H	PM	7-30-25		
13	☐ Add special accessories after crimping/swaging				
14	☐ Perform and record burst test results, if applicable Remarks: _____				
15	☐ Air test, if applicable Test pressure Psi _____ Seconds _____ (Pass/Fail (Circle One)) Remarks: _____				
16	☒ Hydrostatic proof test Test pressure Psi <u>10,000</u> Seconds <u>30</u> (<u>Pass</u> /Fail (Circle One)) Remarks: _____	PM	7-30-25		
17	☒ Flush method water, and then air	PM	7-30-25		
18	☒ Perform and record conductivity test: Meter _____ Megger Mit200 Hose resistance <u>0.02</u> (-) Electrode resistance <u>0.03</u> (=) Final hose resistance <u>0.03</u>	PM	7-30-25		
19	☒ Final audit: Check boxes for items inspected, as applicable: ☒ Correct hose; ☒ Correct fittings; ☒ Correct customer PN	PM	7-30-25		
20	☒ Check swage or crimp diameters: ☒ 5CNG-4-58 .668/.688 ☒ 5CNG-8-58 .900/.920 ☒ 5CNG-6-58 .785/.805 ☒ 5CNG-12-58 1.20/1.22	PM	7-30-25		
21	*****100% VISUAL INSPECT FOR THE FOLLOWING***** ☒ Hose fittings crimped; ☒ Air passes through assembly; ☒ Presence of threads			PM	7-30-25
20	☒ Cap and package nose	PM	7-30-25		
21	☒ Certificate of Conformance for Materials Shipped (on back)	PM	7-30-25		

Work Order #
Customer Name
Customer PO
Date Required

JWPC 021425A
JW Power Co.
D1361289
2-14-25

ASSEMBLY/CERTIFICATION SHEET

- | | | SIGN | DATE |
|----|---|------|---------|
| 1 | ☒ Review shop work order versus customer print and history | PM | 7-30-25 |
| 2 | ☒ Component part numbers: <u>106CG-8-8, 106CG-8-8</u> | | |
| | Pack dates and/or QC codes | | |
| 3 | ☒ ID band number <u>5220508622</u> | PM | 7-30-25 |
| 4 | ☒ Hose Cut Length <u>36"</u> | PM | 7-30-25 |
| 5 | Pre-expansion of hose (if required) Size _____ | PM | 7-30-25 |
| | Remarks: _____ | | |
| 6 | ☒ Audit and mark appropriate insertion depth | PM | 7-30-25 |
| 7 | Add special accessories _____ | | |
| | Remarks: _____ | | |
| 8 | ☒ Apply danger tag and ID band | PM | 7-30-25 |
| 9 | ☒ Install bend restrictors | PM | 7-30-25 |
| | Remarks: _____ | | |
| 10 | ☒ Assemble fittings; check insertion depth | PM | 7-30-25 |
| | Remarks: _____ | | |
| 11 | Set offset angle and/or orientation | PM | 7-30-25 |
| | Remarks: _____ | | |
| 12 | ☒ Perform crimp or swage on product crimp set die-using Parker Catalog 4660, page K58 | | |
| | ☒ 1/2) 80C-PO8H _____ 3/8) 80C-PO6H _____ | | |
| | 1/4) 80C-PO4H _____ 1/8) 80C-PO2 _____ | | |
| | 3/8) 80C-PO6 _____ 3/4) 80C-P12H _____ | PM | 7-30-25 |
| 13 | Add special accessories after crimping/swaging | | |
| 14 | Perform and record burst test results, if applicable | | |
| | Remarks: _____ | | |
| 15 | Air test, if applicable | | |
| | Test pressure Psi _____ Seconds _____ : Pass/Fail (Circle One) | | |
| | Remarks: _____ | | |
| 16 | ☒ Hydrostatic proof test | | |
| | Test pressure Psi <u>10,000</u> Seconds <u>30</u> (Pass/Fail (Circle One)) | | |
| | Remarks: _____ | | |
| 17 | ☒ Flush method water, and then air | PM | 7-30-25 |
| 18 | ☒ Perform and record conductivity test: Meter _____ Megger Mit200 | PM | 7-30-25 |
| | Hose resistance <u>0.00</u> (+) Electrode resistance <u>0.03</u> | | |
| | (-) Final hose resistance <u>0.03</u> | PM | 7-30-25 |
| 19 | ☒ Final audit: Check boxes for items inspected, as applicable: | | |
| | ☒ Correct hose; ☒ Correct fittings; ☒ Correct customer PN | PM | 7-30-25 |
| 20 | ☒ Check swage or crimp diameters: | | |
| | 5CNG-4-58 .668/.688 ☒ 5CNG-8-58 .900/.920 ☒ | PM | 7-30-25 |
| | 5CNG-6-58 .785/.805 ☒ 5CNG-12-58 1.20/1.22 ☒ | | |
| | 5CNG-6-55 .675/.695 ☒ | | |
| 21 | ☒ Hose fittings crimped; ☒ 100% VISUAL INSPECT FOR THE FOLLOWING | | |
| | ☒ Presence of threads ☒ Air passes through assembly; | PM | 7-30-25 |
| 20 | ☒ Cap and package hose | PM | 7-30-25 |
| 21 | ☒ Certificate of Conformance for Materials Shipped (on back) | PM | 7-30-25 |

3

FITTING TYPE

01 NPT MALE

02 NPT FEMALE

03 JIC MALE

04 SAE 45 MALE

05 SAE O-RING STRAIGHT THREAD

06 JIC FEMALE SWIVEL

07 FEMALE PIPE SWIVEL

7

FITTING SIZE

4 1/4"

6 3/8"

8 1/2"

12 3/4"

1

55 SERIES

HOSE SIZE

4 1/4"

6 3/8"

8 1/2"

12 3/4"

4

FITTING TYPE

01 NPT MALE

02 NPT FEMALE

03 JIC MALE

04 SAE 45 MALE

05 SAE O-RING STRAIGHT THREAD

06 JIC FEMALE SWIVEL

07 FEMALE PIPE SWIVEL

8

FITTING SIZE

4 1/4"

6 3/8"


8 1/2"

12 3/4"

BREAK-AWAY OR
DISPENSER END

11 FILL HOSE LENGTH
36"

FILL END

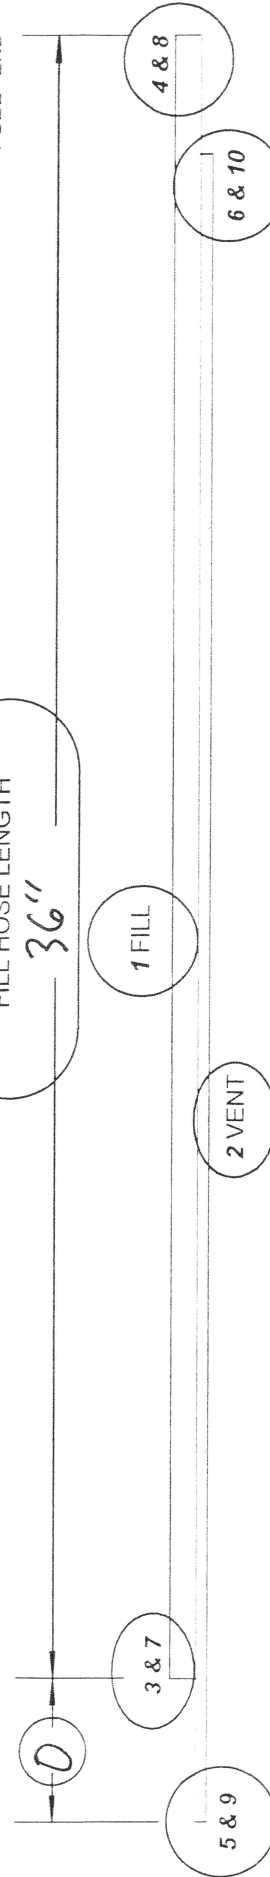

5

FITTING TYPE

01 NPT MALE

02 NPT FEMALE

03 JIC MALE

04 SAE 45 MALE

05 SAE O-RING STRAIGHT THREAD

06 JIC FEMALE SWIVEL

07 FEMALE PIPE SWIVEL

9

FITTING SIZE

2 1/8"

4 1/4"

6 3/8"

2

55 SERIES

HOSE SIZE

2 1/8"

4 1/4"

6 3/8"

6

FITTING TYPE

01 NPT MALE

02 NPT FEMALE

03 JIC MALE

04 SAE 45 MALE

05 SAE O-RING STRAIGHT THREAD

06 JIC FEMALE SWIVEL

07 FEMALE PIPE SWIVEL

10

FITTING SIZE

2 1/8"

4 1/4"

6 3/8"

STANDARD 3"
SHEREX 5/8"

WORK ORDER # JwPC021425A

5CNG 8/520N4-060610506-88164-36"

FILL HOSE	
DATE	01/09/03
DESIGNED BY	G. SEWELL
DRAWN BY	C.R.S.
DWG. NO.	FILL HOSE 5CNG/520N
SCALE	NONE
SHEET NO.	OF
REV.	2

3

FITTING TYPE

- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

7

FITTING SIZE

- 4 1/4"
- 6 3/8"
- 8 1/2"
- 12 3/4"

1

55 SERIES

- HOSE SIZE
- 4 1/4"
- 6 3/8"
- 8 1/2"
- 12 3/4"

4

FITTING TYPE

- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

8


FITTING SIZE

- 4 1/4"
- 6 3/8"
- 8 1/2"
- 12 3/4"

BREAK-AWAY OR
DISPENSER END

11 FILL HOSE LENGTH
96"

FILL END

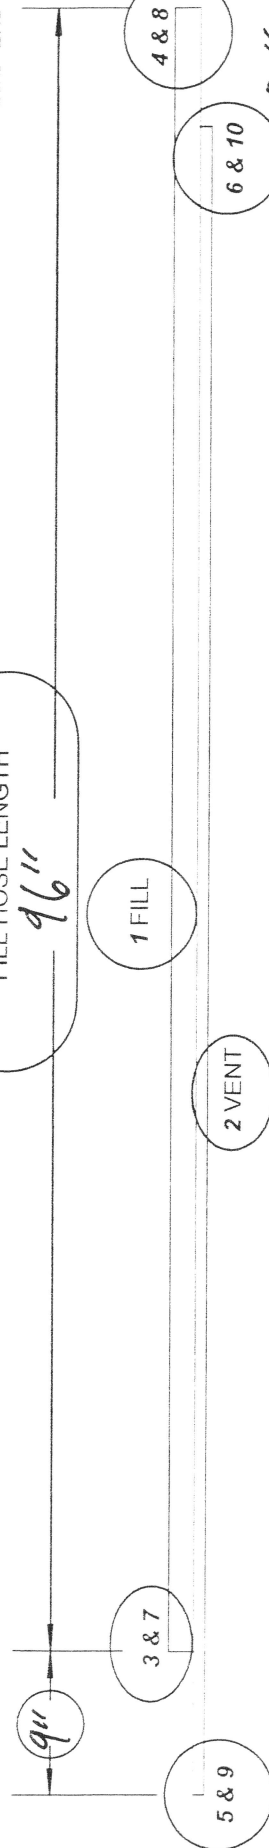

5

FITTING TYPE

- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

9

FITTING SIZE

- 2 1/8"
- 4 1/4"
- 6 3/8"

2

55 SERIES

- HOSE SIZE
- 2 1/8"
- 4 1/4"
- 6 3/8"

6

FITTING TYPE

- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

10

FITTING SIZE

- 2 1/8"
- 4 1/4"
- 6 3/8"

STANDARD 3"
SHEREX 5/8"

5/8"

WORK ORDER #JWPC021425A

5CNG 8/520N 4-06 06-105 06-88 166-96"

FILL HOSE		TUBES, COILS, HOSES, FITTINGS, SWIVELS, ETC.	
DATE	01/09/03	DESIGNED BY	C. SHEWELL
DRAWN BY	C.R.S.	SCALE	NONE
DWG. NO.	5CNG/520N	SHEET NO.	OF
REV.	2		