

Product Code

CNG050S290NCAAEZZZ

PUCK700

Serial ID

15391763

34853504

Order ID

5302991

Line

1.1

Item

1

Customer Tag

25071515

Process

Detail

Process ID : 1.38499128

Process Time : 2025.04.16 13:30:52

Process Stand : TSM1C@SSCB:1


Stand Uncertainty : +/-0.030%

Fluid : H2O

100% Rate : 38.6 KG/MIN

Pickoff : 1

Max Rate P/T : 28.79 PSIG/22.2 C

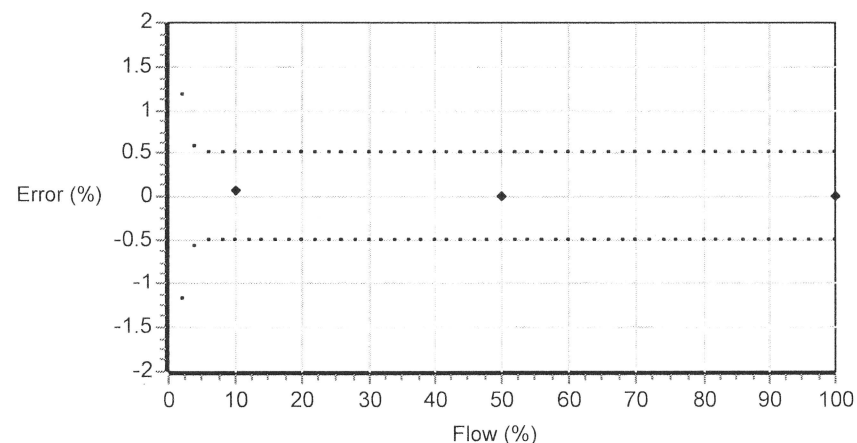

Results

Status : PASS

D1 : 0

D2 : 1

K1 : 4049.468

K2 : 4216.612

DT : 4.25

FD : 0

DTG : 0

DFQ1 : 0

DFQ2 : 0

FlowCal : 140.654.50

FFQ : 0

FTG : 0

DensCal : 04049042174.25

FCF : 140.65

FT : 4.5

Flow (%)	Flow Rate (kg/min)	Meter Total (kg)	Reference Total (kg)	Error (%)	Specification (±%)
100.0	38.6	38.50826	38.51282	-0.012	0.500
10.0	3.86	5.712002	5.707827	0.073	0.500
50.0	19.3	19.10388	19.10128	0.014	0.500
100.0	38.6	37.95615	37.96055	-0.012	0.500

SHRESTHA, GHANA

Technician

This certificate is produced by an electronic data system and is valid without signature.

Product Code	Serial ID	Order ID	Line	Item	Customer Tag
CNG050S290NCAAEZZZ	15391763	5302991	1.1	1	25071515
2700I13ABAEZWZ	12285100	5302991	1.33	1	
PUCK700	34853504				

Process

Process ID : 1.38499891
Process Time : 2025.04.16 18:53:55
Process Stand : SSCB-CONFIG2@SSCB



Sensor

Units

D1 : 0
D2 : 1
DFQ1 : 0
DFQ2 : 0
DT : 4.25
DTG : 0
Dens PCF : 0
Density Meter Factor : 1
FCF : 140.65
FD : 0
FFQ : 0
FT : 4.5
FTG : 0
Flow PCP : 30
Flow PCF : 0
K1 : 4049.468
K2 : 4216.612
Mass Flow Meter Factor : 1
Volume Flow Meter Factor : 1

Special Mass Time Unit : SEC
Special Mass Total Text : NONE
Special Volume Base Unit : L
Special Volume Conv Factor : 1
Special Volume Flow Text : NONE
Special Volume Time Unit : SEC
Special Volume Total Text : NONE
Temperature Unit : C
Volume Flow Unit : L/MIN

MVD Channel Assignments

Channel A Assignment : Milliamp (Primary) Output [#1]
Channel B Power : Active (internally powered)

Assignments

Event 1 Variable : Density
Event 2 Variable : Density
Frequency1 Scaling Method : Frequency = Flow
Frequency Variable 1 : Mass Flow Rate
mA1 Variable : Mass Flow Rate

Units

Ranges

Density Unit : G/CM3
GSV Flow Unit : SCFM
Mass Flow Unit : G/SEC
Pressure Unit : POUNDS/SQUARE INCH
Special GSV Base Time Unit : MIN
Special GSV Base Volume Unit : Standard cubic feet
Special GSV Conv Factor : 1
Special GSV Flow Unit Text : NONE
Special GSV Total Text : NONE
Special Mass Base Unit : G
Special Mass Conv Factor : 1
Special Mass Flow Text : NONE

Event 1 Setpoint : 0
Event 1 Type : Event Low (Event "OFF" if PV > SP)
Event 2 Setpoint : 0
Event 2 Type : Event Low (Event "OFF" if PV > SP)
Frequency1 Active State : Active High
Frequency1 Hertz : 1000
Frequency1 Output Mode : Single
Frequency1 Pulses/Unit : 1.554404
Frequency1 Rate : 643.3333
Frequency1 Units/Pulse : 0.6433333
mA1 LRV : 0
mA1 URV : 643.3333

Faults

Faults

Frequency1 Fault Behavior : Upscale
Frequency1 Fault Value : 15000
mA1 Fault Behavior : Downscale (Default)
mA1 Fault Value : 2

25071515

Other

Calibration Process ID : 1.38499128
Core Software Rev : 35
Density Cutoff : 0.2
Density Damping : 0.8
Density High Limit : 5
Density Low Limit : 0
Direction : FORWARD
Fault Dwell Time : 0
Feature Key : 1
Flow Damping : 0.8
HART Device ID : 4826752
LD Type : 0
Mass Flow Cutoff : 1.836
Pressure Comp Line Pressure : 0
Pressure Compensation State : OFF
RS485 Baud : 1200 baud
RS485 Parity : Odd
RS485 Protocol : HART
Slug Duration : 0
Tag :
Temperature Damping : 2.4
Transmitter Software Rev : 80
Volume Flow Cutoff : 0.11016



Tulsa Gas Technologies, Inc.
4809 S. 101st East Ave Tulsa, OK 74146
PHONE: 918-665-2641 FAX: 918-665-2657

7/21/2025

Dispenser Serial Number 25071515

Micro Motion Transmitter Configuration

Required settings for correct operation of Micro Motion mass flow meter.

Transmitter Model Number: 2700
Sensor Model Number: CNG050
Transmitter Serial Number: 12285100
Sensor Serial Number 15391763
Flow Calibration Factor: 140.654.50
Flow Units LB/min

Communication on RS-485

Protocol Modbus ASCII 7 Bit
Modbus Address 1
Baud Rate 9600
Parity Even
Stop Bits 1

HART Communication

Superimposed on Primary mA (PV)

Analog Output (4-20 mA)

Analog Variable (PV) Mass Flow
Lower Range Value 0.2500 lb/min
Upper Range Value 300.000 lb/min
mA Cutoff 0.0000 lb/min

Freq/Rate

Frequency variable (TV) Mass Flow
Frequency Cutoff 0.2500 lb/min
Pulses per Unit 1000.00000 per lb

Temperature

Temp Units deg F