

CERTIFICATE OF CONFORMANCE
FOR
MATERIALS SHIPPED

Tulsa Gas Technologies, Inc. (TGT) hereby certifies that all materials in the manufacture of hoses for W/O # JWPC021425A conform to the manufacturing specifications indicated in drawings, bulletins or specifications as called for on the said purchase order. Test reports are on file with us or with our suppliers for examination and indicate conformance with applicable specification requirements. In production items listed, no direct contact was made with mercury, any of its compounds or with any mercury containing devices employing a single boundary for containment. Tulsa Gas Technologies, Inc. also certifies that the parts listed and shipped on the date indicated are manufactured in accordance with Parker specifications and quality standards, if applicable, as stated on the drawings or specifications called for on said purchase order. All parts and test conform to AGA I-93.

SIGNED BY: Patrick McElherney
TITLE: Hose Builder
DATE: 7-31-25

Tulsa Gas Technologies, Inc.
4809 S. 101st. E. Ave.
Tulsa, OK 74146
918-665-2641

Work Order #
Customer Name
Customer PO
Date Required

JWPC021425A
Jw Power Co.
P1361289
2-14-25

ASSEMBLY/CERTIFICATION SHEET

		SIGN	DATE
1	☒ Review shop work order versus customer print and history	PM	7-31-25
2	☒ Component part numbers: 10666-8-8, 10666-8-8		
	Pack dates and/or QC codes	PM	7-31-25
3	☒ ID band number 5220508621	PM	7-31-25
4	☒ Hose Cut Length 96"	PM	7-31-25
5	☐ Pre-expansion of hose (if required) Size	PM	7-31-25
	Remarks:		
6	☒ Audit and mark appropriate insertion depth	PM	7-31-25
7	☐ Add special accessories		
	Remarks:		
8	☒ Apply danger tag and ID band	PM	7-31-25
9	☒ Install bend restrictors	PM	7-31-25
	Remarks:		
10	☒ Assemble fittings; check insertion depth	PM	7-31-25
	Remarks:		
11	☐ Set offset angle and/or orientation	PM	7-31-25
	Remarks:		
12	☒ Perform crimp or swage on product crimp set die using Parker Catalog 4660, page K58		
	☒ 1/2) 80C-PO8H		
	☐ 1/4) 80C-PO4H		
	☐ 3/8) 80C-PO6		
	☐ 3/8) 80C-PO6H		
	☐ 1/8) 80C-PO2		
	☐ 3/4) 80C-P12H	PM	7-31-25
13	☐ Add special accessories after crimping/swaging		
14	☐ Perform and record burst test results, if applicable		
	Remarks:		
15	☐ Air test, if applicable		
	Test pressure Psi _____ Seconds _____ : Pass/Fail (Circle One)		
	Remarks:		
16	☒ Hydrostatic proof test		
	Test pressure Psi 10,000 Seconds 30 (Pass/Fail (Circle One))		
	Remarks:	PM	7-31-25
17	☒ Flush method water, and then air	PM	7-31-25
18	☒ Perform and record conductivity test: Meter Megger Mit200		
	Hose resistance 0.02 (-) Electrode resistance 0.03		
	(=) Final hose resistance 0.03	PM	7-31-25
19	☒ Final audit: Check boxes for items inspected, as applicable:		
	☒ Correct hose; ☒ Correct fittings; ☒ Correct customer PN	PM	7-31-25
20	☒ Check swage or crimp diameters:		
	5CNG-4-58 .668/.688		
	5CNG-6-58 .785/.805		
	5CNG-8-58 .900/.920	PM	7-31-25
	5CNG-12-58 1.20/1.22		
	*****100% VISUAL INSPECT FOR THE FOLLOWING*****		
21	☒ Hose fittings crimped; ☒ Air passes through assembly:		
	☒ Presence of threads	PM	7-31-25
20	☒ Cap and package nose	PM	7-31-25
21	☒ Certificate of Conformance for Materials Shipped (on back)	PM	7-31-25

3

FITTING TYPE

- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

7

FITTING SIZE

- 4 1/4"
- 6 3/8"
- 8 1/2"
- 12 3/4"

1

55 SERIES
HOSE SIZE

- 4 1/4"
- 6 3/8"
- 8 1/2"
- 12 3/4"

4

FITTING TYPE

- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

8

FITTING SIZE


- 4 1/4"
- 6 3/8"
- 8 1/2"
- 12 3/4"

BREAK-AWAY OR
DISPENSER END

11 FILL HOSE LENGTH

96"

FILL END

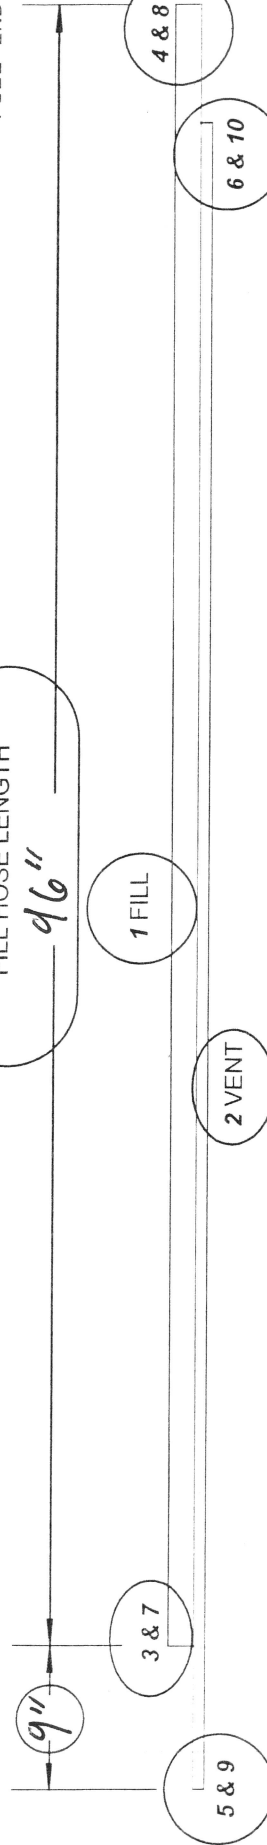

5

FITTING TYPE

- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

9

FITTING SIZE

- 2 1/8"
- 4 1/4"
- 6 3/8"

2

55 SERIES
HOSE SIZE

- 2 1/8"
- 4 1/4"
- 6 3/8"

6

FITTING TYPE

- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

10

FITTING SIZE

- 2 1/8"
- 4 1/4"
- 6 3/8"

STANDARD 3"
SHEREX 5/8"

WORK ORDER #JWPC021425A

5CNG 8/520NH-0606/0506-88/66-96"

FILL HOSE		LUSAS GAS TIGHTENING LTD. S. INC. 10117 EAST 14TH STREET LUSAS, OR 97146	
DATE	01/09/03	DESIGNED BY	C. SEWELL
DRAWN BY	C. S.	CHECKED BY	
DWG. NO.	FILLHOSE 5CNG-520N	SCALE	NONE
SHEET NO.	OF	REV.	2

Tulsa Gas Technologies, Inc.
4309 S. 101st. E. Ave.
Tulsa, OK 74146
918-665-2641

Work Order #
Customer Name
Customer PO
Date Required

JWPC021425A
Jw Power Co.
P1361289
2-14-25

ASSEMBLY/CERTIFICATION SHEET

- | | | SIGN | DATE |
|----|--|------|---------|
| 1 | ☒ Review shop work order versus customer print and history | PM | 7-31-25 |
| 2 | ☒ Component part numbers: 106CG-8-8, 106CG-8-8
Pack dates and/or QC codes | PM | 7-31-25 |
| 3 | ☒ ID band number 5220508621 | PM | 7-31-25 |
| 4 | ☒ Hose Cut Length 36" | PM | 7-31-25 |
| 5 | Pre-expansion of hose (if required) Size
Remarks: | PM | 7-31-25 |
| 6 | ☒ Audit and mark appropriate insertion depth | PM | 7-31-25 |
| 7 | Add special accessories
Remarks: | | |
| 8 | ☒ Apply danger tag and ID band | PM | 7-31-25 |
| 9 | ☒ Install bend restrictors
Remarks: | PM | 7-31-25 |
| 10 | ☒ Assemble fittings; check insertion depth
Remarks: | PM | 7-31-25 |
| 11 | Set offset angle and/or orientation
Remarks: | | |
| 12 | ☒ Perform crimp or swage on product crimp set die using Parker Catalog 4660, page K58
1/2) 80C-PO8H 3/8) 80C-PO6H
1/4) 80C-PO4H 1/8) 80C-PO2
3/8) 80C-PO6 3/4) 80C-P12H | PM | 7-31-25 |
| 13 | Add special accessories after crimping/swaging | | |
| 14 | Perform and record burst test results, if applicable
Remarks: | | |
| 15 | Air test, if applicable
Test pressure Psi _____ Seconds _____ : Pass/Fail (Circle One)
Remarks: | | |
| 16 | ☒ Hydrostatic proof test
Test pressure Psi 10,000 Seconds 30 (Pass/Fail (Circle One))
Remarks: | PM | 7-31-25 |
| 17 | ☒ Flush method water, and then air | PM | 7-31-25 |
| 18 | ☒ Perform and record conductivity test: Meter Megger Mit200
Hose resistance 0.00 (-) Electrode resistance 0.03
(=) Final hose resistance 0.03 | PM | 7-31-25 |
| 19 | ☒ Final audit: Check boxes for items inspected, as applicable:
Correct hose; Correct fittings; Correct customer PN | PM | 7-31-25 |
| 20 | ☒ Check swage or crimp diameters:
5CNG-6-58 .785/.805 5CNG-8-58 .900/.920
5CNG-6-55 .675/.695 5CNG-12-58 1.20/1.22 | PM | 7-31-25 |
| 21 | ☒ Hose fittings crimped; 100% VISUAL INSPECT FOR THE FOLLOWING
Presence of threads Air passes through assembly; | PM | 7-31-25 |
| 20 | ☒ Cap and package nose | PM | 7-31-25 |
| 21 | ☒ Certificate of Conformance for Materials Shipped (on back) | PM | 7-31-25 |

3

FITTING TYPE

- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

7

FITTING SIZE

- 4 1/4"
- 6 3/8"
- 8 1/2"
- 12 3/4"

1

55 SERIES

- HOSE SIZE
- 4 1/4"
- 6 3/8"
- 8 1/2"
- 12 3/4"

4

FITTING TYPE


- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

8

FITTING SIZE

- 4 1/4"
- 6 3/8"
- 8 1/2"
- 12 3/4"

BREAK-AWAY OR
DISPENSER END

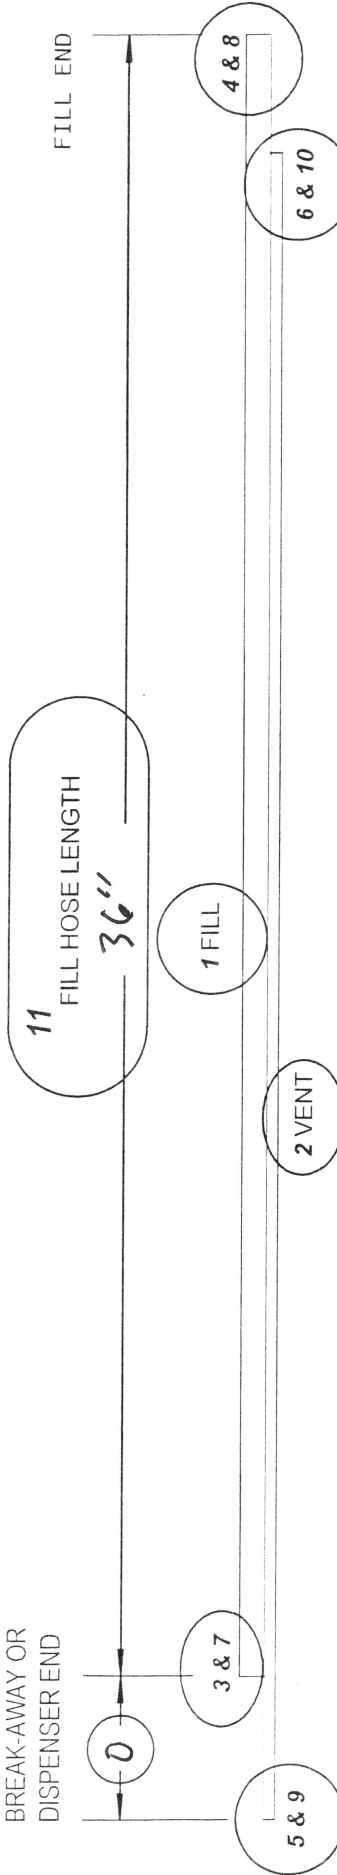

5

FITTING TYPE

- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

9

FITTING SIZE

- 2 1/8"
- 4 1/4"
- 6 3/8"

2

55 SERIES

- HOSE SIZE
- 2 1/8"
- 4 1/4"
- 6 3/8"

6

FITTING TYPE

- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

10

FITTING SIZE

- 2 1/8"
- 4 1/4"
- 6 3/8"

STANDARD 3" }
SHEREX 5/8" }

WORK ORDER #JWPC021425A

5CNG 8 / 520N 4 - 06 06 / 05 06 - 8 8 / 16 4 - 36 11

FILL HOSE		LUBSA GAS TIGHTENING & INC. 10117 EAST 90TH STREET LUBSA CR 74146 910 605 2641 FAX 910 605 2657	
DATE	01/09/03	DESIGNED BY	C. SEWELL
DRAWN BY	CRS	CHECKED BY	
DWG. NO.	FILLHOSE 5CNG-520N	SCALE	NONE
SHEET NO.	OF	REV.	2