

CERTIFICATE OF CONFORMANCE
FOR
MATERIALS SHIPPED

Tulsa Gas Technologies, Inc. (TGT) hereby certifies that all materials in the manufacture of hoses for W/O # GCI031825 conform to the manufacturing specifications indicated in drawings, bulletins or specifications as called for on the said purchase order. Test reports are on file with us or with our suppliers for examination and indicate conformance with applicable specification requirements. In production items listed, no direct contact was made with mercury, any of its compounds or with any mercury containing devices employing a single boundary for containment. Tulsa Gas Technologies, Inc. also certifies that the parts listed and shipped on the date indicated are manufactured in accordance with Parker specifications and quality standards, if applicable, as stated on the drawings or specifications called for on said purchase order. All parts and test conform to AGA I-93.

SIGNED BY: Patrick McElhoney
TITLE: Hose Builder
DATE: 8-27-25

Tulsa Gas Technologies, Inc.
1809 S. 101st. E. Ave.
Tulsa, OK 74146
918-665-2641

Work Order #
Customer Name
Customer PO
Date Required

GCT 031825
Genesis Contracting Inc.
24-3603
7-22-25

ASSEMBLY/CERTIFICATION SHEET

		SIGN	DATE						
1	☒ Review shop work order versus customer print and history	OSN	8-27-25						
2	☒ Component part numbers: <u>105CG-6-6, 106CG-8-6</u> Pack dates and/or QC codes	OSN	8-27-25						
3	☒ ID band number	OSN	8-27-25						
4	☒ Hose Cut Length <u>24'</u>	OSN	8-27-25						
5	Pre-expansion of hose (if required) Size Remarks:	OSN	8-27-25						
6	☒ Audit and mark appropriate insertion depth	OSN	8-27-25						
7	Add special accessories Remarks:	OSN	8-27-25						
8	☒ Apply danger tag and ID band	OSN	8-27-25						
9	☒ Install bend restrictors Remarks:	OSN	8-27-25						
10	☒ Assemble fittings, check insertion depth Remarks:	OSN	8-27-25						
11	Set offset angle and/or orientation Remarks:	OSN	8-27-25						
12	☒ Perform crimp or swage on product crimp set die using Parker Catalog 4660, page K58 <table border="0"><tr><td>☐ 1/2" 80C-PO8H</td><td>☐ 3/8" 80C-PO6H</td></tr><tr><td>☒ 1/4" 80C-PO4H</td><td>☐ 1/8" 80C-PO2</td></tr><tr><td>☐ 3/8" 80C-PO6</td><td>☐ 3/4" 80C-P12H</td></tr></table>	☐ 1/2" 80C-PO8H	☐ 3/8" 80C-PO6H	☒ 1/4" 80C-PO4H	☐ 1/8" 80C-PO2	☐ 3/8" 80C-PO6	☐ 3/4" 80C-P12H	OSN	8-27-25
☐ 1/2" 80C-PO8H	☐ 3/8" 80C-PO6H								
☒ 1/4" 80C-PO4H	☐ 1/8" 80C-PO2								
☐ 3/8" 80C-PO6	☐ 3/4" 80C-P12H								
13	Add special accessories after crimping/swaging								
14	Perform and record burst test results, if applicable Remarks:								
15	Air test, if applicable Test pressure Psi _____ Seconds _____ Pass/Fail (Circle One) Remarks:								
16	☒ Hydrostatic proof test Test pressure Psi <u>10,000</u> Seconds <u>30</u> (Pass/Fail (Circle One)) Remarks:	OSN	8-27-25						
17	☒ Flush method water, and then air	OSN	8-27-25						
18	☒ Perform and record conductivity test: Meter <u>Megger Mit200</u> Hose resistance _____ (-) Electrode resistance <u>0.03</u> (=) Final hose resistance <u>0.03</u>	OSN	8-27-25						
19	☒ Final audit: Check boxes for items inspected, as applicable: ☒ Correct hose; ☒ Correct fittings; ☒ Correct customer PN	OSN	8-27-25						
20	☒ Check swage or crimp diameters: <table border="0"><tr><td>☒ 5CNG-6-58 .785/.805</td><td>☐ 5CNG-8-58 .900/.920</td></tr><tr><td>☒ 5CNG-8-55 .675/.695</td><td>☐ 5CNG-12-58 1.20/1.22</td></tr></table>	☒ 5CNG-6-58 .785/.805	☐ 5CNG-8-58 .900/.920	☒ 5CNG-8-55 .675/.695	☐ 5CNG-12-58 1.20/1.22	OSN	8-27-25		
☒ 5CNG-6-58 .785/.805	☐ 5CNG-8-58 .900/.920								
☒ 5CNG-8-55 .675/.695	☐ 5CNG-12-58 1.20/1.22								
21	*****100% VISUAL INSPECT FOR THE FOLLOWING***** ☒ Hose fittings crimped; ☒ Air passes through assembly; ☒ Presence of threads								
20	☒ Cap and package hose	OSN	8-27-25						
21	☒ Certificate of Conformance for Materials Shipped (on back)	OSN	8-27-25						

Tulsa Gas Technologies, Inc.
4309 S. 101st. E. Ave.
Tulsa, OK 74146
918-665-2641

Work Order #
Customer Name
Customer PO
Date Required

GCT031825
Genesis Contracting Inc.
24-2603
7-22-25

ASSEMBLY/CERTIFICATION SHEET

		SIGN	DATE						
1	☒ Review shop work order versus customer print and history	ASL	8-27-25						
2	☒ Component part numbers: 105CG-6-6, 106CG-8-6								
	Pack dates and/or QC codes								
3	☒ ID band number	ASL	8-27-25						
4	☒ Hose Cut Length 24"	ASL	8-27-25						
5	☐ Pre-expansion of hose (if required) Size	ASL	8-27-25						
	Remarks:								
6	☒ Audit and mark appropriate insertion depth	ASL	8-27-25						
7	☐ Add special accessories								
	Remarks:								
8	☒ Apply danger tag and ID band	ASL	8-27-25						
9	☒ Install bend restrictors								
	Remarks:								
10	☒ Assemble fittings; check insertion depth	ASL	8-27-25						
	Remarks:	ASL	8-27-25						
11	☐ Set offset angle and/or orientation								
	Remarks:								
12	☒ Perform crimp or swage on product crimp set die using Parker Catalog 4660, page K58								
	<table border="0"><tr><td>☐ 1/2) 80C-PO8H</td><td>☐ 3/8) 80C-PO6H</td></tr><tr><td>☐ 1/4) 80C-PO4H</td><td>☐ 1/8) 80C-PO2</td></tr><tr><td>☒ 3/8) 80C-PO6</td><td>☐ 3/4) 80C-P12H</td></tr></table>	☐ 1/2) 80C-PO8H	☐ 3/8) 80C-PO6H	☐ 1/4) 80C-PO4H	☐ 1/8) 80C-PO2	☒ 3/8) 80C-PO6	☐ 3/4) 80C-P12H	ASL	8-27-25
☐ 1/2) 80C-PO8H	☐ 3/8) 80C-PO6H								
☐ 1/4) 80C-PO4H	☐ 1/8) 80C-PO2								
☒ 3/8) 80C-PO6	☐ 3/4) 80C-P12H								
13	☐ Add special accessories after crimping/swaging								
14	☐ Perform and record burst test results, if applicable								
	Remarks:								
15	☐ Air test, if applicable								
	Test pressure Psi _____ Seconds _____ (Pass/Fail (Circle One))								
	Remarks:								
16	☒ Hydrostatic proof test								
	Test pressure Psi 10,000 Seconds 30 (Pass/Fail (Circle One))	ASL	8-27-25						
	Remarks:	ASL	8-27-25						
17	☒ Flush method water, and then air								
18	☒ Perform and record conductivity test: Meter Megger Mit200								
	Hose resistance 0.00 (-) Electrode resistance 0.03								
	(F) Final hose resistance 0.03	ASL	8-27-25						
19	☒ Final audit: Check boxes for items inspected, as applicable:	ASL	8-27-25						
	☒ Correct hose; ☒ Correct fittings; ☒ Correct customer PN	ASL	8-27-25						
20	☒ Check swage or crimp diameters:								
	<table border="0"><tr><td>☒ 5CNG-4-58 .668/.688</td><td>☐ 5CNG-8-58 .900/.920</td></tr><tr><td>☒ 5CNG-6-58 .785/.805</td><td>☐ 5CNG-12-58 1.20/1.22</td></tr><tr><td>☒ 5CNG-8-55 .675/.695</td><td></td></tr></table>	☒ 5CNG-4-58 .668/.688	☐ 5CNG-8-58 .900/.920	☒ 5CNG-6-58 .785/.805	☐ 5CNG-12-58 1.20/1.22	☒ 5CNG-8-55 .675/.695		ASL	8-27-25
☒ 5CNG-4-58 .668/.688	☐ 5CNG-8-58 .900/.920								
☒ 5CNG-6-58 .785/.805	☐ 5CNG-12-58 1.20/1.22								
☒ 5CNG-8-55 .675/.695									
	*****100% VISUAL INSPECT FOR THE FOLLOWING*****								
21	☒ Hose fittings crimped; ☒ Air passes through assembly;	ASL	8-27-25						
	☒ Presence of threads								
22	☒ Cap and package hose	ASL	8-27-25						
23	☒ Certificate of Conformance for Materials Shipped (on back)	ASL	8-27-25						

- 3

FITTING TYPE

01 NPT MALE

02 NPT FEMALE

03 JIC MALE

04 SAE 45 MALE

05 SAE O-RING STRAIGHT THREAD

06 JIC FEMALE SWIVEL

07 FEMALE PIPE SWIVEL
- 7

FITTING SIZE

4 1/4"

6 3/8"

8 1/2"

10 5/8"

12 3/4"
- 1

CG SERIES

HOSE SIZE

4 1/4"

6 3/8"

8 1/2"

12 3/4"
- 4

FITTING TYPE

01 NPT MALE

02 NPT FEMALE

03 JIC MALE

04 SAE 45 MALE

05 SAE O-RING STRAIGHT THREAD

06 JIC FEMALE SWIVEL

07 FEMALE PIPE SWIVEL
- 8

FITTING SIZE


4 1/4"

6 3/8"

8 1/2"

10 5/8"

12 3/4"

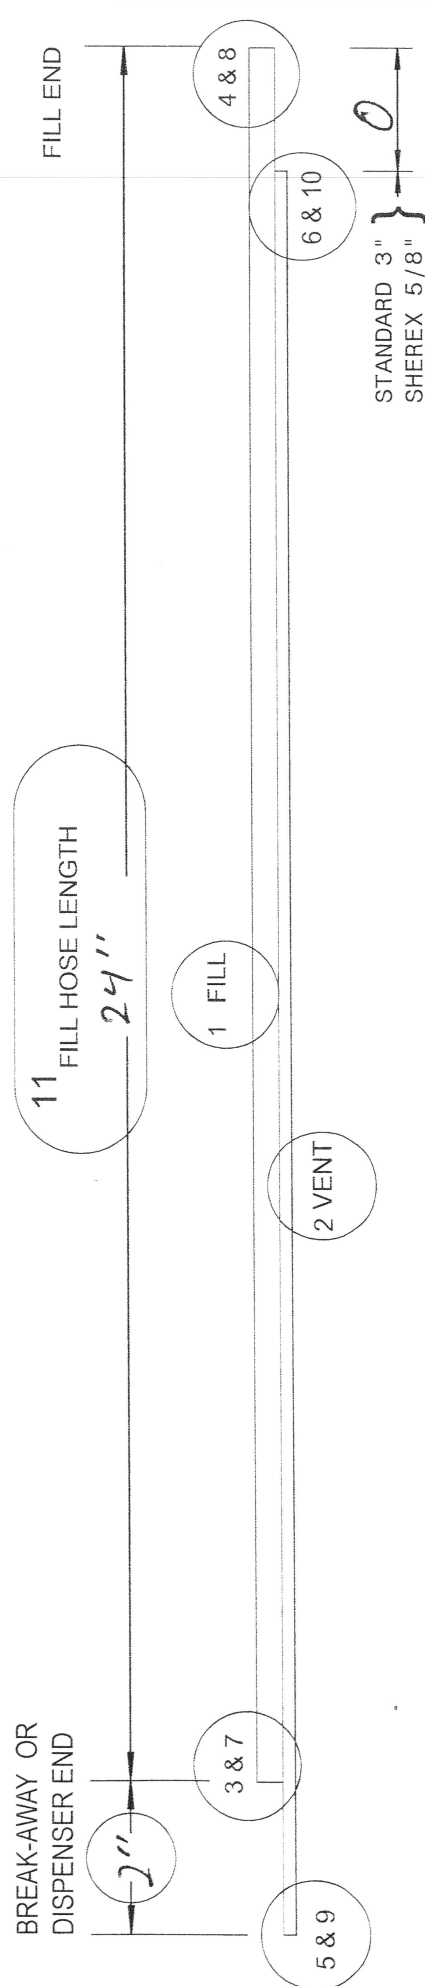

- 5

FITTING TYPE

01 NPT MALE

02 NPT FEMALE

03 JIC MALE

04 SAE 45 MALE

05 SAE O-RING STRAIGHT THREAD

06 JIC FEMALE SWIVEL

07 FEMALE PIPE SWIVEL
- 9

FITTING SIZE

2 1/8"

4 1/4"

6 3/8"
- 2

CG SERIES

HOSE SIZE

4 1/4"

6 3/8"
- 6

FITTING TYPE

01 NPT MALE

02 NPT FEMALE

03 JIC MALE

04 SAE 45 MALE

05 SAE O-RING STRAIGHT THREAD

06 JIC FEMALE SWIVEL

07 FEMALE PIPE SWIVEL
- 10

FITTING SIZE

2 1/8"

4 1/4"

6 3/8"

Tulsa Gas Technologies, Inc.
4809 S. 101st. E. Ave.
Tulsa, OK 74146
918-665-2641

Work Order #
Customer Name
Customer PO
Date Required

GCT031825
Genesis Contracting Inc.
24-3603
7-22-25

ASSEMBLY/CERTIFICATION SHEET

		SIGN	DATE						
1	☒ Review shop work order versus customer print and history	DSL	8-27-25						
2	☒ Component part numbers: 105CG-6-6, 101CG-4-6 Pack dates and/or QC codes								
3	☒ ID band number	DSL	8-27-25						
4	☒ Hose Cut Length 96"	DSL	8-27-25						
5	☐ Pre-expansion of hose (if required) Size Remarks:	DSL	8-27-25						
6	☒ Audit and mark appropriate insertion depth	DSL	8-27-25						
7	☐ Add special accessories Remarks:	DSL	8-27-25						
8	☒ Apply danger tag and ID band	DSL	8-27-25						
9	☒ Install bend restrictors Remarks:	DSL	8-27-25						
10	☒ Assemble fittings; check insertion depth Remarks:								
11	☐ Set offset angle and/or orientation Remarks:	DSL	8-27-25						
12	☒ Perform crimp or swage on product crimp set die using Parker Catalog 4660, page K58 <table border="0" style="width: 100%;"><tr><td>1/2) 80C-PO8H</td><td>3/8) 80C-PO6H</td></tr><tr><td>1/4) 80C-PO4H</td><td>1/8) 80C-PO2</td></tr><tr><td>☒ 3/8) 80C-PO6</td><td>3/4) 80C-P12H</td></tr></table>	1/2) 80C-PO8H	3/8) 80C-PO6H	1/4) 80C-PO4H	1/8) 80C-PO2	☒ 3/8) 80C-PO6	3/4) 80C-P12H	DSL	8-27-25
1/2) 80C-PO8H	3/8) 80C-PO6H								
1/4) 80C-PO4H	1/8) 80C-PO2								
☒ 3/8) 80C-PO6	3/4) 80C-P12H								
13	☐ Add special accessories after crimping/swaging								
14	☐ Perform and record burst test results, if applicable Remarks:								
15	☐ Air test, if applicable Test pressure Psi _____ Seconds _____ : Pass/Fail (Circle One) Remarks:								
16	☒ Hydrostatic proof test Test pressure Psi 10,000 Seconds 30 (Pass/Fail (Circle One)) Remarks:	DSL	8-27-25						
17	☒ Flush method water, and then air	DSL	8-27-25						
18	☒ Perform and record conductivity test: Meter Megger Mit200 Hose resistance _____ (-) Electrode resistance 0.03 (=) Final hose resistance 0.03	DSL	8-27-25						
19	☒ Final audit: Check boxes for items inspected, as applicable: ☒ Correct hose; ☒ Correct fittings; ☒ Correct customer PN	DSL	8-27-25						
20	☒ Check swage or crimp diameters: 5CNG-6-58 .785/.805 5CNG-8-58 .900/.920 ☒ 5CNG-6-55 .675/.695 5CNG-12-58 1.20/1.22	DSL	8-27-25						
21	☒ Hose fittings crimped; ☒ 100% VISUAL INSPECT FOR THE FOLLOWING ☒ Presence of threads ☒ Air passes through assembly;	DSL	8-27-25						
22	☒ Cap and package hose	DSL	8-27-25						
23	☒ Certificate of Conformance for Materials Shipped for back	DSL	8-27-25						

Tulsa Gas Technologies, Inc.
4809 S. 101st. E. Ave.
Tulsa, OK 74146
918-665-2641

Work Order #
Customer Name
Customer PO
Date Required

GCI 031825
Genesis Contracting Inc.
24-3603
7-22-25

ASSEMBLY/CERTIFICATION SHEET

		SIGN	DATE						
1	☒ Review shop work order versus customer print and history	DSL	8-27-25						
2	☒ Component part numbers: <u>105CG-6-6, 101CG-4-6</u> Pack dates and/or QC codes	DSL	8-27-25						
3	☒ ID band number	DSL	8-27-25						
4	☒ Hose Cut Length <u>96'</u>	DSL	8-27-25						
5	☐ Pre-expansion of hose (if required) Size Remarks:	DSL	8-27-25						
6	☒ Audit and mark appropriate insertion depth	DSL	8-27-25						
7	☐ Add special accessories Remarks:	DSL	8-27-25						
8	☒ Apply danger tag and ID band	DSL	8-27-25						
9	☒ Install bend restrictors Remarks:	DSL	8-27-25						
10	☒ Assemble fittings; check insertion depth Remarks:	DSL	8-27-25						
11	☐ Set offset angle and/or orientation Remarks:	DSL	8-27-25						
12	☒ Perform crimp or swage on product crimp set die using Parker Catalog 4660, page K58 <table border="0" style="width: 100%;"><tr><td>☐ 1/2) 80C-PO8H</td><td>☐ 3/8) 80C-PO6H</td></tr><tr><td>☐ 1/4) 80C-PO4H</td><td>☐ 1/8) 80C-PO2</td></tr><tr><td>☒ 3/8) 80C-PO6</td><td>☐ 3/4) 80C-P12H</td></tr></table>	☐ 1/2) 80C-PO8H	☐ 3/8) 80C-PO6H	☐ 1/4) 80C-PO4H	☐ 1/8) 80C-PO2	☒ 3/8) 80C-PO6	☐ 3/4) 80C-P12H	DSL	8-27-25
☐ 1/2) 80C-PO8H	☐ 3/8) 80C-PO6H								
☐ 1/4) 80C-PO4H	☐ 1/8) 80C-PO2								
☒ 3/8) 80C-PO6	☐ 3/4) 80C-P12H								
13	☐ Add special accessories after crimping/swaging								
14	☐ Perform and record burst test results, if applicable Remarks:								
15	☐ Air test, if applicable Test pressure Psi _____ Seconds _____ Pass/Fail (Circle One) Remarks:								
16	☒ Hydrostatic proof test Test pressure Psi <u>10,000</u> Seconds <u>30</u> <u>(Pass)</u> Fail (Circle One) Remarks:	DSL	8-27-25						
17	☒ Flush method water, and then air	DSL	8-27-25						
18	☒ Perform and record conductivity test: Meter _____ Megger Mlt200 Hose resistance <u>0.02</u> (-) Electrode resistance <u>0.03</u> (-) Final hose resistance <u>0.03</u>	DSL	8-27-25						
19	☒ Final audit: Check boxes for items inspected, as applicable: ☒ Correct hose; ☒ Correct fittings; ☒ Correct customer PN	DSL	8-27-25						
20	☒ Check swage or crimp diameters: <table border="0" style="width: 100%;"><tr><td>☒ 5CNG-4-58 .668/.688</td><td>☐ 5CNG-8-58 .900/.920</td></tr><tr><td>☒ 5CNG-6-58 .785/.805</td><td>☐ 5CNG-12-58 1.20/1.22</td></tr><tr><td>☒ 5CNG-6-55 .675/.695</td><td></td></tr></table>	☒ 5CNG-4-58 .668/.688	☐ 5CNG-8-58 .900/.920	☒ 5CNG-6-58 .785/.805	☐ 5CNG-12-58 1.20/1.22	☒ 5CNG-6-55 .675/.695		DSL	8-27-25
☒ 5CNG-4-58 .668/.688	☐ 5CNG-8-58 .900/.920								
☒ 5CNG-6-58 .785/.805	☐ 5CNG-12-58 1.20/1.22								
☒ 5CNG-6-55 .675/.695									
21	☒ Hose fittings crimped; ☒ 100% VISUAL INSPECT FOR THE FOLLOWING ☒ Presence of threads ☒ Air passes through assembly;	DSL	8-27-25						
22	☒ Cap and package hose	DSL	8-27-25						
23	☒ Certificate of Conformance for Materials Shipped (on back)	DSL	8-27-25						

3

FITTING TYPE

01 NPT MALE

02 NPT FEMALE

03 JIC MALE

04 SAE 45 MALE

05 SAE O-RING STRAIGHT THREAD

06 JIC FEMALE SWIVEL

07 FEMALE PIPE SWIVEL

7

FITTING SIZE

4 1/4"

6 3/8"

8 1/2"

10 5/8"

12 3/4"

1

CG SERIES

HOSE SIZE

4 1/4"

6 3/8"

8 1/2"

12 3/4"

4

FITTING TYPE

01 NPT MALE

02 NPT FEMALE

03 JIC MALE

04 SAE 45 MALE

05 SAE O-RING STRAIGHT THREAD

06 JIC FEMALE SWIVEL

07 FEMALE PIPE SWIVEL

8

FITTING SIZE

4 1/4"

6 3/8"

8 1/2"

10 5/8"

12 3/4"

BREAK-AWAY OR

DISPENSER END

2"

3 & 7

5 & 9

11 FILL HOSE LENGTH

96"

1 FILL

2 VENT

4 & 8

6 & 10

STANDARD 3"
SHEREX 5/8"

3"

FILL END

5

FITTING TYPE

01 NPT MALE

02 NPT FEMALE

03 JIC MALE

04 SAE 45 MALE

05 SAE O-RING STRAIGHT THREAD

06 JIC FEMALE SWIVEL

07 FEMALE PIPE SWIVEL

9

FITTING SIZE

2 1/8"

4 1/4"

6 3/8"

2

CG SERIES

HOSE SIZE

4 1/4"

6 3/8"

6

FITTING TYPE

01 NPT MALE

02 NPT FEMALE

03 JIC MALE

04 SAE 45 MALE

05 SAE O-RING STRAIGHT THREAD

06 JIC FEMALE SWIVEL

07 FEMALE PIPE SWIVEL

10

FITTING SIZE

2 1/8"

4 1/4"

6 3/8"

WORK ORDER # 91031825

5CNG 6/520N 4-05 01/01 06-64/24-96

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

<