

CERTIFICATE OF CONFORMANCE
FOR
MATERIALS SHIPPED

Tulsa Gas Technologies, Inc. (TGT) hereby certifies that all materials in the manufacture of hoses for W/O # GCI031825 conform to the manufacturing specifications indicated in drawings, bulletins or specifications as called for on the said purchase order. Test reports are on file with us or with our suppliers for examination and indicate conformance with applicable specification requirements. In production items listed, no direct contact was made with mercury, any of its compounds or with any mercury containing devices employing a single boundary for containment. Tulsa Gas Technologies, Inc. also certifies that the parts listed and shipped on the date indicated are manufactured in accordance with Parker specifications and quality standards, if applicable, as stated on the drawings or specifications called for on said purchase order. All parts and test conform to AGA I-93.

SIGNED BY: Patrick McElhoney
TITLE: Hose Builder
DATE: 8-27-25

Tulsa Gas Technologies, Inc.
4809 S. 101st. E. Ave.
Tulsa, OK 74146
918-663-2641

Work Order #
Customer Name
Customer PO
Date Required

GCT031825
Genesis Contracting Inc.
24-3603
7-22-25

ASSEMBLY/CERTIFICATION SHEET

		SIGN	DATE						
1	☒ Review shop work order versus customer print and history	OSL	8-27-25						
2	☒ Component part numbers: <u>105CG-6-6, 106CG-8-6</u> Pack dates and/or QC codes	OSL	8-27-25						
3	☒ ID band number	OSL	8-27-25						
4	☒ Hose Out Length <u>24"</u>	OSL	8-27-25						
5	Pre-expansion of hose (if required) Size Remarks:	OSL	8-27-25						
6	☒ Audit and mark appropriate insertion depth	OSL	8-27-25						
7	Add special accessories Remarks:	OSL	8-27-25						
8	☒ Apply danger tag and ID band	OSL	8-27-25						
9	☒ Install bend restrictors Remarks:	OSL	8-27-25						
10	☒ Assemble fittings; check insertion depth Remarks:	OSL	8-27-25						
11	Set offset angle and/or orientation Remarks:	OSL	8-27-25						
12	☒ Perform crimp or swage on product crimp set die using Parker Catalog 4660, page K58 <table border="0"><tr><td>☒ 1/2 80C-PO8H</td><td>☐ 3/8 80C-PO6H</td></tr><tr><td>☒ 1/4 80C-PO4H</td><td>☐ 1/8 80C-PO2</td></tr><tr><td>☐ 3/8 80C-PO6</td><td>☐ 3/4 80C-P12H</td></tr></table>	☒ 1/2 80C-PO8H	☐ 3/8 80C-PO6H	☒ 1/4 80C-PO4H	☐ 1/8 80C-PO2	☐ 3/8 80C-PO6	☐ 3/4 80C-P12H	OSL	8-27-25
☒ 1/2 80C-PO8H	☐ 3/8 80C-PO6H								
☒ 1/4 80C-PO4H	☐ 1/8 80C-PO2								
☐ 3/8 80C-PO6	☐ 3/4 80C-P12H								
13	Add special accessories after crimping/swaging								
14	Perform and record burst test results, if applicable Remarks:								
15	Air test, if applicable Test pressure Psi _____ Seconds _____ Pass/Fail (Circle One) Remarks:								
16	☒ Hydrostatic proof test Test pressure Psi <u>10,000</u> Seconds <u>30</u> (Pass/Fail (Circle One)) Remarks:	OSL	8-27-25						
17	☒ Flush method water, and then air	OSL	8-27-25						
18	☒ Perform and record conductivity test: Meter _____ Megger Mlt200 Hose resistance <u>0.00</u> (-) Electrode resistance <u>0.03</u> (=) Final hose resistance <u>0.03</u>	OSL	8-27-25						
19	☒ Final audit: Check boxes for items inspected, as applicable: <table border="0"><tr><td>☒ Correct hose;</td><td>☒ Correct fittings;</td><td>☒ Correct customer PN</td></tr></table>	☒ Correct hose;	☒ Correct fittings;	☒ Correct customer PN	OSL	8-27-25			
☒ Correct hose;	☒ Correct fittings;	☒ Correct customer PN							
20	☒ Check swage or crimp diameters: <table border="0"><tr><td>☒ 5CNG-4-58 .668/.686</td><td>☐ 5CNG-8-58 .900/.920</td></tr><tr><td>☒ 5CNG-6-58 .785/.805</td><td>☐ 5CNG-12-58 1.20/1.22</td></tr><tr><td>☒ 5CNG-8-58 .675/.695</td><td></td></tr></table>	☒ 5CNG-4-58 .668/.686	☐ 5CNG-8-58 .900/.920	☒ 5CNG-6-58 .785/.805	☐ 5CNG-12-58 1.20/1.22	☒ 5CNG-8-58 .675/.695		OSL	8-27-25
☒ 5CNG-4-58 .668/.686	☐ 5CNG-8-58 .900/.920								
☒ 5CNG-6-58 .785/.805	☐ 5CNG-12-58 1.20/1.22								
☒ 5CNG-8-58 .675/.695									
*****100% VISUAL INSPECT FOR THE FOLLOWING*****									
21	☒ Hose fittings crimped;								
	☒ Presence of threads								
22	☒ Cap and package hose	OSL	8-27-25						
23	☒ Certificate of Conformance for Materials Shipped (on back)	OSL	8-27-25						

Tulsa Gas Technologies, Inc.
4809 S. 101st. E. Ave.
Tulsa, OK 74146
918-665-2641

Work Order #
Customer Name
Customer PO
Date Required

GCT031825
Genesis Contracting Inc.
24-3603
7-22-25

ASSEMBLY/CERTIFICATION SHEET

		SIGN	DATE
1	☒ Review shop work order versus customer print and history	DSR	8-27-25
2	☒ Component part numbers: 105CG-6-6, 106CG-8-6 Pack dates and/or QC codes	DSR	8-27-25
3	☒ ID band number	DSR	8-27-25
4	☒ Hose Cut Length 24"	DSR	8-27-25
5	☐ Pre-expansion of hose (if required) Size Remarks:	DSR	8-27-25
6	☒ Audit and mark appropriate insertion depth	DSR	8-27-25
7	☐ Add special accessories Remarks:	DSR	8-27-25
8	☒ Apply danger tag and ID band	DSR	8-27-25
9	☒ Install bend restrictors Remarks:	DSR	8-27-25
10	☒ Assemble fittings; check insertion depth Remarks:	DSR	8-27-25
11	☐ Set offset angle and/or orientation Remarks:	DSR	8-27-25
12	☒ Perform crimp or swage on product crimp set die-Using Parker Catalog 4660, page K58 1/2) 80C-PO8H 3/8) 80C-PO6H 1/4) 80C-PO4H 1/8) 80C-PO2 3/8) 80C-PO6 3/4) 80C-P12H	DSR	8-27-25
13	☐ Add special accessories after crimping/swaging		
14	☐ Perform and record burst test results, if applicable Remarks:		
15	☐ Air test, if applicable Test pressure Psi _____ Seconds _____ (Pass/Fail (Circle One)) Remarks:		
16	☒ Hydrostatic proof test Test pressure Psi 10,000 Seconds 30 (Pass/Fail (Circle One)) Remarks:	DSR	8-27-25
17	☒ Flush method water, and then air	DSR	8-27-25
18	☒ Perform and record conductivity test: Meter Megger Mit200 Hose resistance _____ (-) Electrode resistance 0.03 (=) Final hose resistance 0.03	DSR	8-27-25
19	☒ Final audit: Check boxes for items inspected, as applicable: Correct hose; Correct fittings; Correct customer PN	DSR	8-27-25
20	☒ Check swage or crimp diameters: 5CNG-4-58 .668/.688 5CNG-6-58 .785/.805 5CNG-8-58 .900/.920 5CNG-12-58 1.20/1.22	DSR	8-27-25
21	☒ Hose fittings crimped; ☒ 100% VISUAL INSPECT FOR THE FOLLOWING ☒ Presence of threads ☒ Air passes through assembly;	DSR	8-27-25
20	☒ Cap and package nose	DSR	8-27-25
21	☒ Certificate of Conformance for Materials Shipped (on back)	DSR	8-27-25

3

FITTING TYPE
01 NPT MALE
02 NPT FEMALE
03 JIC MALE
04 SAE 45 MALE
05 SAE O-RING STRAIGHT THREAD
06 JIC FEMALE SWIVEL
07 FEMALE PIPE SWIVEL

7

FITTING SIZE
4 1/4"
6 3/8"
8 1/2"
10 5/8"
12 3/4"

1

CG SERIES
HOSE SIZE
4 1/4"
6 3/8"
8 1/2"
12 3/4"

4

FITTING TYPE
01 NPT MALE
02 NPT FEMALE
03 JIC MALE
04 SAE 45 MALE
05 SAE O-RING STRAIGHT THREAD
06 JIC FEMALE SWIVEL
07 FEMALE PIPE SWIVEL


8

FITTING SIZE
4 1/4"
6 3/8"
8 1/2"
10 5/8"
12 3/4"

BREAK-AWAY OR
DISPENSER END

11 FILL HOSE LENGTH
24"

FILL END

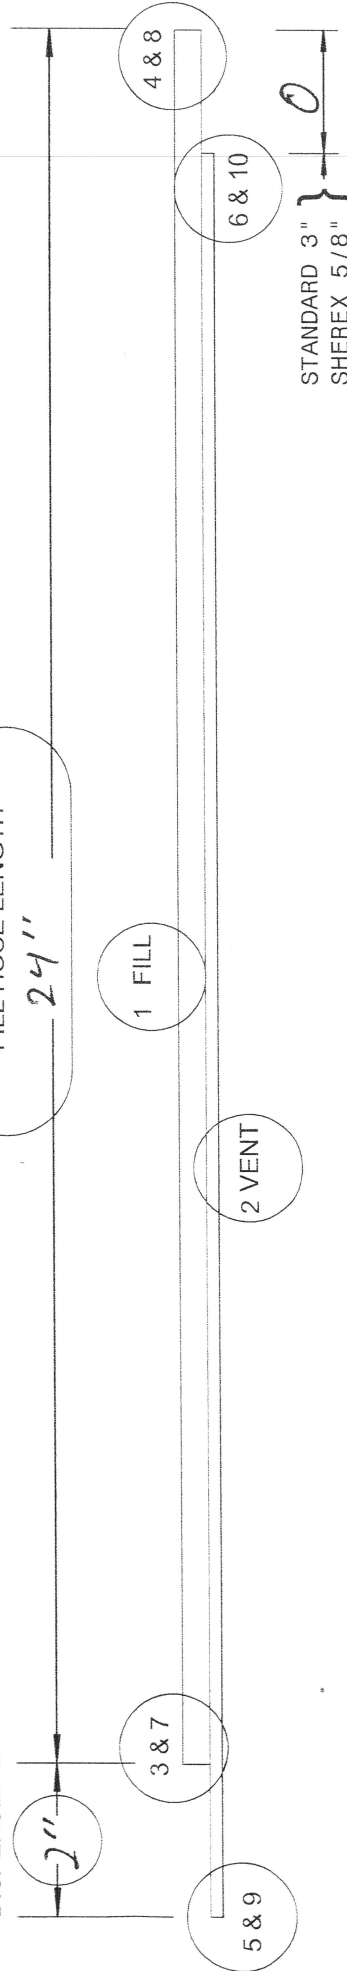

5

FITTING TYPE
01 NPT MALE
02 NPT FEMALE
03 JIC MALE
04 SAE 45 MALE
05 SAE O-RING STRAIGHT THREAD
06 JIC FEMALE SWIVEL
07 FEMALE PIPE SWIVEL

9

FITTING SIZE
2 1/8"
4 1/4"
6 3/8"

2

CG SERIES
HOSE SIZE
4 1/4"
6 3/8"

6

FITTING TYPE
01 NPT MALE
02 NPT FEMALE
03 JIC MALE
04 SAE 45 MALE
05 SAE O-RING STRAIGHT THREAD
06 JIC FEMALE SWIVEL
07 FEMALE PIPE SWIVEL

10

FITTING SIZE
2 1/8"
4 1/4"
6 3/8"

WORK ORDER # 661031825

5CNG 6/520N 4-05 06/01 06-68/24-24"

FILL HOSE		TUBS GAS TECHNOLOGIES, INC. 10117 EAST 7401 STREET TULSA, OK 74146	
DATE: 03/27/87	DESIGNED BY: C. SEWELL	918-665-2641 FAX: 918-665-2657	
DRAWN BY: C.P.S.	CHECKED BY:		
DWG. NO. 5CNG 5CNG	SCALE: NONE	SHEET NO. 01	REV. 1

Tulsa Gas Technologies, Inc.
4809 S. 101st. E. Ave.
Tulsa, OK 74146
918-665-2641

Work Order #
Customer Name
Customer PO
Date Required

GCT031825
Genesis Contracting Inc.
24-3603
7-22-23

ASSEMBLY/CERTIFICATION SHEET

		SIGN	DATE
1	☒ Review shop work order versus customer print and history	DSN	8-27-25
2	☒ Component part numbers: 105CG-6-6, 101CG-4-6 Pack dates and/or QC codes	DSN	8-27-25
3	☒ ID band num	DSN	8-27-25
4	☒ Hose Cut Length 90'	DSN	8-27-25
5	Pre-expansion of hose (if required) Size Remarks:	DSN	8-27-25
6	☒ Audit and mark appropriate insertion depth	DSN	8-27-25
7	Add special accessories Remarks:	DSN	8-27-25
8	☒ Apply danger tag and ID band	DSN	8-27-25
9	☒ Install bend restrictors Remarks:	DSN	8-27-25
10	☒ Assemble fittings; check insertion depth Remarks:	DSN	8-27-25
11	Set offset angle and/or orientation Remarks:	DSN	8-27-25
12	☒ Perform crimp or swage on product crimp set die using Parker Catalog 4660, page K58 1/2) 80C-PO8H 3/8) 80C-PO6H 1/4) 80C-PO4H 1/8) 80C-PO2 3/8) 80C-PO6 3/4) 80C-P12H	DSN	8-27-25
13	Add special accessories after crimping/swaging		
14	Perform and record burst test results, if applicable Remarks:		
15	Air test, if applicable Test pressure Psi _____ Seconds _____ Pass/Fail (Circle One) Remarks:		
16	☒ Hydrostatic proof test Test pressure Psi 10,000 Seconds 30 (Pass/Fail (Circle One)) Remarks:	DSN	8-27-25
17	☒ Flush method water, and then air	DSN	8-27-25
18	☒ Perform and record conductivity test: Meter Megger Mit200 Hose resistance 0.03 (-) Electrode resistance 0.03 (+) Final hose resistance 0.03	DSN	8-27-25
19	☒ Final audit: Check boxes for items inspected, as applicable. Correct hose; Correct fittings; Correct customer PN	DSN	8-27-25
20	☒ Check swage or crimp diameters: 5CNG-4-58 .668/.688 5CNG-6-58 .785/.805 5CNG-8-58 .900/.920 5CNG-6-55 .675/.695 5CNG-12-58 1.20/1.22	DSN	8-27-25
*****100% VISUAL INSPECT FOR THE FOLLOWING*****			
21	☒ Hose fittings crimped; ☒ Air passes through assembly;	DSN	8-27-25
	☒ Presence of threads	DSN	8-27-25
22	☒ Cap and package nose	DSN	8-27-25
23	☒ Certificate of Conformance for Materials Shipped on back	DSN	8-27-25

Tulsa Gas Technologies, Inc.
4809 S. 101st. E. Ave.
Tulsa, OK 74146
918-665-2641

Work Order #
Customer Name
Customer PO
Date Required

GCI031825
Genesis Contracting Inc.
24-3603
2-22-25

ASSEMBLY/CERTIFICATION SHEET

- | | | SIGN | DATE | | | | | | |
|---|--|---|---|---|-----------------------------|----------------------------|----------------------|-----|---------|
| 1 | ☒ Review shop work order versus customer print and history | OSK | 8-27-25 | | | | | | |
| 2 | ☒ Component part numbers: <u>105CG-6-6, 101CG-4-6</u>
Pack dates and/or QC codes | OSK | 8-27-25 | | | | | | |
| 3 | ☒ ID band number | OSK | 8-27-25 | | | | | | |
| 4 | ☒ Hose Cut Length <u>96"</u> | OSK | 8-27-25 | | | | | | |
| 5 | Pre-expansion of hose (if required) Size
Remarks: | OSK | 8-27-25 | | | | | | |
| 6 | ☒ Audit and mark appropriate insertion depth | OSK | 8-27-25 | | | | | | |
| 7 | Add special accessories
Remarks: | OSK | 8-27-25 | | | | | | |
| 8 | ☒ Apply danger tag and ID band | OSK | 8-27-25 | | | | | | |
| 9 | ☒ Install bend restrictors
Remarks: | OSK | 8-27-25 | | | | | | |
| 10 | ☒ Assemble fittings; check insertion depth
Remarks: | OSK | 8-27-25 | | | | | | |
| 11 | Set offset angle and/or orientation
Remarks: | OSK | 8-27-25 | | | | | | |
| 12 | ☒ Perform crimp or swage on product crimp set die using Parker Catalog 4660, page K58
<table border="0"><tr><td><u>1/2) 80C-PO8H</u></td><td><u>3/8) 80C-PO6H</u></td></tr><tr><td><u>1/4) 80C-PO4H</u></td><td><u>1/8) 80C-PO2</u></td></tr><tr><td><u>3/8) 80C-PO6</u></td><td><u>3/4) 80C-P12H</u></td></tr></table> | <u>1/2) 80C-PO8H</u> | <u>3/8) 80C-PO6H</u> | <u>1/4) 80C-PO4H</u> | <u>1/8) 80C-PO2</u> | <u>3/8) 80C-PO6</u> | <u>3/4) 80C-P12H</u> | OSK | 8-27-25 |
| <u>1/2) 80C-PO8H</u> | <u>3/8) 80C-PO6H</u> | | | | | | | | |
| <u>1/4) 80C-PO4H</u> | <u>1/8) 80C-PO2</u> | | | | | | | | |
| <u>3/8) 80C-PO6</u> | <u>3/4) 80C-P12H</u> | | | | | | | | |
| 13 | Add special accessories after crimping/swaging | | | | | | | | |
| 14 | Perform and record burst test results, if applicable
Remarks: | | | | | | | | |
| 15 | Air test, if applicable
Test pressure Psi _____ Seconds _____ Pass/Fail (Circle One)
Remarks: | | | | | | | | |
| 16 | ☒ Hydrostatic proof test
Test pressure Psi <u>10,000</u> Seconds <u>30</u> <u>(Pass)</u> Fail (Circle One)
Remarks: | OSK | 8-27-25 | | | | | | |
| 17 | ☒ Flush method water, and then air | OSK | 8-27-25 | | | | | | |
| 18 | ☒ Perform and record conductivity test: Meter _____ Megger Mit200
Hose resistance <u>0.03</u> (-) Electrode resistance <u>0.03</u>
(=) Final hose resistance <u>0.03</u> | OSK | 8-27-25 | | | | | | |
| 19 | ☒ Final audit: Check boxes for items inspected, as applicable:
<table border="0"><tr><td>☒ Correct hose;</td><td>☒ Correct fittings;</td><td>☒ Correct customer PN</td></tr></table> | ☒ Correct hose; | ☒ Correct fittings; | ☒ Correct customer PN | OSK | 8-27-25 | | | |
| ☒ Correct hose; | ☒ Correct fittings; | ☒ Correct customer PN | | | | | | | |
| 20 | ☒ Check swage or crimp diameters:
<table border="0"><tr><td><u>5CNG-4-58 .668/.688</u></td><td><u>5CNG-8-58 .900/.920</u></td></tr><tr><td><u>5CNG-6-58 .785/.805</u></td><td><u>5CNG-12-58 1.20/1.22</u></td></tr><tr><td><u>5CNG-6-55 .675/.695</u></td><td></td></tr></table> | <u>5CNG-4-58 .668/.688</u> | <u>5CNG-8-58 .900/.920</u> | <u>5CNG-6-58 .785/.805</u> | <u>5CNG-12-58 1.20/1.22</u> | <u>5CNG-6-55 .675/.695</u> | | OSK | 8-27-25 |
| <u>5CNG-4-58 .668/.688</u> | <u>5CNG-8-58 .900/.920</u> | | | | | | | | |
| <u>5CNG-6-58 .785/.805</u> | <u>5CNG-12-58 1.20/1.22</u> | | | | | | | | |
| <u>5CNG-6-55 .675/.695</u> | | | | | | | | | |
| 21 | ☒ Hose fittings crimped; ☒ 100% VISUAL INSPECT FOR THE FOLLOWING
☒ Presence of threads ☒ Air passes through assembly; | OSK | 8-27-25 | | | | | | |
| 20 | ☒ Cap and package nose | OSK | 8-27-25 | | | | | | |
| 21 | ☒ Certificate of Conformance for Materials Shipped (on back) | OSK | 8-27-25 | | | | | | |

3

FITTING TYPE

01 NPT MALE

02 NPT FEMALE

03 JIC MALE

04 SAE 45 MALE

05 SAE O-RING STRAIGHT THREAD

06 JIC FEMALE SWIVEL

07 FEMALE PIPE SWIVEL

7

FITTING SIZE

4 1/4"

6 3/8"

8 1/2"

10 5/8"

12 3/4"

1

CG SERIES

HOSE SIZE

4 1/4"

6 3/8"

8 1/2"

12 3/4"

4

FITTING TYPE

01 NPT MALE

02 NPT FEMALE

03 JIC MALE

04 SAE 45 MALE

05 SAE O-RING STRAIGHT THREAD

06 JIC FEMALE SWIVEL

07 FEMALE PIPE SWIVEL

8

FITTING SIZE

4 1/4"

6 3/8"

8 1/2"

10 5/8"

12 3/4"

BREAK-AWAY OR

DISPENSER END

11 FILL HOSE LENGTH

96"

FILL END

2"

3 & 7

5 & 9

1 FILL

2 VENT

6 & 10

4 & 8

STANDARD 3" SHEREX 5/8" 3"

5

FITTING TYPE

01 NPT MALE

02 NPT FEMALE

03 JIC MALE

04 SAE 45 MALE

05 SAE O-RING STRAIGHT THREAD

06 JIC FEMALE SWIVEL

07 FEMALE PIPE SWIVEL

9

FITTING SIZE

2 1/8"

4 1/4"

6 3/8"

2

CG SERIES

HOSE SIZE

4 1/4"

6 3/8"

6

FITTING TYPE

01 NPT MALE

02 NPT FEMALE

03 JIC MALE

04 SAE 45 MALE

05 SAE O-RING STRAIGHT THREAD

06 JIC FEMALE SWIVEL

07 FEMALE PIPE SWIVEL

10

FITTING SIZE

2 1/8"

4 1/4"

6 3/8"

WORK ORDER # 91031825

5CNG6/520N4-0501/0106-64/24-96

11

9

10

8

7

6

5

4

3

2

1

0

9

8

7

6

5

4

3

2

1

101 SA GAS TECHNOLOGIES, INC.
10117 EAST 40TH STREET
LUTSA, OK 74106

918-665-2641 FAX: 918-665-2657

DESIGNED BY: C. SEWELL
DRAWN BY: C.R.S.

CHECKED BY:
SCALE: NONE
SHEET NO. OF
REV. 1

FILL HOSE

DATE: 03/27/07

DESIGNED BY: C. SEWELL

DWG. NO. FILLHOSE 5CNG 5CNG