

CERTIFICATE OF CONFORMANCE  
FOR  
MATERIALS SHIPPED

Tulsa Gas Technologies, Inc. (TGT) hereby certifies that all materials in the manufacture of hoses on SN 22081334 conform to the

material and/or manufacturing specifications indicated in drawings, bulletins or specifications as called for on the said purchase order. Test reports are on file with us or with our suppliers for examination and indicate conformance with applicable specification requirements. In production items listed, no direct contact was made with mercury, any of its compounds or with any mercury containing devices employing a single boundary for containment. Tulsa Gas Technologies, Inc. also certifies that the parts listed and shipped on the date indicated are manufactured in accordance with Parker specifications and quality standards, if applicable, as stated on the drawings or specifications called for on said purchase order. All parts and test conform to AGA I-93.

SIGNED BY: C. R. Wendt  
TITLE: Assembly  
DATE: 10-24-22

Tulsa Gas Technologies, Inc.  
 4809 S. 101st. E. Ave.  
 Tulsa, OK 74146  
 918-665-2641

Disp. Serial # 22081334  
 Customer Name TRILLIUM  
 Customer PO N/A  
 Date Required 10/24/2022

ASSEMBLY/CERTIFICATION SHEET

		SIGN	DATE
1	<input checked="" type="checkbox"/> Review shop work order versus customer print and history	<u>ck</u>	<u>10/24/2022</u>
2	<input checked="" type="checkbox"/> Component part numbers: _____ W/OTRIL0821C Pack dates and/or QC codes _____ 5215200803	<u>ck</u>	<u>10/24/2022</u>
3	<input checked="" type="checkbox"/> ID band number _____ 5CNG12/5CNG6/0506-1212/66-36"	<u>ck</u>	<u>10/24/2022</u>
4	<input checked="" type="checkbox"/> Hose Cut Length _____ 36"	<u>ck</u>	<u>10/6/2022</u>
5	Pre-expansion of hose (if required) Size _____ Remarks: _____		
6	<input checked="" type="checkbox"/> Audit and mark appropriate insertion depth	<u>ck</u>	<u>10/24/2022</u>
7	Add special accessories _____ Remarks: _____		
8	<input checked="" type="checkbox"/> Apply danger tag and ID band		
9	<input checked="" type="checkbox"/> Install bend restrictors Remarks: _____	<u>ck</u>	<u>10/24/2022</u>
10	<input checked="" type="checkbox"/> Assemble fittings; check insertion depth Remarks: _____	<u>ck</u>	<u>10/24/2022</u>
11	Set offset angle and/or orientation Remarks: _____		
12	<input checked="" type="checkbox"/> Perform crimp or swage on product/crimp set die-using Parker Catalog 4660, page K58 _____ 1/2) 80C-PO8H _____ 3/8) 80C-PO6H _____ 1/4) 80C-PO4H _____ 1/2) 80C-PO2 _____ 3/8) 80C-PO6 _____ X 3/4) 80C-P12H	<u>ck</u>	<u>10/24/2022</u>
13	Add special accessories after crimping/swaging _____		
14	Perform and record burst test results, if applicable Remarks: _____		
15	Air test, if applicable Test pressure Psi _____ Seconds _____; Pass/Fail (Circle One) Remarks: _____	<u>ck</u>	<u>10/24/2022</u>
16	<input checked="" type="checkbox"/> Hydrostatic proof test Test pressure Psi <u>10,000</u> Seconds <u>30</u> ; <u>Pass</u> /Fail (Circle One) Remarks: <u>Passed Pressure Test</u>	<u>ck</u>	<u>10/24/2022</u>
17	<input checked="" type="checkbox"/> Flush method water, and then air	<u>ck</u>	<u>10/24/2022</u>
18	<input checked="" type="checkbox"/> Perform and record conductivity test; Meter _____ Megger Mit200 Hose resistance _____ (-) Electrode resistance _____ 0.001 0.001	<u>ck</u>	<u>10/24/2022</u>
19	<input checked="" type="checkbox"/> Final audit: Check boxes for items inspected, as applicable: <input checked="" type="checkbox"/> Correct hose; <input checked="" type="checkbox"/> Correct fittings; <input checked="" type="checkbox"/> Correct customer PN Check swage or crimp diameters: _____ 5CNG-4-55 .580+-.05 _____ 5CNG-4-58 .785/.805 _____ 5CNG-8-58 .900/.920 _____ 5CNG-6-55 .675/.695 <input checked="" type="checkbox"/> _____ 5CNG-12-58 1.20/1.22 *****100% VISUAL INSPECT FOR THE FOLLOWING***** <input checked="" type="checkbox"/> Hose fittings crimped; <input checked="" type="checkbox"/> Air passes through assembly; <input checked="" type="checkbox"/> Presence of threads	<u>ck</u>	<u>10/24/2022</u>
20	<input checked="" type="checkbox"/> Cap and package hose	<u>ck</u>	
21	<input checked="" type="checkbox"/> Certificate of Conformance for Materials Shipped (on back)	<u>ck</u>	<u>10/24/2022</u>

- 3**
- |                               |              |
|-------------------------------|--------------|
| FITTING TYPE                  | FITTING SIZE |
| 01 NPT MALE                   | 4 1/4"       |
| 02 NPT FEMALE                 | 6 3/8"       |
| 03 JIC MALE                   | 8 1/2"       |
| 04 SAE 45 MALE                | 10 5/8"      |
| 05 SAE O-RING STRAIGHT THREAD | 12 3/4"      |
| 06 JIC FEMALE SWIVEL          |              |
| 07 FEMALE PIPE SWIVEL         |              |

- 1**
- |                     |
|---------------------|
| 58 SERIES HOSE SIZE |
| 4 1/4"              |
| 6 3/8"              |
| 8 1/2"              |
| 12 3/4"             |


- 4**
- |                               |              |
|-------------------------------|--------------|
| FITTING TYPE                  | FITTING SIZE |
| 01 NPT MALE                   | 4 1/4"       |
| 02 NPT FEMALE                 | 6 3/8"       |
| 03 JIC MALE                   | 8 1/2"       |
| 04 SAE 45 MALE                | 12 3/4"      |
| 05 SAE O-RING STRAIGHT THREAD |              |
| 06 JIC FEMALE SWIVEL          |              |
| 07 FEMALE PIPE SWIVEL         |              |

- 8**
- |                |              |
|----------------|--------------|
| FITTING TYPE   | FITTING SIZE |
| 01 NPT MALE    | 4 1/4"       |
| 02 NPT FEMALE  | 6 3/8"       |
| 03 JIC MALE    | 8 1/2"       |
| 04 SAE 45 MALE | 12 3/4"      |

BREAK-AWAY OR DISPENSER END

11 FILL HOSE LENGTH  
36'

FILL END

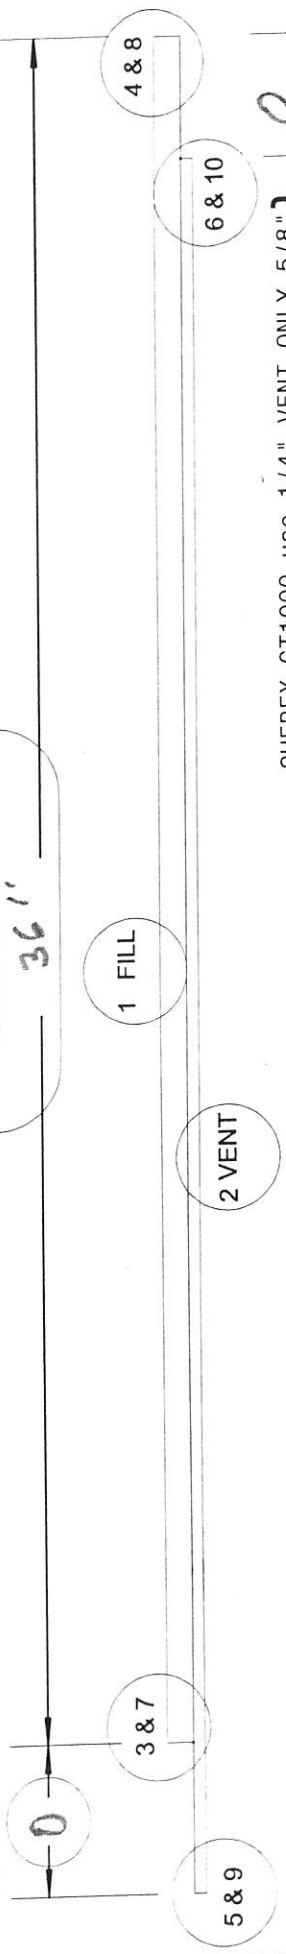

SHEREX CT1000 use 1/4" VENT ONLY 5/8" SHEREX CT5000 use 3/8" VENT ONLY

- 5**
- |                               |              |
|-------------------------------|--------------|
| FITTING TYPE                  | FITTING SIZE |
| 01 NPT MALE                   | 2 1/8"       |
| 02 NPT FEMALE                 | 4 1/4"       |
| 03 JIC MALE                   | 6 3/8"       |
| 04 SAE 45 MALE                |              |
| 05 SAE O-RING STRAIGHT THREAD |              |
| 06 JIC FEMALE SWIVEL          |              |
| 07 FEMALE PIPE SWIVEL         |              |

- 2**
- |                     |
|---------------------|
| 55 SERIES HOSE SIZE |
| 2 1/8"              |
| 4 1/4"              |
| 6 3/8"              |

- 6**
- |                               |              |
|-------------------------------|--------------|
| FITTING TYPE                  | FITTING SIZE |
| 01 NPT MALE                   | 2 1/8"       |
| 02 NPT FEMALE                 | 4 1/4"       |
| 03 JIC MALE                   | 6 3/8"       |
| 04 SAE 45 MALE                |              |
| 05 SAE O-RING STRAIGHT THREAD |              |
| 06 JIC FEMALE SWIVEL          |              |
| 07 FEMALE PIPE SWIVEL         |              |

- 10**
- |               |              |
|---------------|--------------|
| FITTING TYPE  | FITTING SIZE |
| 01 NPT MALE   | 2 1/8"       |
| 02 NPT FEMALE | 4 1/4"       |
| 03 JIC MALE   | 6 3/8"       |

WORK ORDER # TRIL110821C

5CNG12/5CNG10-0606/0506-1212/66-36

**FILL HOSE**

TULSA GAS TECHNOLOGIES, INC.  
10117 EAST 48TH STREET  
TULSA, OK 74146  
918-665-2641 FAX: 918-665-2657

DATE: 03/27/97  
DESIGNED BY: C. SEWELL  
DRAWN BY: C.R.S.  
SCALE: NONE  
DWG. NO. FILLHOSE 5CNG 5CNG  
SHEET NO. OF  
REV. 1


CERTIFICATE OF CONFORMANCE  
FOR  
MATERIALS SHIPPED

Tulsa Gas Technologies, Inc. (TGT) hereby certifies that all materials in the manufacture of hoses on SN 22081334 conform to the

material and/or manufacturing specifications indicated in drawings, bulletins or specifications as called for on the said purchase order. Test reports are on file with us or with our suppliers for examination and indicate conformance with applicable specification requirements. In production items listed, no direct contact was made with mercury, any of its compounds or with any mercury containing devices employing a single boundary for containment. Tulsa Gas Technologies, Inc. also certifies that the parts listed and shipped on the date indicated are manufactured in accordance with Parker specifications and quality standards, if applicable, as stated on the drawings or specifications called for on said purchase order. All parts and test conform to AGA I-93.

SIGNED BY: C.R. Kendall  
TITLE: Assembly  
DATE: 10-24-27

- 3** FITTING TYPE  
01 NPT MALE  
02 NPT FEMALE  
03 JIC MALE  
04 SAE 45 MALE  
05 SAE O-RING STRAIGHT THREAD  
06 JIC FEMALE SWIVEL  
07 FEMALE PIPE SWIVEL
- 7** FITTING SIZE  
4 1/4"  
6 3/8"  
8 1/2"  
10 5/8"  
12 3/4"
- 1** 58 SERIES  
HOSE SIZE  
4 1/4"  
6 3/8"  
8 1/2"  
12 3/4"
- 4** FITTING TYPE  
01 NPT MALE  
02 NPT FEMALE  
03 JIC MALE  
04 SAE 45 MALE  
05 SAE O-RING STRAIGHT THREAD  
06 JIC FEMALE SWIVEL  
07 FEMALE PIPE SWIVEL
- 8** FITTING SIZE  
4 1/4"  
6 3/8"  
8 1/2"  
12 3/4"

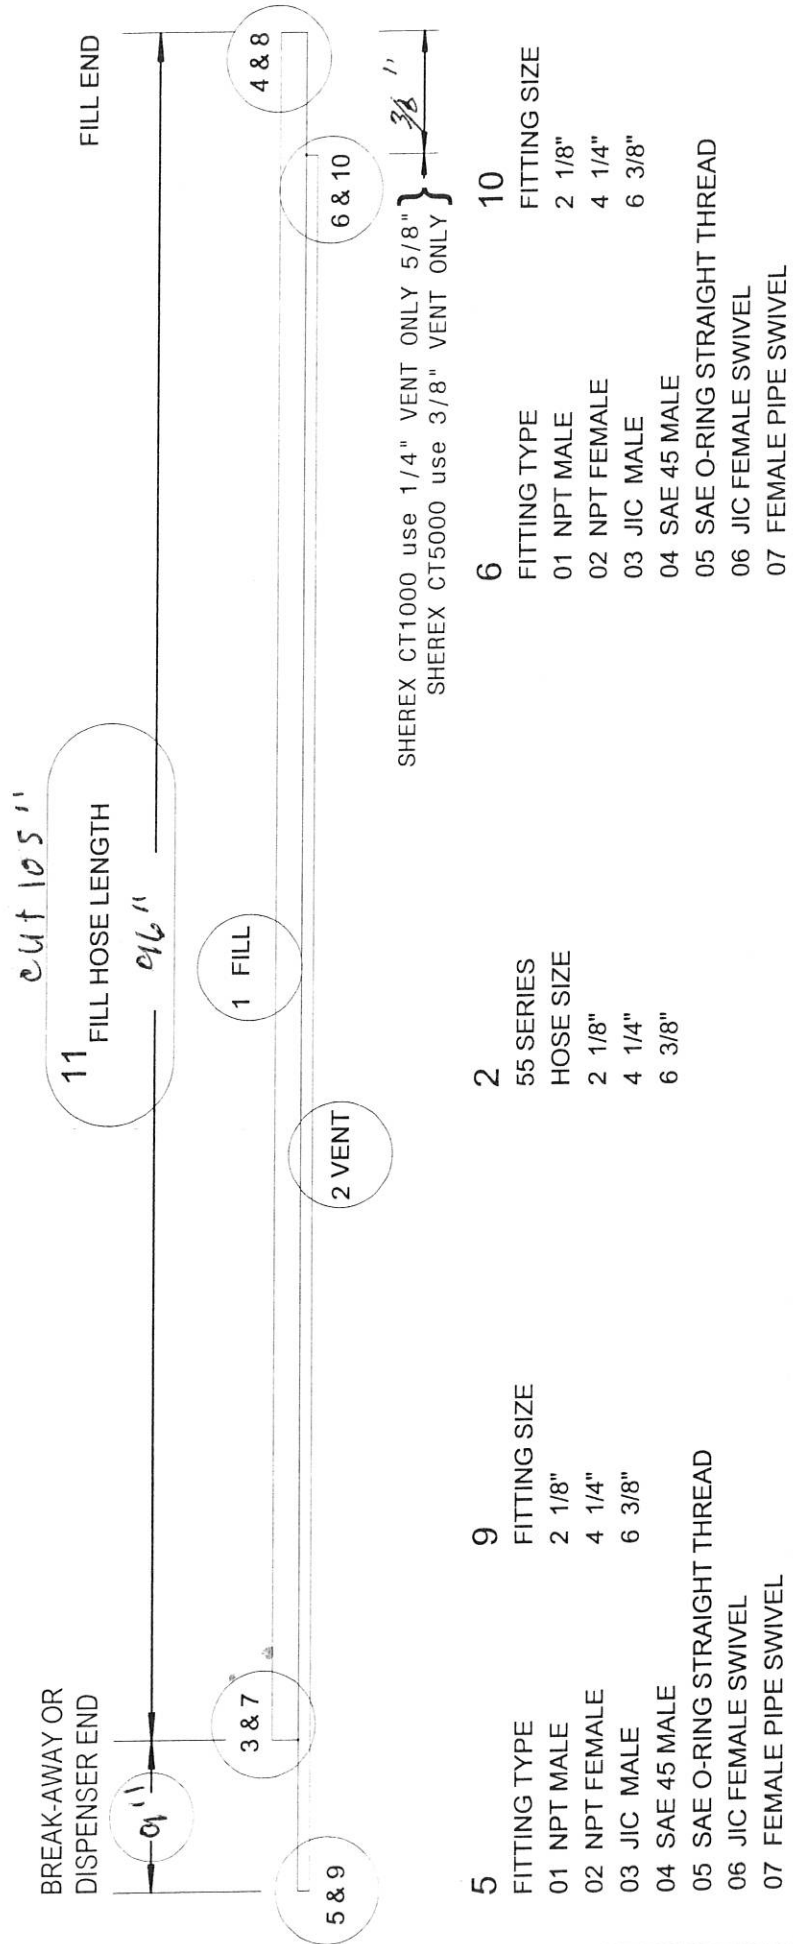

SHEREX CT1000 use 1/4" VENT ONLY 5/8"  
SHEREX CT5000 use 3/8" VENT ONLY

- 5** FITTING TYPE  
01 NPT MALE  
02 NPT FEMALE  
03 JIC MALE  
04 SAE 45 MALE  
05 SAE O-RING STRAIGHT THREAD  
06 JIC FEMALE SWIVEL  
07 FEMALE PIPE SWIVEL
- 9** FITTING SIZE  
2 1/8"  
4 1/4"  
6 3/8"
- 2** 55 SERIES  
HOSE SIZE  
2 1/8"  
4 1/4"  
6 3/8"
- 6** FITTING TYPE  
01 NPT MALE  
02 NPT FEMALE  
03 JIC MALE  
04 SAE 45 MALE  
05 SAE O-RING STRAIGHT THREAD  
06 JIC FEMALE SWIVEL  
07 FEMALE PIPE SWIVEL
- 10** FITTING SIZE  
2 1/8"  
4 1/4"  
6 3/8"

WORK ORDER # **TRIL 110821C**

**5CNG** 1 2 3 4 5 6 7 8 9 10 11  
1/4/5CNG 06 06 05 06 12 12 12 12 12 12 12

**FILL HOSE**

TULSA GAS TECHNIQ OILES, INC  
10117 EAST 48TH STREET  
TULSA, OK 74148  
918 665-2641 FAX: 918 665-2657

DATE: 03/27/87  
DESIGNED BY: C. SEWELL  
DRAWN BY: C.R.S.  
CHECKED BY:  
SCALE: NONE

DWG. NO. FILLHOSE 5CNG 5CNG SHEET NO. OF REV. 1

Tulsa Gas Technologies, Inc.  
 4809 S. 101st. E. Ave.  
 Tulsa, OK 74146  
 918-665-2641

Disp. Serial # 22081334  
 Customer Name TRILLIUM  
 Customer PO N/A  
 Date Required 10/24/2022

ASSEMBLY/CERTIFICATION SHEET

		SIGN	DATE
1	<input checked="" type="checkbox"/> Review shop work order versus customer print and history	<u>CK</u>	<u>10/24/2022</u>
2	<input checked="" type="checkbox"/> Component part numbers: _____ W/OTRIL0821C Pack dates and/or QC codes _____ 5211134312	<u>CK</u>	<u>10/24/2022</u>
3	<input checked="" type="checkbox"/> ID band number _____ 5CNG12/5CNG6/0506-1212/66-96"	<u>CK</u>	<u>10/24/2022</u>
4	<input checked="" type="checkbox"/> Hose Cut Length _____ 96"	<u>CK</u>	<u>10/6/2022</u>
5	Pre-expansion of hose (if required) Size _____ Remarks: _____		
6	<input checked="" type="checkbox"/> Audit and mark appropriate insertion depth	<u>CK</u>	<u>10/24/2022</u>
7	Add special accessories _____ Remarks: _____		
8	<input checked="" type="checkbox"/> Apply danger tag and ID band		
9	<input checked="" type="checkbox"/> Install bend restrictors Remarks: _____	<u>CK</u>	<u>10/24/2022</u>
10	<input checked="" type="checkbox"/> Assemble fittings; check insertion depth Remarks: _____	<u>CK</u>	<u>10/24/2022</u>
11	Set offset angle and/or orientation Remarks: _____		
12	<input checked="" type="checkbox"/> Perform crimp or swage on product/crimp set die-using Parker Catalog 4660, page K58 _____ 1/2) 80C-PO8H _____ 3/8) 80C-PO6H _____ 1/4) 80C-PO4H _____ 1/2) 80C-PO2 _____ 3/8) 80C-PO6 _____ X 3/4) 80C-P12H	<u>CK</u>	<u>10/24/2022</u>
13	Add special accessories after crimping/swaging	<u>CK</u>	
14	Perform and record burst test results, if applicable Remarks: _____		
15	Air test, if applicable Test pressure Psi _____ Seconds _____ ; Pass/Fail (Circle One) Remarks: _____	<u>CK</u>	<u>10/24/2022</u>
16	<input checked="" type="checkbox"/> Hydrostatic proof test Test pressure Psi <u>10,000</u> Seconds <u>30</u> ; (Pass/Fail (Circle One) Remarks: <u>Passed Pressure Test</u>	<u>CK</u>	<u>10/24/2022</u>
17	<input checked="" type="checkbox"/> Flush method water, and then air	<u>CK</u>	<u>10/24/2022</u>
18	<input checked="" type="checkbox"/> Perform and record conductivity test; Meter _____ Megger Mit200 Hose resistance _____ (-) Electrode resistance _____ 0.03	<u>CK</u>	<u>10/24/2022</u>
19	<input checked="" type="checkbox"/> Final audit: Check boxes for items inspected, as applicable: <input checked="" type="checkbox"/> Correct hose; <input checked="" type="checkbox"/> Correct fittings; <input checked="" type="checkbox"/> Correct customer PN Check swage or crimp diameters: _____ 5CNG-4-55 .580+-.05 _____ 5CNG-4-58 .785/.805 _____ 5CNG-8-58 .900/.920 _____ 5CNG-6-55 .675/.695 <input checked="" type="checkbox"/> _____ 5CNG-12-58 1.20/1.22	<u>CK</u>	<u>10/24/2022</u>
	*****100% VISUAL INSPECT FOR THE FOLLOWING*****		
	<input checked="" type="checkbox"/> Hose fittings crimped; <input checked="" type="checkbox"/> Air passes through assembly; <input checked="" type="checkbox"/> Presence of threads	<u>CK</u>	<u>10/24/2022</u>
20	<input checked="" type="checkbox"/> Cap and package hose	<u>CK</u>	
21	<input checked="" type="checkbox"/> Certificate of Conformance for Materials Shipped (on back)	<u>CK</u>	<u>10/24/2022</u>