

## Model G2 Pressure Transducer



### APPLICATIONS

The G2 pressure transducer combines performance with value to meet the demanding needs of the original equipment manufacturer in applications found in:

- Off-road Equipment
- Construction Machinery
- Performance Racing
- Railroad/Transportation
- Compressor Control
- HVAC and Refrigeration
- Agricultural Implements
- Process Automation and Control
- Hydraulic & Pneumatic Sensing
- Pump Monitoring


### FEATURES

- 1% Total Error Band Accuracy
- Broad Temperature Capability
- All-welded pressure construction
- High EMI/RFI rating
- Ranges 30 psi through 20,000 psi
- IP 67 Ingress rating
- Diagnostic rails

The Ashcroft® Type G2<sup>+</sup> pressure transducer has been specifically designed with the high volume OEM in mind.

A ±1% Total Error Band accuracy is accomplished by marrying a high performance ASIC to a very stable, field proven polysilicon thin film pressure sensor. The sensor is electron beam welded to a pressure fitting of stainless steel, which provides excellent overpressure capability and outstanding durability in the presence of shock and vibration.

The circuitry is held within an internal cage and housed in an enclosure of reinforced Nylon.

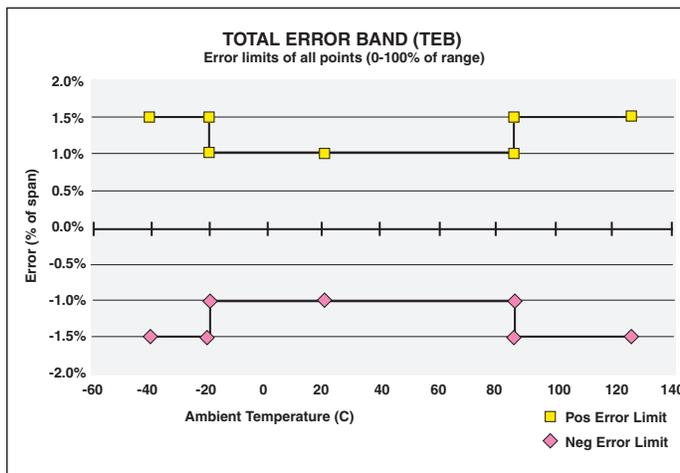

### PERFORMANCE SPECIFICATIONS

Ref. Condition 21°C ±1°C (72°F ±2°F)

#### Accuracy:

Total Error Band includes combined effects of temperature, non-linearity (Terminal Point Method), hysteresis, non repeatability, zero offset and span setting errors  
**±1% of Span:** From -20 to 85°C (-4 to 185°F)

**±1.5% of Span:** From -40 to -20°C (-40 to -4°F)

**±1.5% of Span:** From 85 to 125°C (185 to 257°F)

**Note:** Static accuracy ±0.25% of span BFLS (Best Fit Straight Line Method); includes non-linearity, hysteresis and non-repeatable effects at reference temperature 72°F (21°C)

**Stability:** Less than ±0.25% span/year

**Durability:** Tested to 50 million cycles

### ENVIRONMENTAL SPECIFICATIONS

#### Temperature:

Compensated -40 to 125°C (-40 to 257°F)

Operating -40 to 125°C (-40 to 257°F)

Storage -40 to 125°C (-40 to 257°F)

**Humidity:** 0 to 100% R.H., no effect

### FUNCTIONAL SPECIFICATIONS

Select from over 25 pressure ranges starting at 30 psi and running through 20,000 psi gauge.

Compound (vacuum & pressure) ranges are also available, see "To Order" on back.

#### Overpressure (F.S.): Proof Burst

750 psi & below 200% F.S. 1000% F.S.

1500 psi 200% F.S. 500% F.S.

3000 psi 200% F.S. 500% F.S.

5000 psi 150% F.S. 500% F.S.

7500 psi 120% F.S. 500% F.S.

10,000 psi 120% F.S. 240% F.S.

20,000 psi 120% F.S. 240% F.S.

**Vibration:** Random vibration (20 g) over temperature range (-40° to 125°C). Exceeds typical MIL-STD. requirements

**Shock:** 100gs, 6 ms

**Drop Test:** Withstands 1 meter on concrete 3 axis

**Response Time:** Less than 1 msec

**Warm-up Time:** Less than 500 msec typical

**Position Effect:** Less than ±0.01% span, typical

### ELECTRICAL SPECIFICATIONS

#### Output Signals Available:

Voltage Output	Excitation	Supply Current
0-5 Vdc, 3 wire	9-36 Vdc	5mA
0-10 Vdc, 3 wire	14-36 Vdc	5mA
1-5 Vdc, 3 wire	9-36 Vdc	4mA
1-6 Vdc, 3 wire	9-36 Vdc	4mA
0.5-4.5Vdc, 3 wire	9-36Vdc	4mA

#### Ratiometric Output:

0.5-4.5 Vdc, 3 wire 5 Vdc ±0.5 Vdc 3.5mA

#### Current Output:

4-20mA, 2 wire 9-36 Vdc

**Reverse Polarity & Miswired Protected:** Yes

**Insulation Breakdown Voltage:** 100 Vac

**Insulation Resistance:** Greater than 100 megohms at 100 Vdc

**CE Compliance:** Per EN 61326: 1997+ A1: 1998 + A2: 2001, Annex A (Heavy Industrial)

## Model G2 Pressure Transducer

### PHYSICAL SPECIFICATIONS

**Wetted Materials:** 304SS pressure connection and 17-4PH SS sensor diaphragm

**Housing:** 20% Glass Reinforced Nylon, Fire retardant to UL94 V1

**Available Process Connections (Male):**

See "How To Order" section below. For other connections consult factory.



**Ingress Rating:**

- IP67, NEMA 4X:
  - Metri-Pack I50 series\*
  - Shielded cable
  - Flying leads
  - Deutsch DT Series DT04-3P
  - Deutsch DTM Series DTM04-3P
  - AMP Superseal
- IP65, NEMA 4X:
  - Hirschmann G series\*\*

### ELECTRICAL TERMINATION

See "How To Order" section below for electrical termination options.

### DIMENSIONS

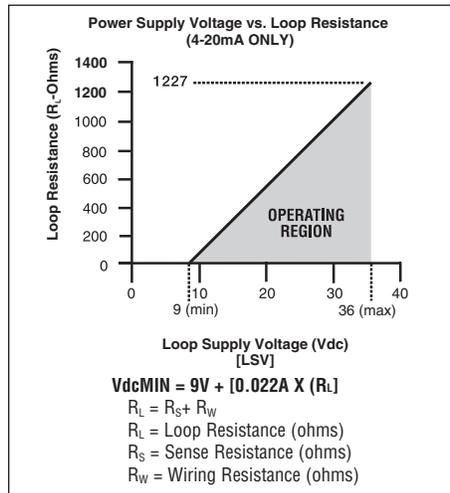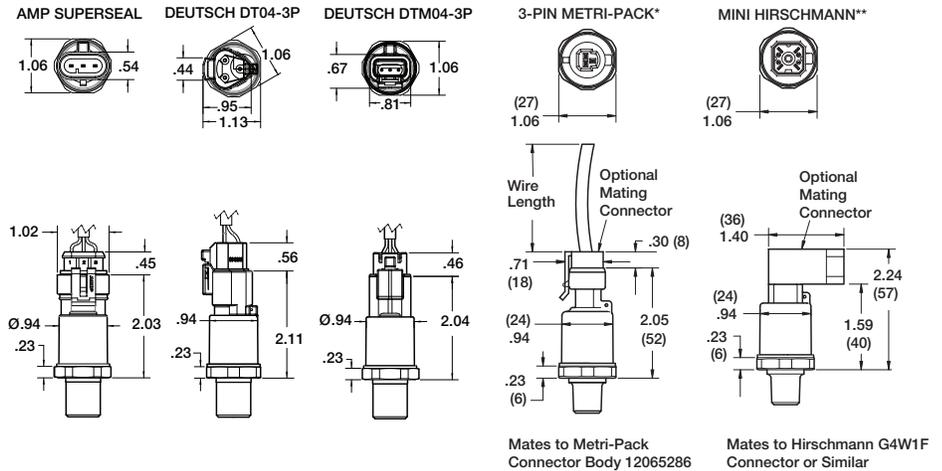

### How To Order

<b>G 2</b>	<b>7</b>	□ □ □ □	□ □	□ □	□ □ □ □ □ □ □ □	□	<b>X</b> □ □
<b>Type Configuration (G2)</b>	<b>Accuracy</b>	<b>Output Signal</b>	<b>Electrical Termination</b>	<b>Pressure Ranges</b>	<b>Measurement Type</b>	<b>Optional X-Variations</b>	
	1.0% Total Error Band -20°C/+85°C 1.5% Total Error Band -40°C/-20°C, 85/125°C	05 = 0-5 Vdc 10 = 0-10 Vdc 15 = 1-5 Vdc 16 = 1-6 Vdc 42 = 4-20mA 45 = 0.5-4.5Vdc 9-36Vdc supply RM = 0.5-4.5 Vdc Ratio Metric to 5Vdc supply	<b>Metri-Pack*</b> GN = no mating conn. G2 = mating conn. 3' cable G3 = mating conn. 10' cable G1 = mating conn. w/customer specified length <b>Hirschmann G Series**</b> HM = no mating conn. M1 = with mating conn. no cable M2 = mating conn. 3' cable P9 = mating conn. w/customer specified length <b>Flying Leads</b> W2 = 3' flying leads W9 = customer specified length <b>Shielded Cable</b> F2 = 3' shielded cable F3 = 10' shielded cable P1 = customer specified length	<b>Deutsch DT Series DT04-3P</b> DT = w/out mating conn. T2 = w/1m, 3' cable T3 = w/3m, 10' cable T1 = w/mating conn. cable customer defined length <b>Deutsch DTM Series DTM04-3P</b> DS = w/out mating conn. S2 = w/1m, 3' cable S3 = w/3m, 10' cable S1 = w/mating conn. cable customer defined length <b>AMP Superseal</b> AP = w/out mating conn. A2 = w/1m, 3' cable A3 = w/3m, 10' cable A1 = w/mating conn. cable customer defined length	G = Gauge Pressure	Consult Factory for Available Options	
		<b>Pressure Connection</b> M01 1/8 NPT-male M02 1/4 NPT-male MEK 1/4-20 SAE-male w/Buna-N O-ring M38 3/4-24 SAE-male w/Buna-N O-ring MEV 3/8-18 SAE-male w/Buna-N O-ring M33 3/4-24 UNJF3A (w/37° cone seat) M76 1/4-20 UNJF-3A (w/37° cone seat) MS2 1/4-19 bsp male MG2 1/4 B male		<b>psi Ranges</b> 30# = 30 psi 50# = 50 psi 60# = 60 psi 100# = 100 psi 150# = 150 psi 200# = 200 psi 300# = 300 psi 400# = 400 psi 500# = 500 psi 750# = 750 psi 1000# = 1000 psi 1500# = 1500 psi 2000# = 2000 psi 3000# = 3000 psi 4000# = 4000 psi 5000# = 5000 psi 6000# = 6000 psi 7500# = 7500 psi 10000# = 10000 psi 15000# = 15000 psi 20000# = 20000 psi		<b>Compound Ranges</b> 30#&vac = 30 psi/-14.7 psi 45#&vac = 45 psi/-14.7 psi 60#&vac = 60 psi/-14.7 psi 85#&vac = 85 psi/-14.7 psi 100#&vac = 100 psi/-14.7 psi 150#&vac = 150 psi/-14.7 psi 200#&vac = 200 psi/-14.7 psi 300#&vac = 300 psi/-14.7 psi	
		Consult factory for other connections	*Metri-Pack is a trademark of Delphi Packard Electric Systems. **Trademark of Richard Hirschmann of America, Inc.				