




GF Series — For Natural & Propane Gas




- **Safety** – Valve on coupler half will automatically shut off gas flow instantly when coupling is disconnected and automatically open on connection. Snap-tite's GF Series incorporates a safety fuse in the nipple to automatically shut off the gas supply to your gas appliance once temperatures exceed 350°F (177°C).
- **Size** – Available in sizes 1/4" through 1-1/4".
- **Construction** – GF series couplings are of brass construction.
- **Certified** – Snap-tite GF Series is certified by the Canadian Standards Association to meet ANSI Z21.41-1998 and CSA 6.9-M98 standards. This certification is for use with natural, manufactured and mixed gas, liquified petroleum and LP gas mixtures.
- **Dust caps and plugs** – Plastic dust caps for nipples and dust plugs for couplers are available to keep out dirt and grease when couplings are not in use.


Snap-tite fusible link protects against unwanted gas-fed fires.

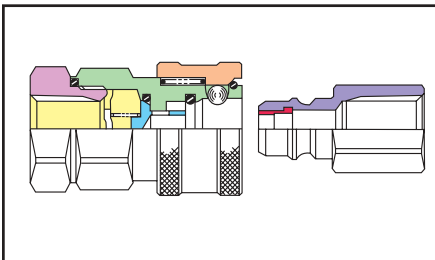

Disconnected: Valve in coupler shuts gas off (OD valve should not be the only means to shut gas supply off over an extended period of time. A gas shut-off valve should be installed before the coupler for extended periods).

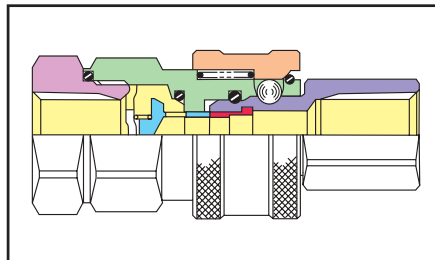

Connected: Valve opens allowing free flow of gas.

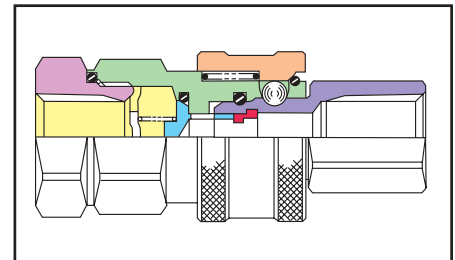

Valve automatically closes when temperature exceeds 350°F (177°C), thus preventing a gas-supported fire.

How to Order

To order, simply give the part number noted below for the size of gas line you will be connecting to. Gas units are sold as sets consisting of a valve coupler and a plain nipple with fusible link.

Size	Coupler	Nipple
1/4"	BVGFC4-4F	BPGFN4-4F
3/8"	BVGFC6-6F	BPGFN6-6F
1/2"	BVGFC8-8F	BPGFN8-8F
3/4"	BVGFC12-12F	BPGFN12-12F
1"	BVGFC16-16F	BPGFN16-16F
1-1/4"	BVGFC20-20F	BPGFN20-20F

Size	Coupler Plug	Nipple Cap
1/4"	PDP-4	PDC-4
3/8"	PDP-6	PDC-6
1/2"	PDP-8	PDC-8
3/4"	PDP-12	PDC-12
1"	N/A	N/A
1-1/4"	N/A	N/A

! WARNING !

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Snap-tite, Inc., its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operation conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Snap-tite, Inc. and its subsidiaries at any time without notice.



Quick Disconnect & Valve Division
201 Titusville Road
Union City, Pennsylvania 16438-8699 USA
PH: 814-438-3821 FAX: 814-438-3069
e-mail: qd&v_sales@snap-tite.com
www.snap-tite.com



Industrial Estate
Whitemill - Wexford
Republic of Ireland
PH: 353-53-41566 FAX: 353-53-41582
e-mail: ste_sales@snap-tite.com
www.snap-tite.com

ISO-9001 Certified