
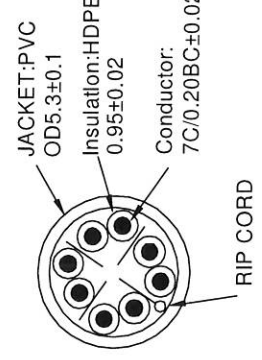



CAT5E UTP PATCH CORD
 QUEST CABLING SOLUTIONS CAT5E 350MHZ UTP 60°C ISO/IEC 11801 & EN50288 & ANSI/TIA-568C.2
 ETL/3P VERIFIED -24AWGX4P PATCH TYPE CMR (UL) E466009 ROHS

COLOR\X	1	2	3	4	5	6	7	8	9
BLACK									
BLUE									
RED									
ORANGE									
YELLOW									
GREEN									
WHITE									
GREY									



- W/OR 1 W/OR
- OR 2 OR
- W/GR 3 W/GR
- GR 6 GR
- BL 4 BL
- W/BL 5 W/BL
- W/BR 7 W/BR
- BR 8 BR

Length: 1', 3', 5', 7', 10', 15', 25', 50', 100'



NO	Description	Q, TY	Unit
9			
8			
7			
6			
5			
4			
3	60P PVC MOLDED	12	g
2	8PBC MALE, GOLD PLATED PINS	2	pcs
1	CABLE:(7C/0.20BC±0.02BC+HDPE0.95) 4P+RIP OD:5.3±0.1MM	1	pcs

APPROVED	CHECKED	DRAWING	DESIGNED	DESCRIPTION	SCALE	FIT	UNITS:MM	3RD ANGLE
Wxp	Wxp	David Feng	David Feng	MODEL NO NPC-1XXX	△			
				DRAWING NO URT5E-M4F-XX-XX	△			
				FINISHING	△			
				MATERIAL				
							2014.05.09	A1
					SYM		DATE	REVISION