

Introducing Our Newest Generation Of Dispensers, The TGT Series T7000



Model T7000
(Flag not standard.)

TGT's New Model T7000 Features:

- ★ Compatibility with World Wide Voltages
- ★ Intrinsically Safe Design
- ★ Class 1 Div. 1
- ★ In Dispenser Sequencing
- ★ Temperature Compensation of Gas Pressure
- ★ Light Duty Design 1500 cfm Flow Rate
- ★ Transit Bus Design 3500 cfm Flow Rate
- ★ Dual Hose and Single Hose Designs
- ★ Local Access Key Pad for Control of Dispenser
- ★ RS 232 Laptop Interface
- ★ On Board Card Reader
- ★ Micro Motion® Mass Flow Meters

PRESSURE	FLOWRATE	QUANTITY	AMB TEMP
+3258	0648	009.381	+076
DELIVERY	BANK-2	BANK-3	END CODE
ON	ON	OFF	STOP SWITCH

Easy-to-Read Full Control Alphanumeric Display

Choose Tulsa Gas Technologies to supply your NGV Dispenser needs.





TULSA GAS TECHNOLOGIES

4809 South 101 East Avenue • Tulsa, Oklahoma 74146

(918) 665-2641 • FAX: (918) 665-2657 • www.tulsagastech.com



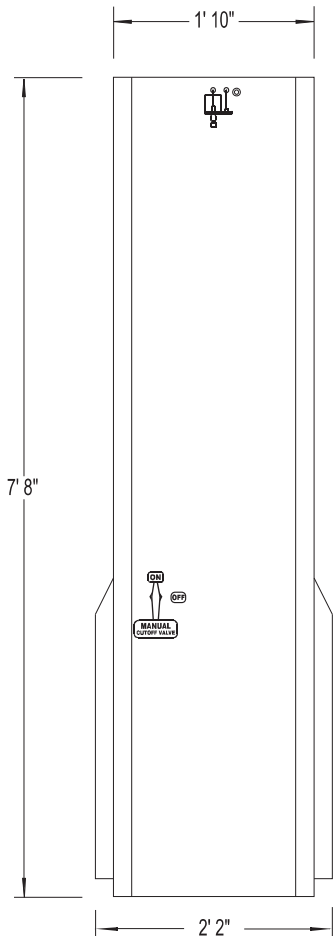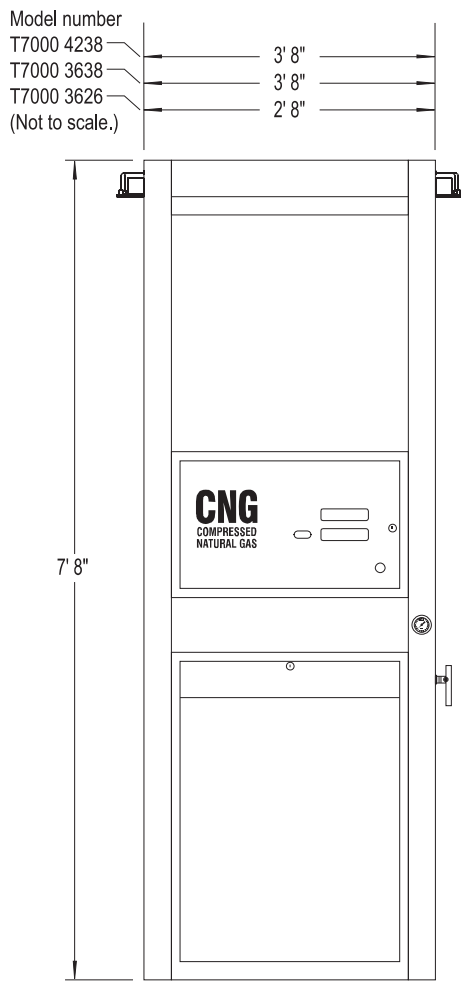

FEATURES:

- In-dispenser Card Reader available
- Quick order turnaround
- Easy-to-read "back-lit" liquid crystal displays
- Battery backup display, with all totals in non-volatile memory
- Volume displays in gallon or liter equivalents, cubic feet, cubic meters, or mass pounds
- Powder-coated steel body (stainless steel optional)
- Display of total sale, unit price and totalizers
- Hose retractor
- Easy-to-read full control alphanumeric display
- Single or twin hose and dual pressure models
- Micro Motion® Mass Flow Meter*, CNG50, DH100
- Fill and vent hoses with safety breakaway couplings
- Interfaces with all common card readers
- "At pump" price setting and totalizer displays
- Automatic shut-down on pulser fault
- Custom paint on cabinets available
- Output pulses 10, 100 or 1000 ppu
- In-Line hose breakaway
- ANSI/IAS NGV 4.2 - 1999 listed hoses

**MADE IN
THE U.S.A.**

* Micro Motion® is a trademark of Micro Motion Corporation, Boulder, Colorado

SPECIFICATIONS:

- Sales display to 6 digits on a .75" back-lit LCD
- Prices display to 4 digits on a .5" back-lit LCD
- Non-resettable volume totalizer
- Battery powers displays for 15 minutes and backs up total to memory
- 3000/3600 psi operating pressure
- 5000 psVAC/50Hz
- Class 1, Div 1, Group D, Zone 1, MAWP
- Fail-safe valve design
- Operating temperature range -40° to +60° C
- Electrical requirement: 120VAC/60Hz or 250