


NASON High Pressure Switch CD

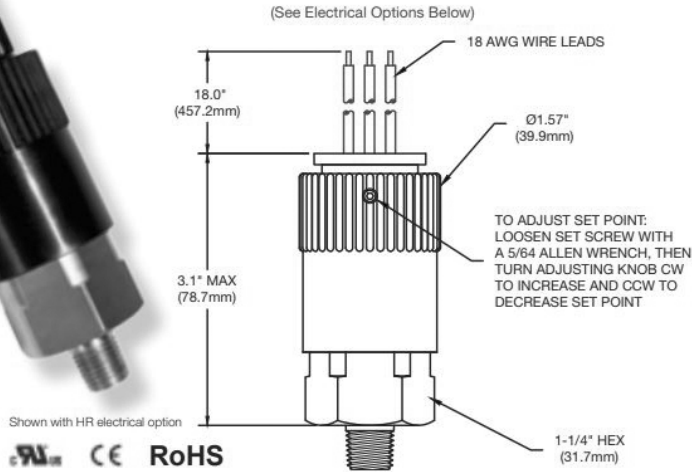

Features

- Long-life elastomer diaphragm (Ranges 1 – 3)
- Proven sealed piston sensor (Ranges 4 – 8)
- High-quality snap-action switch
- Field adjustable
- Easily customized
- Quick delivery
- NEMA 4, 13

Operating Specifications

Set Point Range	10 – 7500 PSI	(.69 – 517 Bar)
Set Point Tolerance	±5 PSI or 5%	(.34 Bar)
Maximum Operating Pressure	1000 PSI (Ranges 1 – 3)	(69 Bar)
	5000 PSI (Ranges 4 – 7)	(344 Bar)
	7500 PSI (Range 8)	(517 Bar)
Proof Pressure	3000 PSI (Ranges 1 – 3)	(206 Bar)
	15000 PSI (Ranges 4 – 7)	(1034 Bar)
	22500 PSI (Range 8)	(1551 Bar)
Differential	10 – 20%	
Current Rating	5 A @ 250 VAC	5 A @ 30 VDC (Resistive)
Media Connection	Standard: Brass (Optional: Nickel Plating, 303 SS, 316 SS)	
Circuit Form	SPST-NO, SPST-NC or SPDT	
Electrical Connection	See Order Chart Below for Options	
Diaphragm Material	Buna (Ranges 1 – 3)	
	Hardened Steel Piston (Ranges 4 – 8)	
Cycle Life	1 Million	
Operating Temperature	-20°F - +220°F	
Unit Weight	.47 lbs (noryl adjustment knob); .70 lbs (metal adjustment knob)	

CHECK OUT
nasonptc.com/configure
 to create your own custom CAD file

How to Order (Example: Part Number: CD - 1B5 - 750J / EL)

CD	-	1	B	5	-	7	5	0	J	/	EL
Media Connection		Circuit Form		Range		Desired Set Point		Set Point Direction			Electrical Options
Piston		A SPST-NO		1 10 – 40 PSI		10 – 7500 PSI		J Rising Adjustable		WL Wire Leads 18"	EL Male Conduit 1/2" – 14
1 1/4" NPT Male		B SPST-NC		2 25 – 100 PSI				G Falling Adjustable		EF Female Conduit 1/2" – 14	HR DIN43650A Connector
3 3/4" SAE Male (-8)		C SPDT		3 50 – 200 PSI						HH DIN43650A Plug Only	WP Weather Pack
11 9/16" SAE Male				4 100 – 400 PSI						MP Metri-Pack	WD Deutsch
Diaphragms				5 250 – 1000 PSI						AT 10 A @ 125/250 VAC 5 A @ 30 VDC	AU Gold Plate/Alloy for low currents
1 1/4" NPT Male				6 500 – 2000 PSI							
9 3/8" NPT Male				7 1200 – 4500 PSI							
				8 2400 – 7500 PSI							

This Page Intentionally Left Blank