

1/2" hose

# CERTIFICATE OF CONFORMANCE FOR MATERIALS SHIPPED

Tulsa Gas Technologies, Inc. (TGT) hereby certifies that all materials in the manufacture of serial number ~~12011200~~ TRILLIUM material and/or manufacturing specifications indicated in drawings, bulletins or specifications as called for on the said purchase order. Test reports are on file with us or with our suppliers for examination and indicate conformance with applicable specification requirements. In production items listed, no direct contact was made with mercury, any of its compounds nor with any mercury containing devices employing a single boundary for containment. Tulsa Gas Technologies, Inc. also certifies that the parts listed and shipped on the date indicated are manufactured in accordance with Parker specifications and quality standards, if applicable, as stated on the drawings or specifications called for on said purchase order. All parts and test conform to AGA I-93.

SIGNED BY:           *e.r. kendall*          

TITLE: ASSEMBLY

DATE: 2/12/2018

Tulsa Gas Technologies, Inc.  
 4809 S. 101st. E. Ave.  
 Tulsa, OK 74146  
 918-665-2641

Disp. Serial # 1801200  
 Customer Name TRILLIUM  
 Customer PO N/V  
 Date Required 2/6/2018

ASSEMBLY/CERTIFICATION SHEET

	SIGN	DATE
1 <input checked="" type="checkbox"/> Review shop work order versus customer print and history	<u>CK</u>	<u>2/6/2018</u>
2 <input checked="" type="checkbox"/> Component part numbers: _____ Pack dates and/or QC codes _____ <u>5206 73 306 46</u>	<u>CK</u>	<u>2/6/2018</u>
3 <input checked="" type="checkbox"/> ID band number _____ <u>5CNG8/5CNG4-0606/050688/64-96"</u>	<u>CK</u>	<u>2/6/2018</u>
4 <input checked="" type="checkbox"/> Hose Cut Length _____ <u>96"</u>	<u>CK</u>	<u>2/6/2018</u>
5 _____ Pre-expansion of hose (if required) Size _____ Remarks: _____		
6 <input checked="" type="checkbox"/> Audit and mark appropriate insertion depth	<u>CH</u>	<u>2/6/2018</u>
7 _____ Add special accessories _____ Remarks: _____		
8 <input checked="" type="checkbox"/> Apply danger tag and ID band	<u>CK</u>	<u>2/6/2018</u>
9 <input checked="" type="checkbox"/> Install bend restrictors Remarks: _____	<u>CK</u>	<u>2/6/2018</u>
10 <input checked="" type="checkbox"/> Assemble fittings; check insertion depth Remarks: _____	<u>CK</u>	<u>2/6/2018</u>
11 _____ Set offset angle and/or orientation Remarks: _____		
12 <input checked="" type="checkbox"/> Perform crimp or swage on product/crimp set die-using Parker Catalog 4660, page K58 _____ <input checked="" type="checkbox"/> 1/2) 80C-PO8H _____ 3/8) 80C-PO6H _____ 1/4) 80C-PO4H _____ 1/8) 80C-PO2 _____ 3/8) 80C-PO6 _____ 3/4) 80C-P12H	<u>CK</u>	<u>2/6/2018</u>
13 _____ Add special accessories after crimping/swaging		
14 _____ Perform and record burst test results, if applicable Remarks: _____		
15 _____ Air test, if applicable Test pressure Psi _____ Seconds _____; Pass/Fail (Circle One) Remarks: _____		
16 <input checked="" type="checkbox"/> Hydrostatic proof test Test pressure Psi <u>10,000</u> Seconds <u>30</u> ; <input checked="" type="checkbox"/> Pass/Fail (Circle One) Remarks: <u>Passed Pressure Test</u>	<u>CH</u>	<u>2/6/2018</u>
17 <input checked="" type="checkbox"/> Flush method water, and then air	<u>CH</u>	<u>2/6/2018</u>
18 <input checked="" type="checkbox"/> Perform and record conductivity test; Meter _____ <u>Megger Mit200</u> Hose resistance _____ 0 _____ (-) Electrode resistance _____ 0.03 0.03	<u>CK</u>	<u>2/6/2018</u>
19 <input checked="" type="checkbox"/> Final audit: Check boxes for items inspected, as applicable: _____ <input checked="" type="checkbox"/> Correct hose; _____ <input checked="" type="checkbox"/> Correct fittings; _____ <input checked="" type="checkbox"/> Correct customer PN Check swage or crimp diameters: _____ 5CNG-4-55 .580+-.05 _____ 5CNG-4-58 .785/.805 _____ <input checked="" type="checkbox"/> 5CNG-8-58 .900/.920 _____ 5CNG-6-55 .675/.695 _____ 5CNG-12-58 1.20/1.22 *****100% VISUAL INSPECT FOR THE FOLLOWING***** _____ <input checked="" type="checkbox"/> Hose fittings crimped; _____ <input checked="" type="checkbox"/> Air passes through assembly; _____ <input checked="" type="checkbox"/> Presence of threads	<u>CK</u>	<u>2/6/2018</u>
20 <input checked="" type="checkbox"/> Cap and package hose	<u>CK</u>	<u>2/6/2018</u>
21 <input checked="" type="checkbox"/> Certificate of Conformance for Materials Shipped (on back)	<u>CK</u>	<u>2/6/2018</u>


- 3 FITTING TYPE
- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

- 7 FITTING SIZE
- 4 1/4"
- 6 3/8"
- 8 1/2"
- 12 3/4"

- 4 FITTING TYPE
- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

- 8 FITTING SIZE
- 4 1/4"
- 6 3/8"
- 8 1/2"
- 12 3/4"

BREAK-AWAY END

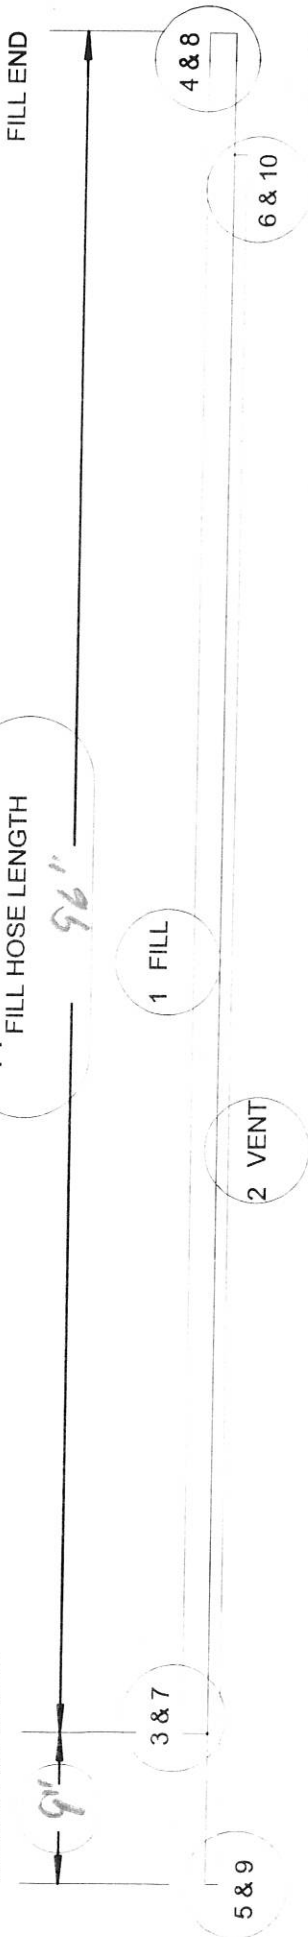

- 5 FITTING TYPE
- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

- 2 55 SERIES HOSE SIZE
- 2 1/8"
- 4 1/4"
- 6 3/8"

- 6 FITTING TYPE
- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

- 10 FITTING SIZE
- 2 1/8"
- 4 1/4"
- 6 3/8"

STANDARD 3" SHEREX 5/8" } 3/8"

WORK ORDER # TR11 Ft 200rta

5CNG8/5CNGH - 06 06/05 06 - 88/64 - 96"

FILL HOSE

CERTIFICATE OF CONFORMANCE  
FOR  
MATERIALS SHIPPED

Tulsa Gas Technologies, Inc. (TGT) hereby certifies that all materials in the manufacture of serial number *18D11200* TRILLIUM material and/or manufacturing specifications indicated in drawings, bulletins or specifications as called for on the said purchase order. Test reports are on file with us or with our suppliers for examination and indicate conformance with applicable specification requirements. In production items listed, no direct contact was made with mercury, any of its compounds nor with any mercury containing devices employing a single boundary for containment. Tulsa Gas Technologies, Inc. also certifies that the parts listed and shipped on the date indicated are manufactured in accordance with Parker specifications and quality standards, if applicable, as stated on the drawings or specifications called for on said purchase order. All parts and test conform to AGA I-93.

SIGNED BY: *E. R. Kendall*

TITLE: ASSEMBLY

DATE: 2/12/2018

Tulsa Gas Technologies, Inc.  
 4809 S. 101st. E. Ave.  
 Tulsa, OK 74146  
 918-665-2641

Disp. Serial # 18011200  
 Customer Name TRILLIUM  
 Customer PO N/V  
 Date Required 2/6/2018

ASSEMBLY/CERTIFICATION SHEET

- |   | SIGN      | DATE            |
|---|-----------|-----------------|
| 1 <input checked="" type="checkbox"/> Review shop work order versus customer print and history  | <u>ck</u> | <u>2/6/2018</u> |
| 2 <input checked="" type="checkbox"/> Component part numbers: _____<br>Pack dates and/or QC codes <u>52067 30645</u>  | <u>ck</u> | <u>2/6/2018</u> |
| 3 <input checked="" type="checkbox"/> ID band number <u>5CNG8/5CNG4-0606/050688/64-36"</u>  | <u>ck</u> | <u>2/6/2018</u> |
| 4 <input checked="" type="checkbox"/> Hose Cut Length <u>36"</u>  | <u>ck</u> | <u>2/6/2018</u> |
| 5 <input type="checkbox"/> Pre-expansion of hose (if required) Size _____<br>Remarks: _____   |           |                 |
| 6 <input checked="" type="checkbox"/> Audit and mark appropriate insertion depth  | <u>ck</u> | <u>2/6/2018</u> |
| 7 <input type="checkbox"/> Add special accessories _____<br>Remarks: _____  |           |                 |
| 8 <input checked="" type="checkbox"/> Apply danger tag and ID band  | <u>ck</u> | <u>2/6/2018</u> |
| 9 <input checked="" type="checkbox"/> Install bend restrictors _____<br>Remarks: _____  | <u>ck</u> | <u>2/6/2018</u> |
| 10 <input checked="" type="checkbox"/> Assemble fittings; check insertion depth _____<br>Remarks: _____   | <u>ck</u> | <u>2/6/2018</u> |
| 11 <input type="checkbox"/> Set offset angle and/or orientation _____<br>Remarks: _____   |           |                 |
| 12 <input checked="" type="checkbox"/> Perform crimp or swage on product/crimp set die-using Parker Catalog 4660, page K58<br>_____ X _____ 1/2) 80C-PO8H _____ 3/8) 80C-PO6H<br>_____ 1/4) 80C-PO4H _____ 1/8) 80C-PO2<br>_____ 3/8) 80C-PO6 _____ 3/4) 80C-P12H   | <u>ck</u> | <u>2/6/2018</u> |
| 13 <input type="checkbox"/> Add special accessories after crimping/swaging _____  |           |                 |
| 14 <input type="checkbox"/> Perform and record burst test results, if applicable _____<br>Remarks: _____  |           |                 |
| 15 <input type="checkbox"/> Air test, if applicable _____<br>Test pressure Psi _____ Seconds _____; Pass/Fail (Circle One)<br>Remarks: _____  |           |                 |
| 16 <input checked="" type="checkbox"/> Hydrostatic proof test _____<br>Test pressure Psi <u>10,000</u> Seconds <u>30</u> ; <u>Pass</u> /Fail (Circle One)<br>Remarks: <u>Passed Pressure Test</u>   | <u>ck</u> | <u>2/6/2018</u> |
| 17 <input checked="" type="checkbox"/> Flush method water, and then air   | <u>ck</u> | <u>2/6/2018</u> |
| 18 <input checked="" type="checkbox"/> Perform and record conductivity test; Meter <u>Megger Mit200</u><br>Hose resistance <u>0</u> (-) Electrode resistance <u>0.01</u><br>0.01  | <u>ck</u> | <u>2/6/2018</u> |
| 19 <input checked="" type="checkbox"/> Final audit: Check boxes for items inspected, as applicable:<br>_____ X _____ Correct hose; _____ X _____ Correct fittings; _____ X _____ Correct customer PN<br>Check swage or crimp diameters: _____ 5CNG-4-55 .580+-.05<br>_____ 5CNG-4-58 .785/.805 _____ X _____ 5CNG-8-58 .900/.920<br>_____ 5CNG-6-55 .675/.695 _____ 5CNG-12-58 1.20/1.22<br>*****100% VISUAL INSPECT FOR THE FOLLOWING*****<br>_____ X _____ Hose fittings crimped; _____ X _____ Air passes through assembly;<br>_____ X _____ Presence of threads | <u>ck</u> | <u>2/6/2018</u> |
| 20 <input checked="" type="checkbox"/> Cap and package hose   | <u>ck</u> | <u>2/6/2018</u> |
| 21 <input checked="" type="checkbox"/> Certificate of Conformance for Materials Shipped (on back)   | <u>ck</u> | <u>2/6/2018</u> |

- 3 FITTING TYPE
- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

- 1 58 SERIES HOSE SIZE
- 4 1/4"
- 6 3/8"
- 8 1/2"
- 10 5/8"
- 12 3/4"

- 4 FITTING TYPE
  - 01 NPT MALE
  - 02 NPT FEMALE
  - 03 JIC MALE
  - 04 SAE 45 MALE
  - 05 SAE O-RING STRAIGHT THREAD
  - 06 JIC FEMALE SWIVEL
  - 07 FEMALE PIPE SWIVEL
- 8 FITTING SIZE
  - 4 1/4"
  - 6 3/8"
  - 8 1/2"
  - 12 3/4"

BREAK-AWAY END

11 FILL HOSE LENGTH  
36"



3 & 7

1 FILL

5 & 9

2 VENT

6 & 10

4 & 8

STANDARD 3" SHEREX 5/8"

- 5 FITTING TYPE
- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

- 2 55 SERIES HOSE SIZE
- 2 1/8"
- 4 1/4"
- 6 3/8"

- 6 FITTING TYPE
  - 01 NPT MALE
  - 02 NPT FEMALE
  - 03 JIC MALE
  - 04 SAE 45 MALE
  - 05 SAE O-RING STRAIGHT THREAD
  - 06 JIC FEMALE SWIVEL
  - 07 FEMALE PIPE SWIVEL
- 10 FITTING SIZE
  - 2 1/8"
  - 4 1/4"
  - 6 3/8"

w/o TRILL-120517  
Trill Ft Worth

WORK ORDER # 1 5CNG8/5CNGM - 0606/0506 - 88/44 - 36"

3/4 hose

CERTIFICATE OF CONFORMANCE  
FOR  
MATERIALS SHIPPED

Tulsa Gas Technologies, Inc. (TGT) hereby certifies that all materials in the manufacture of serial number *18011200* TRILLIUM material and/or manufacturing specifications indicated in drawings, bulletins or specifications as called for on the said purchase order. Test reports are on file with us or with our suppliers for examination and indicate conformance with applicable specification requirements. In production items listed, no direct contact was made with mercury, any of its compounds nor with any mercury containing devices employing a single boundary for containment. Tulsa Gas Technologies, Inc. also certifies that the parts listed and shipped on the date indicated are manufactured in accordance with Parker specifications and quality standards, if applicable, as stated on the drawings or specifications called for on said purchase order. All parts and test conform to AGA I-93.

SIGNED BY: *e. R. Kendall*

TITLE: ASSEMBLY

DATE: 2/12/2018

Tulsa Gas Technologies, Inc.  
 4809 S. 101st. E. Ave.  
 Tulsa, OK 74146  
 918-665-2641

Disp. Serial # 18011200  
 Customer Name TRILLIUM  
 Customer PO N/A  
 Date Required 2/2/2018

ASSEMBLY/CERTIFICATION SHEET

	SIGN	DATE
1 <input checked="" type="checkbox"/> Review shop work order versus customer print and history	<u>CK</u>	<u>2/2/2018</u>
2 <input checked="" type="checkbox"/> Component part numbers: _____ Pack dates and/or QC codes _____ <u>522 2715613</u>	<u>CK</u>	<u>2/2/2018</u>
3 <input checked="" type="checkbox"/> ID band number _____ <u>5CNG12/5CNG6-0606/0506-1212/66-96"</u>	<u>CK</u>	<u>2/2/2018</u>
4 <input checked="" type="checkbox"/> Hose Cut Length _____ <u>96"</u>	<u>CK</u>	<u>2/2/2018</u>
5 _____ Pre-expansion of hose (if required) Size _____ Remarks: _____		
6 <input checked="" type="checkbox"/> Audit and mark appropriate insertion depth	<u>CK</u>	<u>2/2/2018</u>
7 _____ Add special accessories _____ Remarks: _____		
8 <input checked="" type="checkbox"/> Apply danger tag and ID band	<u>CK</u>	<u>2/2/2018</u>
9 <input checked="" type="checkbox"/> Install bend restrictors Remarks: _____	<u>CK</u>	<u>2/2/2018</u>
10 <input checked="" type="checkbox"/> Assemble fittings; check insertion depth Remarks: _____	<u>CK</u>	<u>2/2/2018</u>
11 _____ Set offset angle and/or orientation Remarks: _____		
12 <input checked="" type="checkbox"/> Perform crimp or swage on product/crimp set die-using Parker Catalog 4660, page K58 _____ 1/2) 80C-PO8H _____ 3/8) 80C-PO6H _____ 1/4) 80C-PO4H _____ 1/8) 80C-PO2 _____ 3/8) 80C-PO6 _____ X 3/4) 80C-P12H	<u>CK</u>	<u>2/2/2018</u>
13 _____ Add special accessories after crimping/swaging _____		
14 _____ Perform and record burst test results, if applicable Remarks: _____		
15 _____ Air test, if applicable Test pressure Psi _____ Seconds _____; Pass/Fail (Circle One) Remarks: _____		
16 <input checked="" type="checkbox"/> Hydrostatic proof test Test pressure Psi <u>10,000</u> Seconds <u>30</u> ; Pass/Fail (Circle One) Remarks: _____	<u>CK</u>	<u>2/2/2018</u>
17 <input checked="" type="checkbox"/> Flush method water, and then air	<u>CK</u>	<u>2/2/2018</u>
18 <input checked="" type="checkbox"/> Perform and record conductivity test; Meter _____ <u>Megger Mit200</u> Hose resistance _____ <u>0</u> (-) Electrode resistance _____ <u>0.03</u> 0.03	<u>CK</u>	<u>2/2/2018</u>
19 <input checked="" type="checkbox"/> Final audit: Check boxes for items inspected, as applicable: _____ <input checked="" type="checkbox"/> Correct hose; _____ <input checked="" type="checkbox"/> Correct fittings; _____ <input checked="" type="checkbox"/> Correct customer PN Check swage or crimp diameters: _____ <u>5CNG-4-55 .580+- .05</u> _____ <u>5CNG-4-58 .785/.805</u> _____ <u>5CNG-8-58 .900/.920</u> _____ <u>5CNG-6-55 .675/.695</u> _____ <input checked="" type="checkbox"/> <u>5CNG-12-58 1.20/1.22</u> *****100% VISUAL INSPECT FOR THE FOLLOWING***** _____ <input checked="" type="checkbox"/> Hose fittings crimped; _____ <input checked="" type="checkbox"/> Air passes through assembly; _____ <input checked="" type="checkbox"/> Presence of threads	<u>CK</u>	<u>2/2/2018</u>
20 <input checked="" type="checkbox"/> Cap and package hose	<u>CK</u>	<u>2/2/2018</u>
21 <input checked="" type="checkbox"/> Certificate of Conformance for Materials Shipped (on back)	<u>CK</u>	<u>2/2/2018</u>



- 3 FITTING TYPE
- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

- 4 FITTING TYPE
- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

- 5 FITTING TYPE
- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

- 6 FITTING TYPE
- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

- 7 FITTING TYPE
- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

- 8 FITTING TYPE
- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL



- 5 FITTING TYPE
  - 01 NPT MALE
  - 02 NPT FEMALE
  - 03 JIC MALE
  - 04 SAE 45 MALE
  - 05 SAE O-RING STRAIGHT THREAD
  - 06 JIC FEMALE SWIVEL
  - 07 FEMALE PIPE SWIVEL
- 6 FITTING TYPE
  - 01 NPT MALE
  - 02 NPT FEMALE
  - 03 JIC MALE
  - 04 SAE 45 MALE
  - 05 SAE O-RING STRAIGHT THREAD
  - 06 JIC FEMALE SWIVEL
  - 07 FEMALE PIPE SWIVEL
- 9 FITTING TYPE
  - 01 NPT MALE
  - 02 NPT FEMALE
  - 03 JIC MALE
  - 04 SAE 45 MALE
  - 05 SAE O-RING STRAIGHT THREAD
  - 06 JIC FEMALE SWIVEL
  - 07 FEMALE PIPE SWIVEL
- 2 FITTING TYPE
  - 01 NPT MALE
  - 02 NPT FEMALE
  - 03 JIC MALE
  - 04 SAE 45 MALE
  - 05 SAE O-RING STRAIGHT THREAD
  - 06 JIC FEMALE SWIVEL
  - 07 FEMALE PIPE SWIVEL
- 10 FITTING TYPE
  - 01 NPT MALE
  - 02 NPT FEMALE
  - 03 JIC MALE
  - 04 SAE 45 MALE
  - 05 SAE O-RING STRAIGHT THREAD
  - 06 JIC FEMALE SWIVEL
  - 07 FEMALE PIPE SWIVEL

STANDARD 3" SHEREX 5/8"

WORK ORDER # 7111 FT 200411  
 5CNG1/5CNG2/3/4/5/6/7/8/9/10/11  
 1/05/06/07/08/09/10/11/12/13/14/15/16/17/18/19/20/21/22/23/24/25/26/27/28/29/30/31/32/33/34/35/36/37/38/39/40/41/42/43/44/45/46/47/48/49/50/51/52/53/54/55/56/57/58/59/60/61/62/63/64/65/66/67/68/69/70/71/72/73/74/75/76/77/78/79/80/81/82/83/84/85/86/87/88/89/90/91/92/93/94/95/96/97/98/99/100

CERTIFICATE OF CONFORMANCE  
FOR  
MATERIALS SHIPPED

Tulsa Gas Technologies, Inc. (TGT) hereby certifies that all materials in the manufacture of serial number 18011200 TRILLIUM material and/or manufacturing specifications indicated in drawings, bulletins or specifications as called for on the said purchase order. Test reports are on file with us or with our suppliers for examination and indicate conformance with applicable specification requirements. In production items listed, no direct contact was made with mercury, any of its compounds nor with any mercury containing devices employing a single boundary for containment. Tulsa Gas Technologies, Inc. also certifies that the parts listed and shipped on the date indicated are manufactured in accordance with Parker specifications and quality standards, if applicable, as stated on the drawings or specifications called for on said purchase order. All parts and test conform to AGA I-93.

SIGNED BY: C.R. Kessler

TITLE: ASSEMBLY

DATE: 2/12/2018

Tulsa Gas Technologies, Inc.  
 4809 S. 101st. E. Ave.  
 Tulsa, OK 74146  
 918-665-2641

Disp. Serial # 18011200  
 Customer Name TRILLIUM  
 Customer PO N/A  
 Date Required 2/2/2018

ASSEMBLY/CERTIFICATION SHEET

	SIGN	DATE
1 <input checked="" type="checkbox"/> Review shop work order versus customer print and history	<u>CK</u>	<u>2/2/2018</u>
2 <input checked="" type="checkbox"/> Component part numbers: _____ Pack dates and/or QC codes _____ <u>5222715610</u>	<u>CK</u>	<u>2/2/2018</u>
3 <input checked="" type="checkbox"/> ID band number _____ <u>5CNG12/5CNG6-0606/0506-1212/66-36"</u>	<u>CK</u>	<u>2/2/2018</u>
4 <input checked="" type="checkbox"/> Hose Cut Length _____ <u>36"</u>	<u>CK</u>	<u>2/2/2018</u>
5 _____ Pre-expansion of hose (if required) Size _____ Remarks: _____		
6 <input checked="" type="checkbox"/> Audit and mark appropriate insertion depth	<u>CK</u>	<u>2/2/2018</u>
7 _____ Add special accessories _____ Remarks: _____		
8 <input checked="" type="checkbox"/> Apply danger tag and ID band	<u>CK</u>	<u>2/2/2018</u>
9 <input checked="" type="checkbox"/> Install bend restrictors Remarks: _____	<u>CK</u>	<u>2/2/2018</u>
10 <input checked="" type="checkbox"/> Assemble fittings; check insertion depth Remarks: _____	<u>CK</u>	<u>2/2/2018</u>
11 _____ Set offset angle and/or orientation Remarks: _____		
12 <input checked="" type="checkbox"/> Perform crimp or swage on product/crimp set die-using Parker Catalog 4660, page K58 _____ 1/2) 80C-PO8H _____ 3/8) 80C-PO6H _____ 1/4) 80C-PO4H _____ 1/8) 80C-PO2 _____ 3/8) 80C-PO6 _____ X 3/4) 80C-P12H	<u>CK</u>	<u>2/2/2018</u>
13 _____ Add special accessories after crimping/swaging _____		
14 _____ Perform and record burst test results, if applicable Remarks: _____		
15 _____ Air test, if applicable Test pressure Psi _____ Seconds _____; Pass/Fail (Circle One) Remarks: _____		
16 <input checked="" type="checkbox"/> Hydrostatic proof test Test pressure Psi <u>10,000</u> Seconds <u>30</u> ; <u>Pass</u> /Fail (Circle One) Remarks: <u>Passed Pressure Test</u>	<u>CK</u>	<u>2/2/2018</u>
17 <input checked="" type="checkbox"/> Flush method water, and then air	<u>CK</u>	<u>2/2/2018</u>
18 <input checked="" type="checkbox"/> Perform and record conductivity test; Meter _____ <u>Megger Mit200</u> Hose resistance _____ <u>0</u> (-) Electrode resistance _____ <u>0.01</u> 0.01	<u>CK</u>	<u>2/2/2018</u>
19 <input checked="" type="checkbox"/> Final audit: Check boxes for items inspected, as applicable: _____ <input checked="" type="checkbox"/> Correct hose; _____ <input checked="" type="checkbox"/> Correct fittings; _____ <input checked="" type="checkbox"/> Correct customer PN Check swage or crimp diameters: _____ <u>5CNG-4-55 .580+-.05</u> _____ <u>5CNG-4-58 .785/.805</u> _____ <u>5CNG-8-58 .900/.920</u> _____ <u>5CNG-6-55 .675/.695</u> _____ <input checked="" type="checkbox"/> <u>5CNG-12-58 1.20/1.22</u> *****100% VISUAL INSPECT FOR THE FOLLOWING***** _____ <input checked="" type="checkbox"/> Hose fittings crimped; _____ <input checked="" type="checkbox"/> Air passes through assembly; _____ <input checked="" type="checkbox"/> Presence of threads	<u>CK</u>	<u>2/2/2018</u>
20 <input checked="" type="checkbox"/> Cap and package hose	<u>CK</u>	<u>2/2/2018</u>
21 <input checked="" type="checkbox"/> Certificate of Conformance for Materials Shipped (on back)	<u>CK</u>	<u>2/2/2018</u>

- 3 FITTING TYPE
- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

- 1 58 SERIES
- HOSE SIZE
- 4 1/4"
- 6 3/8"
- 8 1/2"
- 10 5/8"
- 12 3/4"

- 4 FITTING TYPE
- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

- 8 FITTING SIZE
- 4 1/4"
- 6 3/8"
- 8 1/2"
- 12 3/4"

BREAK-AWAY END

11 FILL HOSE LENGTH



5 & 9

3 & 7

2 VENT

1 FILL

4 & 8

6 & 10

- 5 FITTING TYPE
- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

- 2 55 SERIES
- HOSE SIZE
- 2 1/8"
- 4 1/4"
- 6 3/8"

- 6 FITTING TYPE
- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

- 10 FITTING SIZE
- 2 1/8"
- 4 1/4"
- 6 3/8"

STANDARD 3" SHEREX 5/8"

WORK ORDER # 1111 FFWORTH

1 5CNG12/5CNG64-2404/0506-14/4-36

FILL HOSE

DATE 03/27/97  
 135080 BY G. S. WIL  
 1995 09 FILLHOSE worlorder.dwg

018 666 2641 FAX 018 666  
 018 666 2641 FAX 018 666