



UNCONTROLLED DOCUMENT

PART NUMBER		REV.
LCD-H401C52TF		A
REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #11146.	02.07.07

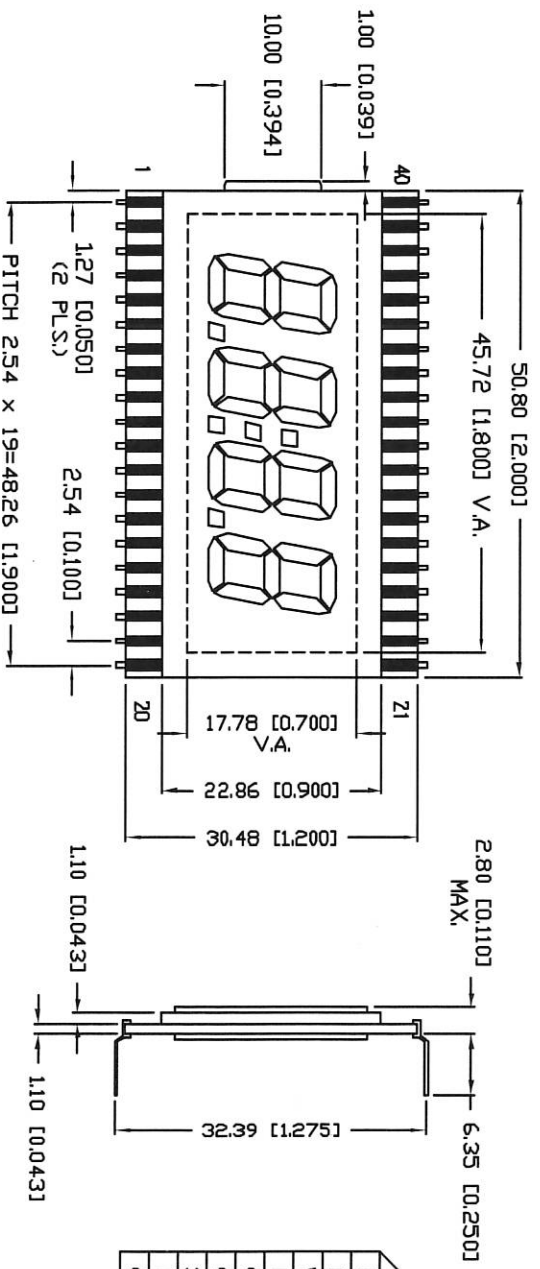

CHARACTERISTICS	
FLUID TYPE:	TN
BACKGROUND COLOR:	GRAY
VIEWING DIRECTION:	8:00
DISPLAY MODE:	TRANSFLECTIVE
OPERATING VOLTAGE:	5.0V
OPERATING TEMP.	-40°C TO 85°C
STORAGE TEMP.	-40°C TO 85°C
DRIVING METHODE:	STATIC
CONNECTION TYPE:	40 PINS

CHARACTER DETAIL

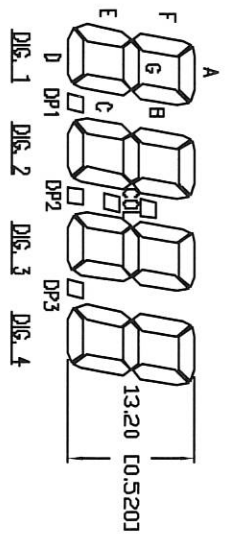

PIN NO.	1	2	3	4	5	6	7	8	9	10
SEGMENT	COM	N/C	N/C	N/C	1E	1D	1C	DP1	2E	2D
PIN NO.	11	12	13	14	15	16	17	18	19	20
SEGMENT	2C	DP2	3E	3D	3C	DP3	4E	4D	4C	4B
PIN NO.	21	22	23	24	25	26	27	28	29	30
SEGMENT	4A	4F	4G	3B	3A	3F	3G	00L	2B	2A
PIN NO.	31	32	33	34	35	36	37	38	39	40
SEGMENT	2F	2G	N/C	1B	1A	1F	1G	N/C	N/C	COM

\*UNLESS DIMENSES SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=.41 (±0.03), X.2=±0.5 (±0.02), X.00=X.25 (±0.01), X.000=±0.127 (±0.005), LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.03), MIN = -0.00

REV. A  
PART NUMBER  
LCD-H401C52TF

0.52" CHARACTER HEIGHT, FOUR DIGIT LCD GLASS,  
TN, TRANSFLECTIVE, 40 PINS, EXTENDED TEMPERATURE.

CONFIDENTIAL INFORMATION  
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIALLY APPROVED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND REPRODUCTION TO ALL THIRD PARTIES.

REBAILD NOTE  
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF ERRY AND FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD  
PALATKA, IL 60067-6976  
PHONE: +1.847.359.2790  
US WEB: www.lumex.com  
TW WEB: www.lumex.com.tw

DRAWN BY: JC  
CHECKED BY:  
APPROVED BY:  
DATE: 3.4.99  
PAGE: 1 OF 1  
SCALE: N/A

UNCONTROLLED DOCUMENT

