

CERTIFICATE OF CONFORMANCE
FOR
MATERIALS SHIPPED

Tulsa Gas Technologies, Inc. (TGT) hereby certifies that all materials in the manufacture of serial number 18041213 PEN DOT and/or manufacturing specifications indicated in drawings, bulletins or specifications as called for on the said purchase order. Test reports are on file with us or with our suppliers for examination and indicate conformance with applicable specification requirements. In production items listed, no direct contact was made with mercury, any of its compounds nor with any mercury containing devices employing a single boundary for containment. Tulsa Gas Technologies, Inc. also certifies that the parts listed and shipped on the date indicated are manufactured in accordance with Parker specifications and quality standards, if applicable, as stated on the drawings or specifications called for on said purchase order. All parts and test conform to AGA I-93.

SIGNED BY: *c. r. Hendricks*

TITLE: ASSEMBLY

DATE: 6/6/2018

Tulsa Gas Technologies, Inc.
 4809 S. 101st. E. Ave.
 Tulsa, OK 74146
 918-665-2641

Disp. Serial # 12 041213
 Customer Name PEN DOT
 Customer PO N/A
 Date Required 6/6/2018

ASSEMBLY/CERTIFICATION SHEET

| | SIGN | DATE |
|---|-----------|-----------------|
| 1 <input checked="" type="checkbox"/> Review shop work order versus customer print and history | <u>CK</u> | <u>6/6/2018</u> |
| 2 <input checked="" type="checkbox"/> Component part numbers: _____ Pack dates and/or QC codes <u>5206730642</u> | <u>CK</u> | <u>6/6/2018</u> |
| 3 <input checked="" type="checkbox"/> ID band number <u>5CNG8/5CNG4-0606/0506-128/66-36"</u> | <u>CK</u> | <u>6/6/2018</u> |
| 4 <input checked="" type="checkbox"/> Hose Cut Length <u>36"</u> | <u>CK</u> | <u>6/4/2018</u> |
| 5 _____ Pre-expansion of hose (if required) Size _____ Remarks: _____ | | |
| 6 <input checked="" type="checkbox"/> Audit and mark appropriate insertion depth | <u>CK</u> | <u>6/6/2018</u> |
| 7 _____ Add special accessories _____ Remarks: _____ | | |
| 8 <input checked="" type="checkbox"/> Apply danger tag and ID band | <u>CK</u> | <u>6/6/2018</u> |
| 9 <input checked="" type="checkbox"/> Install bend restrictors Remarks: _____ | <u>CK</u> | <u>6/6/2018</u> |
| 10 <input checked="" type="checkbox"/> Assemble fittings; check insertion depth Remarks: _____ | <u>CK</u> | <u>6/6/2018</u> |
| 11 _____ Set offset angle and/or orientation Remarks: _____ | | |
| 12 <input checked="" type="checkbox"/> Perform crimp or swage on product/crimp set die-using Parker Catalog 4660, page K58 _____ X _____ 1/2) 80C-PO8H _____ 3/8) 80C-PO6H _____ 1/4) 80C-PO4H _____ 1/8) 80C-PO2 _____ 3/8) 80C-PO6 _____ 3/4) 80C-P12H | <u>CK</u> | <u>6/6/2018</u> |
| 13 _____ Add special accessories after crimping/swaging _____ | | |
| 14 _____ Perform and record burst test results, if applicable Remarks: _____ | | |
| 15 _____ Air test, if applicable Test pressure Psi _____ Seconds _____; Pass/Fail (Circle One) Remarks: _____ | | |
| 16 <input checked="" type="checkbox"/> Hydrostatic proof test Test pressure Psi <u>10,000</u> Seconds <u>30</u> ; <u>Pass</u> /Fail (Circle One) Remarks: <u>Passed Pressure Test</u> | <u>CK</u> | <u>6/6/2018</u> |
| 17 <input checked="" type="checkbox"/> Flush method water, and then air | <u>CK</u> | <u>6/6/2018</u> |
| 18 <input checked="" type="checkbox"/> Perform and record conductivity test; Meter <u>Megger Mit200</u> Hose resistance <u>0</u> (-) Electrode resistance <u>0.01</u> 0.01 | <u>CK</u> | <u>6/6/2018</u> |
| 19 <input checked="" type="checkbox"/> Final audit: Check boxes for items inspected, as applicable: _____ X _____ Correct hose; _____ X _____ Correct fittings; _____ X _____ Correct customer PN Check swage or crimp diameters: _____ 5CNG-4-55 .580+-.05 _____ 5CNG-4-58 .785/.805 _____ X _____ 5CNG-8-58 .900/.920 _____ 5CNG-6-55 .675/.695 _____ 5CNG-12-58 1.20/1.22 *****100% VISUAL INSPECT FOR THE FOLLOWING***** _____ X _____ Hose fittings crimped; _____ X _____ Air passes through assembly; _____ X _____ Presence of threads | <u>CK</u> | <u>6/6/2018</u> |
| 20 <input checked="" type="checkbox"/> Cap and package hose | <u>CK</u> | <u>6/6/2018</u> |
| 21 <input checked="" type="checkbox"/> Certificate of Conformance for Materials Shipped (on back) | <u>CK</u> | <u>6/6/2018</u> |

- 3 FITTING TYPE
- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

- 1 58 SERIES
- HOSE SIZE
- 4 1/4"
- 6 3/8"
- 8 1/2"
- 10 5/8"
- 12 3/4"

- 4 FITTING TYPE
- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL


8

- FITTING SIZE
- 4 1/4"
- 6 3/8"
- 8 1/2"
- 12 3/4"

BREAK-AWAY END

11 FILL HOSE LENGTH

FILL END

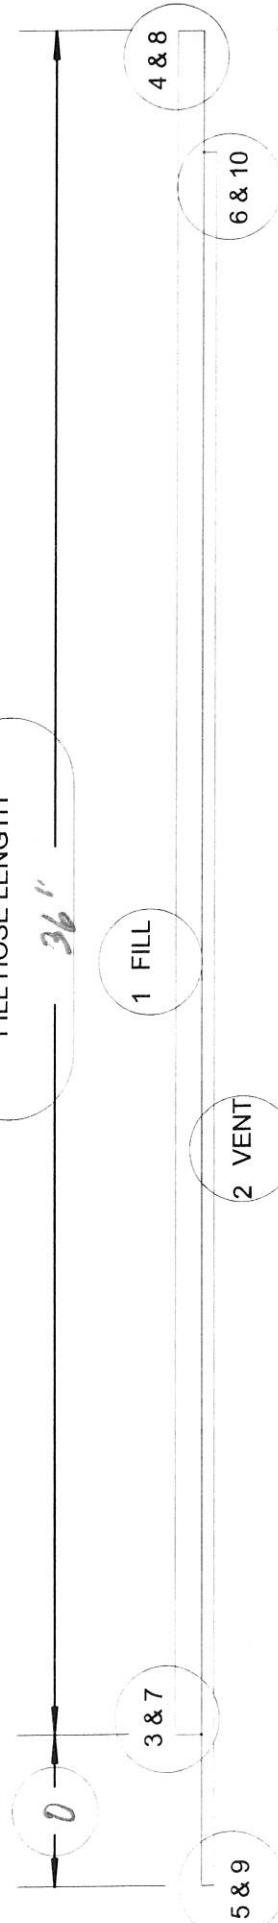

- 5 FITTING TYPE
- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

- 2 55 SERIES
- HOSE SIZE
- 2 1/8"
- 4 1/4"
- 6 3/8"

- 6 FITTING TYPE
- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

10

- FITTING SIZE
- 2 1/8"
- 4 1/4"
- 6 3/8"

STANDARD 3"
SHEREX 5/8"

WORK ORDER # 5/n-1804/213

1 5CNG 8/5CNG A - 06 06 / 05 06 - 12 12 / 6 10 - 36"

FILL HOSE

DATE 03/27/87
DESIGNED BY C. SEWELL
DRAWN BY C.R.S.
DWG NO. FILLHOSE.worfordr.dwg

TULSA GAS TECHNOLOGIES, INC.
10117 LAST 40TH STREET
TULSA, OK 74116
910-666-2641 FAX: 910-666-2657
CHECKED BY:
SCALE NONE
SHEET NO. OF REV. 1

CERTIFICATE OF CONFORMANCE
FOR
MATERIALS SHIPPED

Tulsa Gas Technologies, Inc. (TGT) hereby certifies that all materials in the manufacture of serial number 18041213 PEN DOT.and/or manufacturing specifications indicated in drawings, bulletins or specifications as called for on the said purchase order. Test reports are on file with us or with our suppliers for examination and indicate conformance with applicable specification requirements. In production items listed, no direct contact was made with mercury, any of its compounds nor with any mercury containing devices employing a single boundary for containment. Tulsa Gas Technologies, Inc. also certifies that the parts listed and shipped on the date indicated are manufactured in accordance with Parker specifications and quality standards, if applicable, as stated on the drawings or specifications called for on said purchase order. All parts and test conform to AGA I-93.

SIGNED BY: *C. R. Kendall*

TITLE: ASSEMBLY

DATE: 6/6/2018

Tulsa Gas Technologies, Inc.
 4809 S. 101st. E. Ave.
 Tulsa, OK 74146
 918-665-2641

Disp. Serial # 18041213
 Customer Name PEN DOT
 Customer PO N/A
 Date Required 6/6/2018

ASSEMBLY/CERTIFICATION SHEET

| | | SIGN | DATE |
|----|--|-----------|-----------------|
| 1 | <input checked="" type="checkbox"/> Review shop work order versus customer print and history | <u>CK</u> | <u>6/6/2018</u> |
| 2 | <input checked="" type="checkbox"/> Component part numbers: _____ Pack dates and/or QC codes <u>5206730643</u> | <u>CK</u> | <u>6/6/2018</u> |
| 3 | <input checked="" type="checkbox"/> ID band number <u>5CNG8/5CNG4-0606/0506-128/66-96"</u> | <u>CK</u> | <u>6/6/2018</u> |
| 4 | <input checked="" type="checkbox"/> Hose Cut Length <u>96"</u> | <u>CK</u> | <u>6/4/2018</u> |
| 5 | <input type="checkbox"/> Pre-expansion of hose (if required) Size _____ Remarks: _____ | | |
| 6 | <input checked="" type="checkbox"/> Audit and mark appropriate insertion depth | <u>CK</u> | <u>6/6/2018</u> |
| 7 | <input type="checkbox"/> Add special accessories _____ Remarks: _____ | | |
| 8 | <input checked="" type="checkbox"/> Apply danger tag and ID band | <u>CK</u> | <u>6/6/2018</u> |
| 9 | <input checked="" type="checkbox"/> Install bend restrictors Remarks: _____ | <u>CK</u> | <u>6/6/2018</u> |
| 10 | <input checked="" type="checkbox"/> Assemble fittings; check insertion depth Remarks: _____ | <u>CK</u> | <u>6/6/2018</u> |
| 11 | <input type="checkbox"/> Set offset angle and/or orientation Remarks: _____ | <u>CK</u> | |
| 12 | <input checked="" type="checkbox"/> Perform crimp or swage on product/crimp set die-using Parker Catalog 4660, page K58 <input checked="" type="checkbox"/> 1/2) 80C-PO8H <u>3/8) 80C-PO6H</u> <input type="checkbox"/> 1/4) 80C-PO4H <u>1/8) 80C-PO2</u> <input type="checkbox"/> 3/8) 80C-PO6 <u>3/4) 80C-P12H</u> | <u>CK</u> | <u>6/6/2018</u> |
| 13 | <input type="checkbox"/> Add special accessories after crimping/swaging | | |
| 14 | <input type="checkbox"/> Perform and record burst test results, if applicable Remarks: _____ | | |
| 15 | <input type="checkbox"/> Air test, if applicable Test pressure Psi _____ Seconds _____; Pass/Fail (Circle One) Remarks: _____ | | |
| 16 | <input checked="" type="checkbox"/> Hydrostatic proof test Test pressure Psi <u>10,000</u> Seconds <u>30</u> ; <u>Pass</u> /Fail (Circle One) Remarks: <u>Revised Pressure test</u> | <u>CK</u> | <u>6/6/2018</u> |
| 17 | <input checked="" type="checkbox"/> Flush method water, and then air | <u>CK</u> | <u>6/6/2018</u> |
| 18 | <input checked="" type="checkbox"/> Perform and record conductivity test; Meter <u>Megger Mit200</u> Hose resistance <u>0</u> (-) Electrode resistance <u>0.03</u> 0.03 | <u>CK</u> | <u>6/6/2018</u> |
| 19 | <input checked="" type="checkbox"/> Final audit: Check boxes for items inspected, as applicable: <input checked="" type="checkbox"/> Correct hose; <input checked="" type="checkbox"/> Correct fittings; <input checked="" type="checkbox"/> Correct customer PN Check swage or crimp diameters: _____ 5CNG-4-55 .580+-.05 _____ 5CNG-4-58 .785/.805 <input checked="" type="checkbox"/> 5CNG-8-58 .900/.920 _____ 5CNG-6-55 .675/.695 _____ 5CNG-12-58 1.20/1.22 *****100% VISUAL INSPECT FOR THE FOLLOWING***** <input checked="" type="checkbox"/> Hose fittings crimped; <input checked="" type="checkbox"/> Air passes through assembly; <input checked="" type="checkbox"/> Presence of threads | <u>CK</u> | <u>6/6/2018</u> |
| 20 | <input checked="" type="checkbox"/> Cap and package hose | <u>CK</u> | <u>6/6/2018</u> |
| 21 | <input checked="" type="checkbox"/> Certificate of Conformance for Materials Shipped (on back) | <u>CK</u> | <u>6/6/2018</u> |


0200

- 3 FITTING TYPE FITTING SIZE
- 01 NPT MALE 4 1/4"
- 02 NPT FEMALE 6 3/8"
- 03 JIC MALE 8 1/2"
- 04 SAE 45 MALE 12 3/4"
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

- 1 58 SERIES
- HOSE SIZE
- 4 1/4"
- 6 3/8"
- 8 1/2"
- 10 5/8"
- 12 3/4"

- 4 FITTING TYPE FITTING SIZE
- 01 NPT MALE 4 1/4"
- 02 NPT FEMALE 6 3/8"
- 03 JIC MALE 8 1/2"
- 04 SAE 45 MALE 12 3/4"
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

cut 105"
 11 FILL HOSE LENGTH
 96"

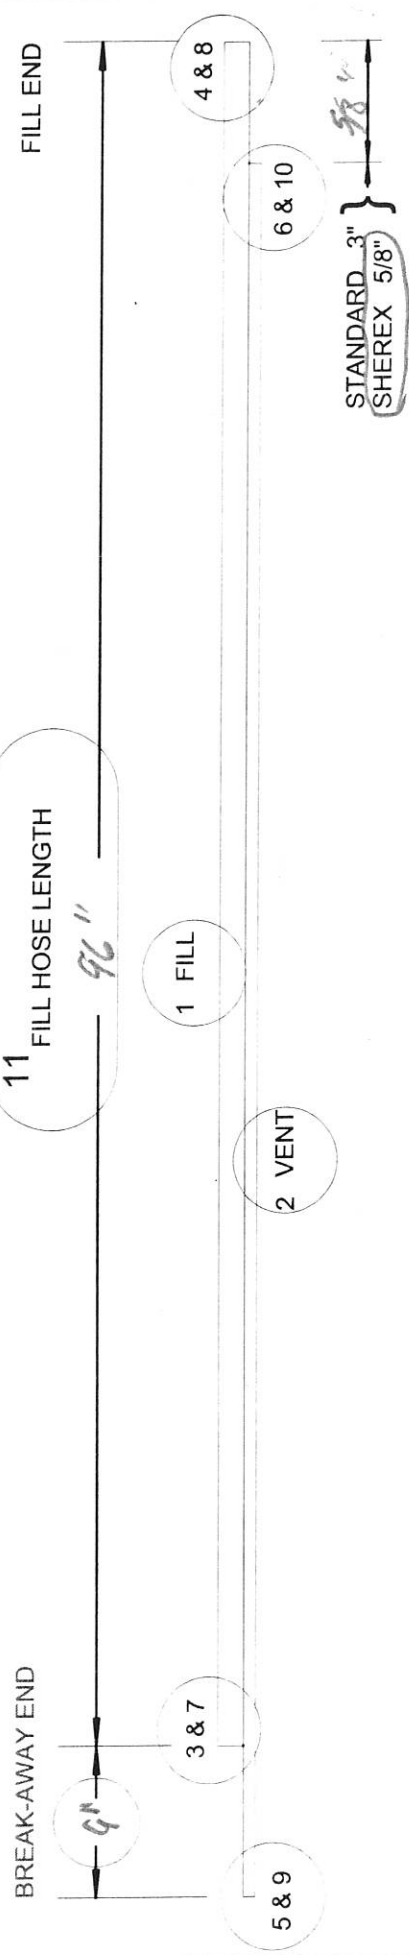

- 5 FITTING TYPE FITTING SIZE
- 01 NPT MALE 2 1/8"
- 02 NPT FEMALE 4 1/4"
- 03 JIC MALE 6 3/8"
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

- 2 55 SERIES
- HOSE SIZE
- 2 1/8"
- 4 1/4"
- 6 3/8"

- 6 FITTING TYPE FITTING SIZE
- 01 NPT MALE 2 1/8"
- 02 NPT FEMALE 4 1/4"
- 03 JIC MALE 6 3/8"
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

STANDARD 3"
 SHEREX 5/8"

w/0 Tril 031918

WORK ORDER # 5/17 18041213

1 5CNG 0/5CNG 4 - 06 06 / 05 06 - 12 8 / 16 4 - 96"

FILL HOSE

DATE: 03/27/97
 DESIGNED BY: C. SEWELL
 DRAWN BY: C.H.S.
 DWG. NO. FILLHOSE_worfordr.dwg

TUSA GAS TECHNOLOGIES, INC.
 10117 EAST 46TH STREET
 TULSA, OK 74116
 918-665-2841 FAX: 918-665-2857
 CHECKED BY:
 SCALE: NONE
 SHEET NO. OF: 1

REV 1

CERTIFICATE OF CONFORMANCE
FOR
MATERIALS SHIPPED

Tulsa Gas Technologies, Inc. (TGT) hereby certifies that all materials in the manufacture of serial number 18041213 PEN DOT.and/or manufacturing specifications indicated in drawings, bulletins or specifications as called for on the said purchase order. Test reports are on file with us or with our suppliers for examination and indicate conformance with applicable specification requirements. In production items listed, no direct contact was made with mercury, any of its compounds nor with any mercury containing devices employing a single boundary for containment. Tulsa Gas Technologies, Inc. also certifies that the parts listed and shipped on the date indicated are manufactured in accordance with Parker specifications and quality standards, if applicable, as stated on the drawings or specifications called for on said purchase order. All parts and test conform to AGA I-93.

SIGNED BY: _____

TITLE: ASSEMBLY

DATE: 6/6/2018

Tulsa Gas Technologies, Inc.
 4809 S. 101st. E. Ave.
 Tulsa, OK 74146
 918-665-2641

Disp. Serial # 18041213
 Customer Name PEN DOT
 Customer PO N/A
 Date Required 6/6/2018

ASSEMBLY/CERTIFICATION SHEET

| | | SIGN | DATE |
|----|---|-----------|-----------------|
| 1 | <input checked="" type="checkbox"/> Review shop work order versus customer print and history | <u>CK</u> | <u>6/6/2018</u> |
| 2 | <input checked="" type="checkbox"/> Component part numbers: _____ Pack dates and/or QC codes <u>5222715607</u> | <u>CK</u> | <u>6/6/2018</u> |
| 3 | <input checked="" type="checkbox"/> ID band number <u>5CNG12/5CNG6-0606/0506-1212/66-96"</u> | <u>CK</u> | <u>6/6/2018</u> |
| 4 | <input checked="" type="checkbox"/> Hose Cut Length <u>96"</u> | <u>CK</u> | <u>6/4/2018</u> |
| 5 | Pre-expansion of hose (if required) Size _____ Remarks: _____ | | |
| 6 | <input checked="" type="checkbox"/> Audit and mark appropriate insertion depth | <u>CK</u> | <u>6/6/2018</u> |
| 7 | Add special accessories _____ Remarks: _____ | | |
| 8 | <input checked="" type="checkbox"/> Apply danger tag and ID band | <u>CK</u> | <u>6/6/2018</u> |
| 9 | <input checked="" type="checkbox"/> Install bend restrictors Remarks: _____ | <u>CK</u> | <u>6/6/2018</u> |
| 10 | <input checked="" type="checkbox"/> Assemble fittings; check insertion depth Remarks: _____ | <u>CK</u> | <u>6/6/2018</u> |
| 11 | Set offset angle and/or orientation Remarks: _____ | | |
| 12 | <input checked="" type="checkbox"/> Perform crimp or swage on product/crimp set die-using Parker Catalog 4660, page K58 _____ 1/2) 80C-PO8H _____ 3/8) 80C-PO6H _____ 1/4) 80C-PO4H _____ 1/8) 80C-PO2 _____ 3/8) 80C-PO6 <u>X</u> 3/4) 80C-P12H | <u>CK</u> | <u>6/6/2018</u> |
| 13 | Add special accessories after crimping/swaging _____ | | |
| 14 | Perform and record burst test results, if applicable Remarks: _____ | | |
| 15 | Air test, if applicable Test pressure Psi _____ Seconds _____; Pass/Fail (Circle One) Remarks: _____ | | |
| 16 | <input checked="" type="checkbox"/> Hydrostatic proof test Test pressure Psi <u>10,000</u> Seconds <u>30</u> ; <u>Pass</u> Fail (Circle One) Remarks: <u>Passed Pressure Test</u> | <u>CK</u> | <u>6/6/2018</u> |
| 17 | <input checked="" type="checkbox"/> Flush method water, and then air | <u>CK</u> | <u>6/6/2018</u> |
| 18 | <input checked="" type="checkbox"/> Perform and record conductivity test; Meter <u>Megger Mit200</u> Hose resistance <u>0</u> (-) Electrode resistance <u>0.03</u> 0.03 | <u>CK</u> | <u>6/6/2018</u> |
| 19 | <input checked="" type="checkbox"/> Final audit: Check boxes for items inspected, as applicable: <input checked="" type="checkbox"/> Correct hose; <input checked="" type="checkbox"/> Correct fittings; <input checked="" type="checkbox"/> Correct customer PN Check swage or crimp diameters: _____ 5CNG-4-55 .580+-.05 _____ 5CNG-4-58 .785/.805 _____ 5CNG-8-58 .900/.920 _____ 5CNG-6-55 .675/.695 <u>X</u> _____ 5CNG-12-58 1.20/1.22 *****100% VISUAL INSPECT FOR THE FOLLOWING***** <input checked="" type="checkbox"/> Hose fittings crimped; <input checked="" type="checkbox"/> Air passes through assembly; <input checked="" type="checkbox"/> Presence of threads | <u>CK</u> | <u>6/6/2018</u> |
| 20 | <input checked="" type="checkbox"/> Cap and package hose | <u>CK</u> | <u>6/6/2018</u> |
| 21 | <input checked="" type="checkbox"/> Certificate of Conformance for Materials Shipped (on back) | <u>CK</u> | <u>6/6/2018</u> |

0.03

- 3 FITTING TYPE
- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

- 1 58 SERIES
- HOSE SIZE
- 4 1/4"
- 6 3/8"
- 8 1/2"
- 10 5/8"
- 12 3/4"

- 4 FITTING TYPE
- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

- 8 FITTING SIZE
- 4 1/4"
- 6 3/8"
- 8 1/2"
- 12 3/4"

BREAK-AWAY END

9"

3 & 7

5 & 9

11 FILL HOSE LENGTH

96"

1 FILL

2 VENT

4 & 8

6 & 10

FILL END

CUT 105"

STANDARD 3" SHEREX 5/8" } 5/8"

- 5 FITTING TYPE
- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

- 2 55 SERIES
- HOSE SIZE
- 2 1/8"
- 4 1/4"
- 6 3/8"

- 6 FITTING TYPE
- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

- 10 FITTING SIZE
- 2 1/8"
- 4 1/4"
- 6 3/8"

v10 Tr 11 031918

S/N-18041213

WORK ORDER # 1 2 3 4 5 6 7 8 9 10 11

5CNG12/5CNG6-0606/0506-1212/66-96"

CERTIFICATE OF CONFORMANCE
FOR
MATERIALS SHIPPED

Tulsa Gas Technologies, Inc. (TGT) hereby certifies that all materials in the manufacture of serial number 18041213 PEN DOT, and/or manufacturing specifications indicated in drawings, bulletins or specifications as called for on the said purchase order. Test reports are on file with us or with our suppliers for examination and indicate conformance with applicable specification requirements. In production items listed, no direct contact was made with mercury, any of its compounds nor with any mercury containing devices employing a single boundary for containment. Tulsa Gas Technologies, Inc. also certifies that the parts listed and shipped on the date indicated are manufactured in accordance with Parker specifications and quality standards, if applicable, as stated on the drawings or specifications called for on said purchase order. All parts and test conform to AGA I-93.

SIGNED BY: *C. R. Kendall*

TITLE: ASSEMBLY

DATE: 6/6/2018

U.V.I

- 3 FITTING TYPE
- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

- 1 58 SERIES
- HOSE SIZE
- 4 1/4"
- 6 3/8"
- 8 1/2"
- 10 5/8"
- 12 3/4"

- 4 FITTING TYPE
- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL


8

- FITTING SIZE
- 4 1/4"
- 6 3/8"
- 8 1/2"
- 12 3/4"

BREAK-AWAY END

11 FILL HOSE LENGTH

FILL END

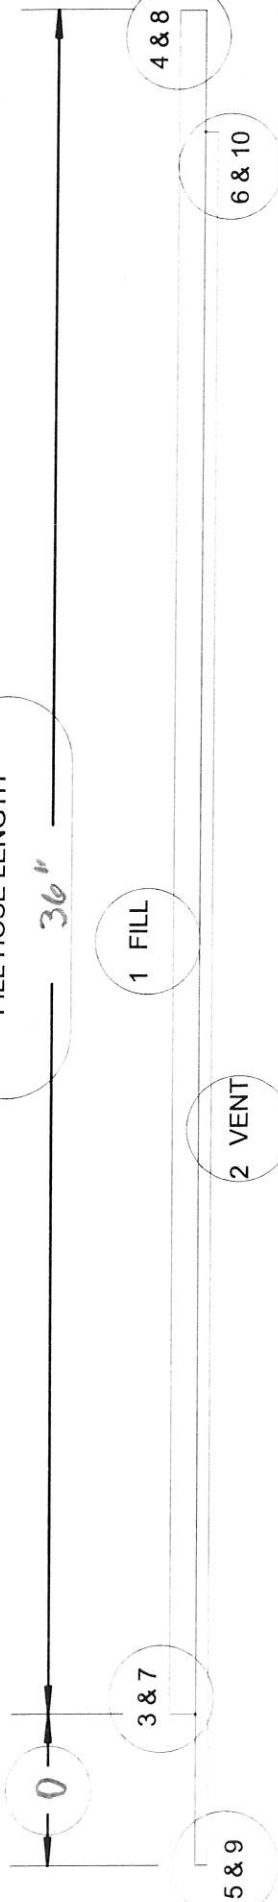

1 FILL

2 VENT

3 & 7

5 & 9

6 & 10

4 & 8

- 5 FITTING TYPE
- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

- 2 55 SERIES
- HOSE SIZE
- 2 1/8"
- 4 1/4"
- 6 3/8"

- 6 FITTING TYPE
- 01 NPT MALE
- 02 NPT FEMALE
- 03 JIC MALE
- 04 SAE 45 MALE
- 05 SAE O-RING STRAIGHT THREAD
- 06 JIC FEMALE SWIVEL
- 07 FEMALE PIPE SWIVEL

10

- FITTING SIZE
- 2 1/8"
- 4 1/4"
- 6 3/8"

STANDARD 3" SHEREX 5/8"

WORK ORDER # 5/n-18041213

1
 5CNG12/5CNG6-0606/0506-1212/66-36"

FILL HOSE

DATE: 03/27/97
 DESIGNED BY: C. SEWELL
 DRAWN BY: C.R.S.
 CHECKED BY:
 SCALE: NONE
 DWG NO: FILLHOSE.worforder.dwg2 SHEET NO. OF REV. 1

TULSA GAS TECHNOLOGIES, INC.
 10117 EAST 40TH STREET
 TULSA, OK 74130
 918-665-2641 FAX: 918-665-2667